




Eton FRX3 I/O Board Replacement

The I/O board houses the 3.5mm plugs for an AUX...

Written By: Md Siamul Islam

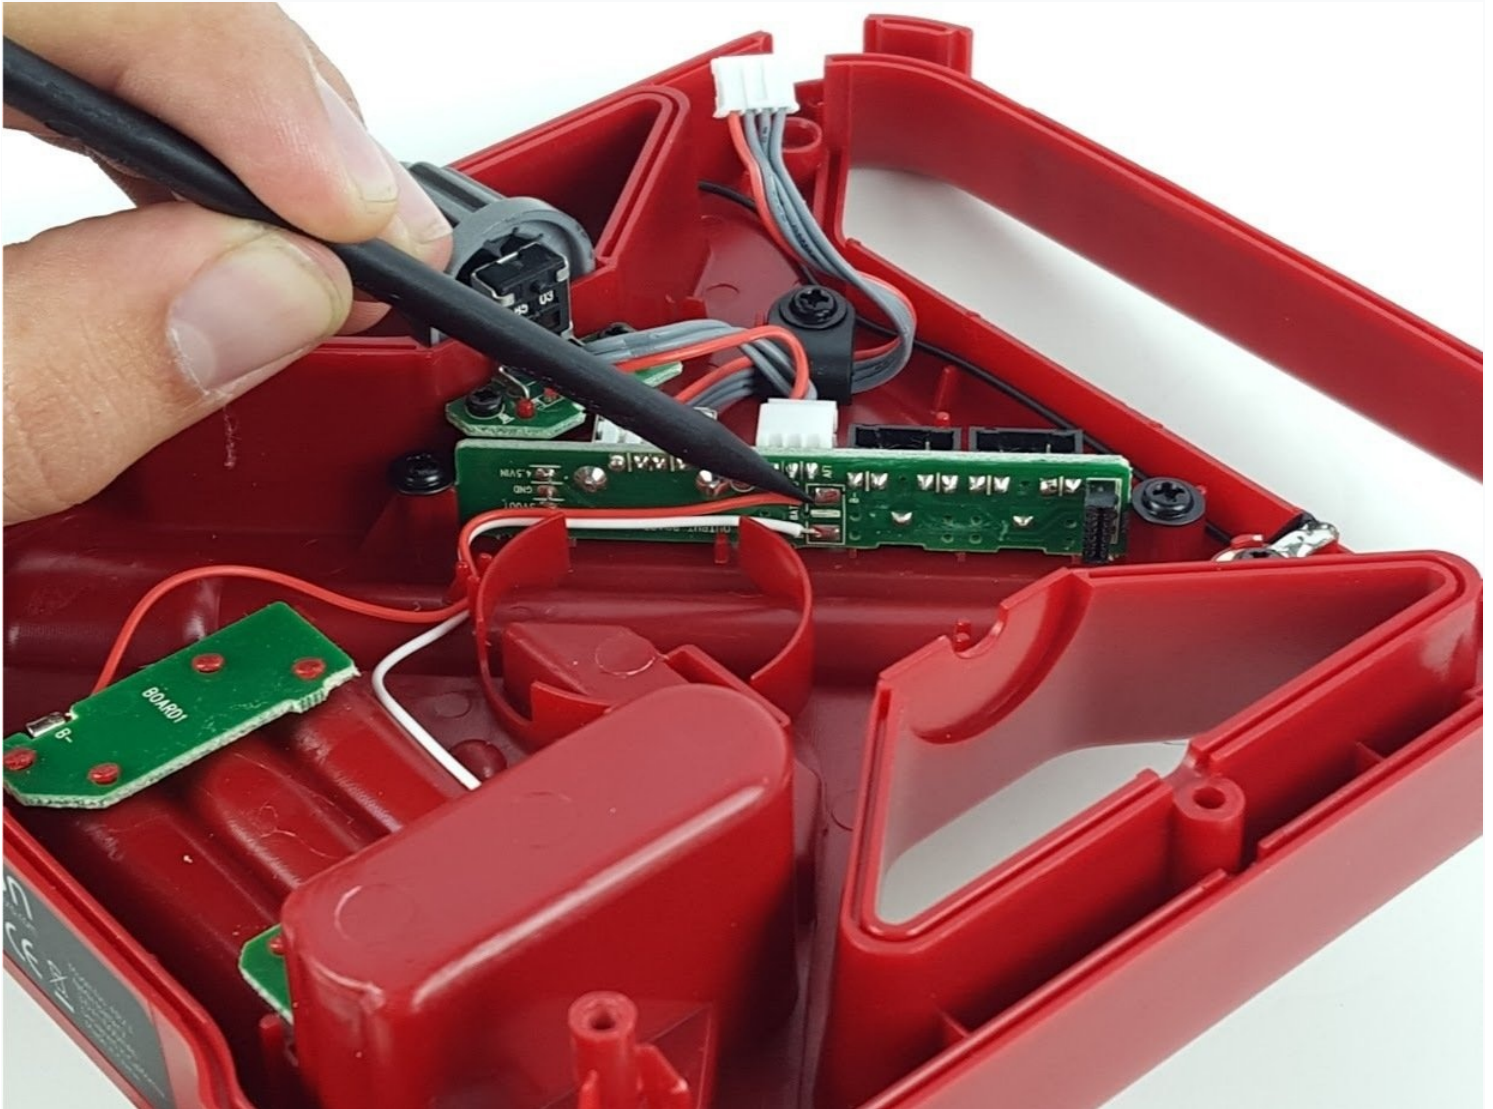

INTRODUCTION

The I/O board houses the 3.5mm plugs for an AUX input and headphone output, the USB charging plug for a smartphone, and a DC input. In the case that any of these are damaged, the entire board may need to be replaced.

TOOLS:

[iFixit Opening Tool](#) (1)

[Soldering Iron 60w Hakko 503F](#) (1)

[Lead-Free Solder](#) (1)

[Phillips #00 Screwdriver](#) (1)

[Phillips #0 Screwdriver](#) (1)

[Phillips #1 Screwdriver](#) (1)

[TR10 Torx Security Screwdriver](#) (1)

Step 1 — Rechargeable Battery Pack



- Pull the plastic tab on the battery compartment cover panel to loosen it, then pull the panel off.

Step 2



- Disconnect the battery pack wires from the device and remove the battery pack.

Step 3 — Case Assembly



- On the bottom of the device case's face are two T10 screws. Use a T10 Torx screwdriver to remove the two screws.

Step 4



- While using the T10 screwdriver, remove the two T10 screws on the back of the device's case.

Step 5



- Remove the two Phillips #00 screws located in the center of the back of the device.
- ① You will need to use a thin shafted screwdriver or a female hexagonal bit that is found in the iFixit 54 bit toolkit to extend the reach of the Phillips #00 bit.

Step 6





- On the bottom of the device's case there are two rubber feet. Pry the rubber feet off of the case.
- ★ Try to keep the adhesive on the rubber feet as clean as possible to insure that they can be reattached during reassembly.

Step 7




- Pull the two halves of the device's case apart.
- ⚠ Take care when pulling the two halves apart. There are three cables that connect components of the device to the motherboard. Disconnect these cables in order to separate the two halves of the device's case.

Step 8 — I/O Board

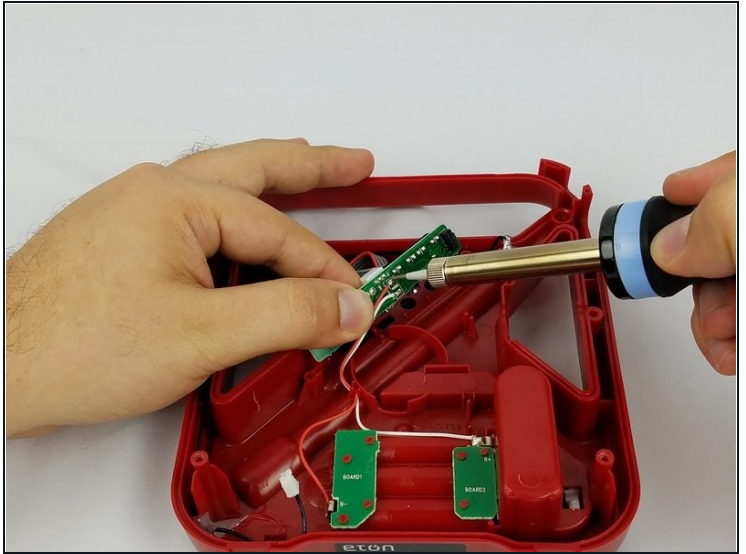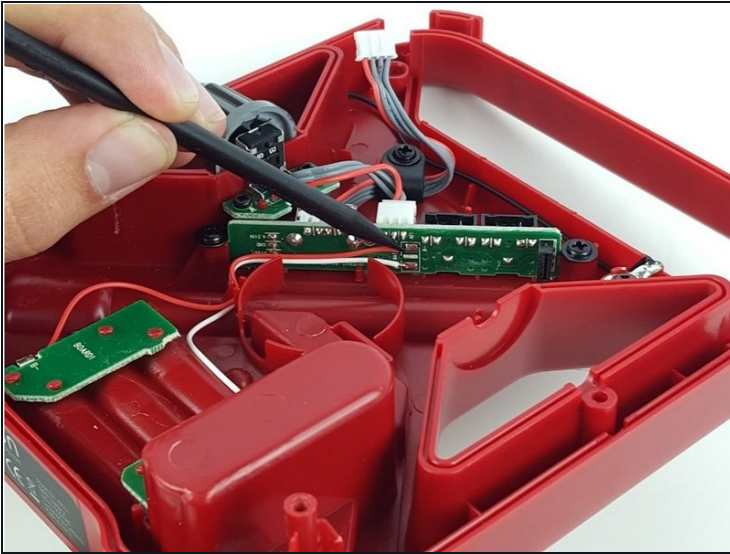


- Unsolder the red and white wires where the backup batteries connect to the I/O board.

Step 9

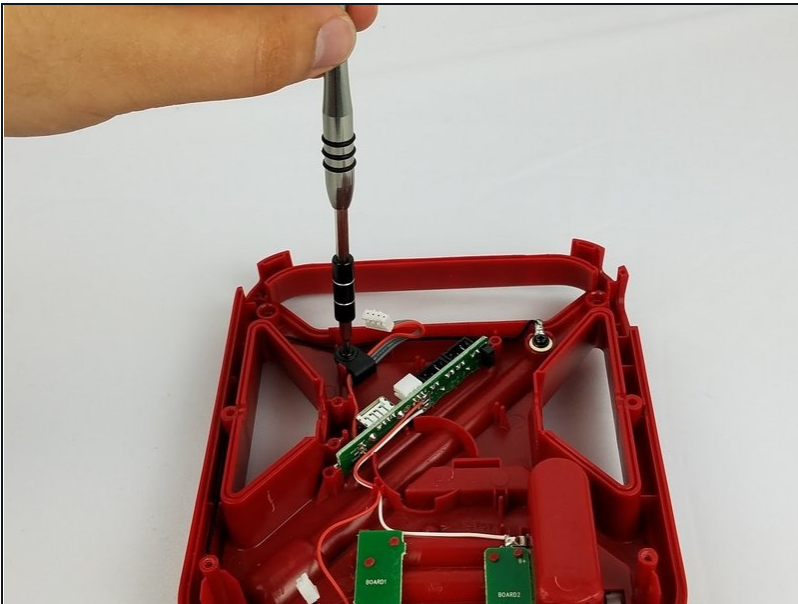


- Just above the I/O board, there is a small clip securing the wire to the motherboard. Remove the Philips #1 screw and lift it up.

Step 10

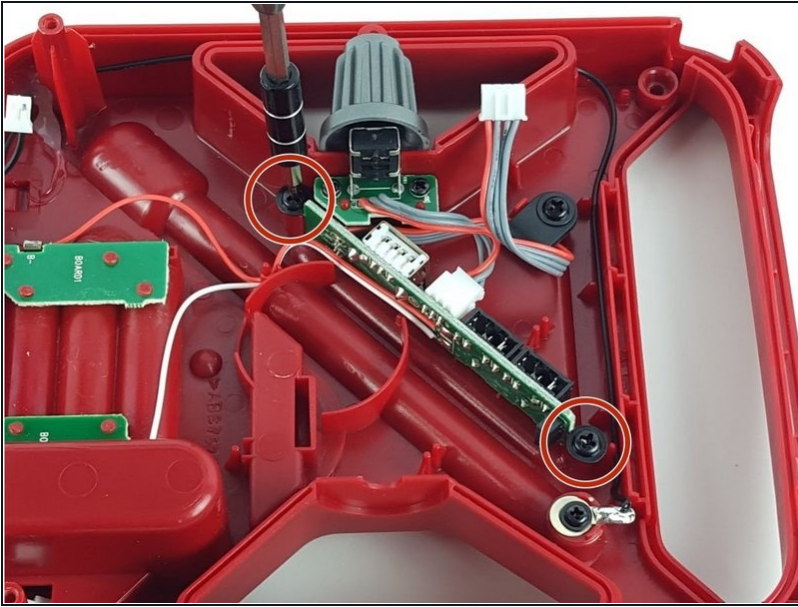

- Remove the two Philips #1 screws that secure the I/O board to the case.

Step 11

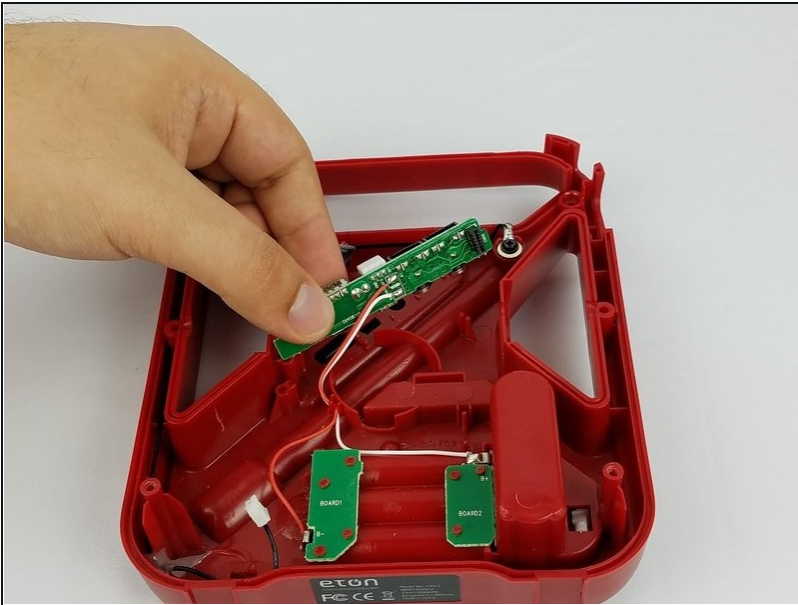

- Gently lift the I/O board straight upwards to remove it.

To reassemble your device, follow these instructions in the reverse order.