




# Asus Zen AiO Pro Z240IC Motherboard Replacement

How to replace the motherboard on the Asus Zen AiO Pro Z240IC to fix boot-up issues.

Written By: Daniel Rivers

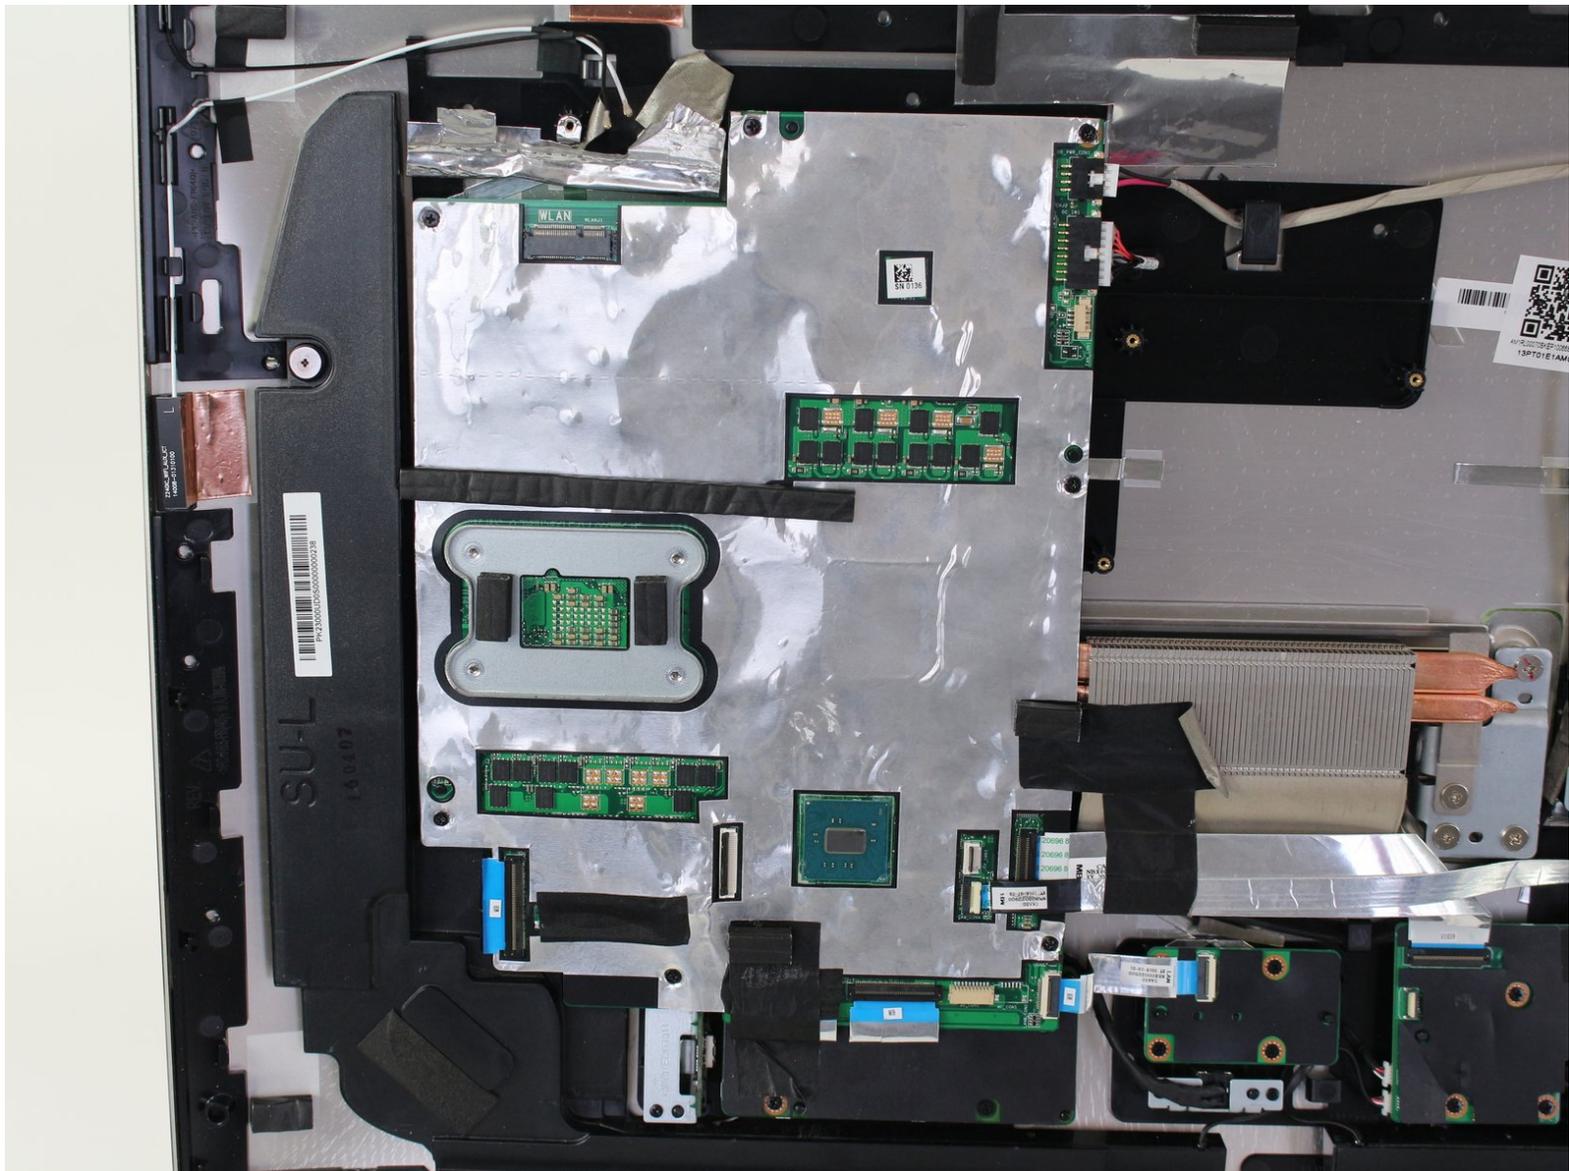

## INTRODUCTION

Use this guide to replace the Asus Zen AiO Pro Z240IC's motherboard to fix boot-up issues. No prior knowledge is required. All you need is a Phillips head screwdriver and plastic opening tools.

---

### TOOLS:

- [Phillips #0 Screwdriver](#) (1)
  - [Phillips #1 Screwdriver](#) (1)
  - [iFixit Opening Tools](#) (1)
-

## Step 1 — Screen



- Use the plastic opening tool to pry off the black plastic strip at the bottom of the screen by wiggling the tool between the strip and the screen.
- ⓘ The strip is held in place with adhesive. You may hear a crackling sound as the strip is peeled off.
- Run the opening tool slowly along the base of the screen, peeling the black strip back, until the opposite end of the screen is reached.

## Step 2



- Use a Phillips #1 screwdriver to remove the seven (7) 4.8 mm screws from the base of the screen.

### Step 3





- Place the computer on its back, facing up.
  - Wedge the plastic opening tool in between the screen and the bezel of the aluminum computer casing.
  - Move the tool along the entire edge of the screen with an up-and-down prying motion to loosen the screen from the casing. Do not lift the entire screen away from the computer yet.
- i** The screen is held in place by plastic tabs. These will create a popping sound when loosened.
- !** The screen assembly will flex as it is pried off. Do not bend the screen too far or the glass screen could shatter.

## Step 4



- Lift the screen from the bottom edge by about 6 inches. Prop it open with one hand.
- Look inside the computer and locate five (5) cables that connect the embedded components of the screen (camera, microphone, etc.) to the rest of the computer.

## Step 5

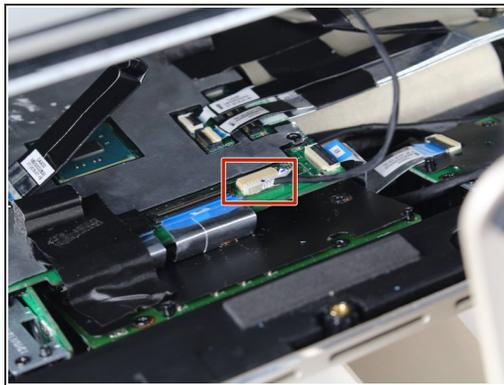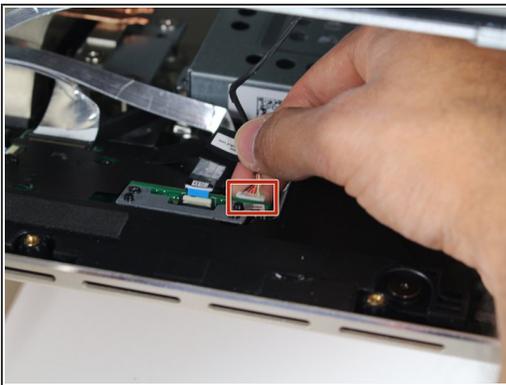

- Remove the two (2) cables that are connected to the computer by white, rectangular terminal blocks by pulling straight out on the plug.
- ⓘ The cables and wires in these steps are delicate; do not tug on the individual wires that make up each cable.

## Step 6



- Use a finger to lift the plastic locking flaps that hold the remaining three (3) ribbon cables in place.
- Remove the cables from their terminals by slipping them away from their connectors.
- ☑ The black line on the ribbon cables mark the connecting region. When reinstalling, insert the cable up to this line so the locking flap covers it.

## Step 7 — WiFi (WLAN) Card




- Locate the WLAN card in the upper left hand corner of the computer.
- Use a Phillips #1 screwdriver to remove the 3.2 mm screw on the top of the WLAN card.

## Step 8



- Pull out the WLAN card from its socket.
- Remove the two antennae wires from the WLAN card by pulling up on the coaxial connectors.

## Step 9 — Fan

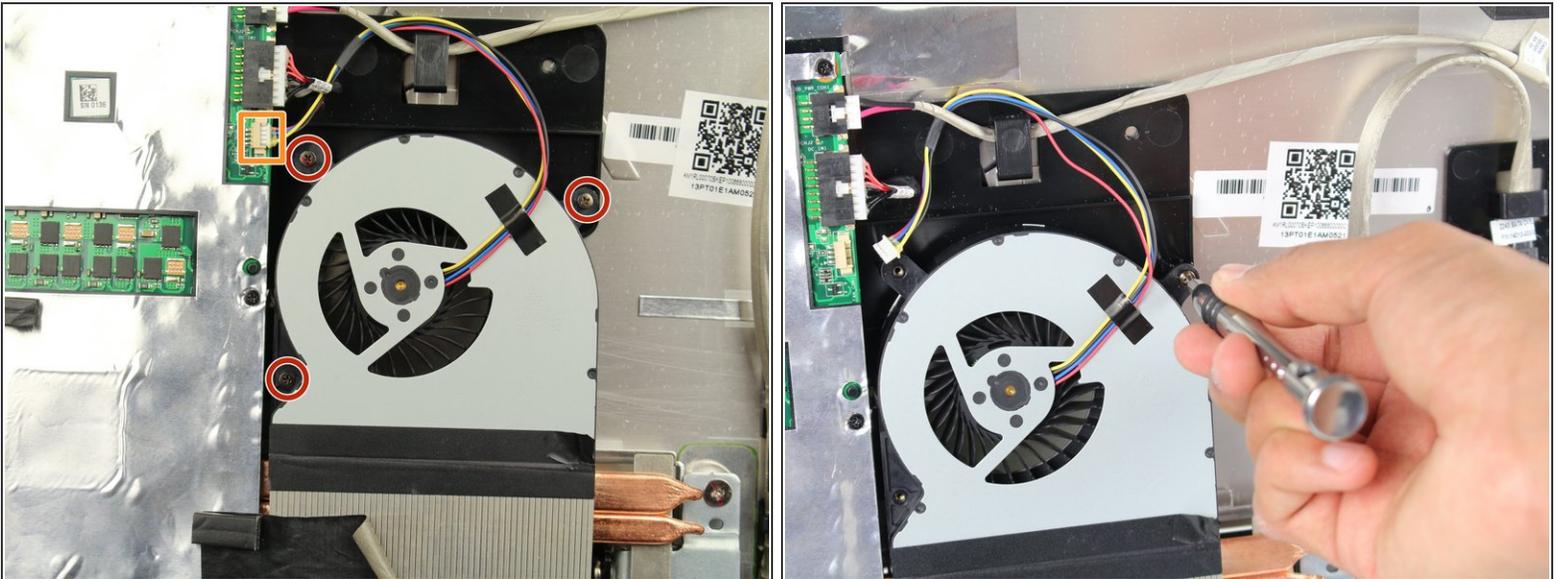


- Use a Phillips #0 screwdriver to remove the three (3) 4.8 mm screws from the fan unit.
- Remove the cable connecting the fan to the motherboard by pulling the cable out of its socket.

## Step 10





- Remove the fan by peeling off the black electrical tape holding it against the heat sink vents.

## Step 11 — Motherboard

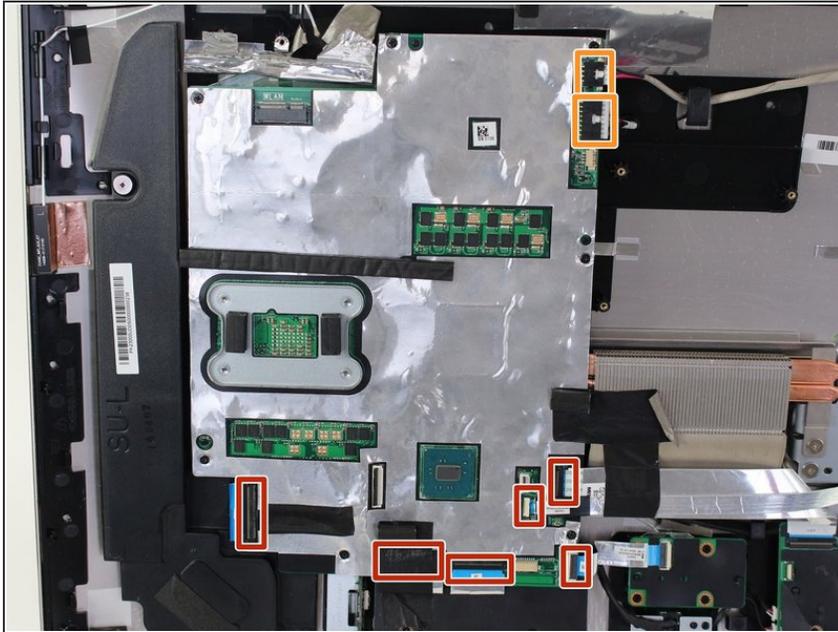



- Remove the six (6) ribbon cables by lifting up on the plastic locking tabs and then slipping the cables out of their sockets.
- Remove the other two (2) cables by pulling straight out on the white connectors.
- ⓘ One ribbon cable is hidden beneath black tape.
- ⚠ The motherboard is ESD sensitive. Limit your contact with the green circuit board surface and electrical components. When handling the board, hold it by the edges.
- ★ The black lines on the ribbon cables mark the connecting region. When reinstalling, insert the cables up to this line so the locking flap covers it.

## Step 12

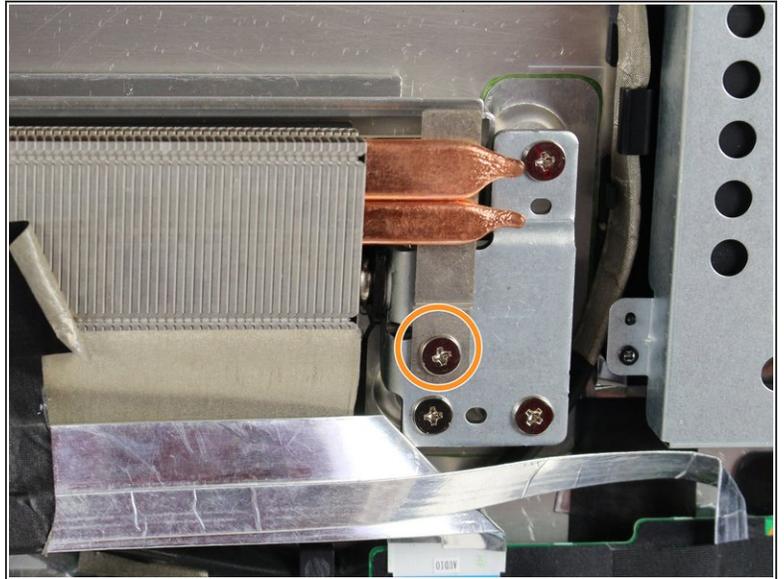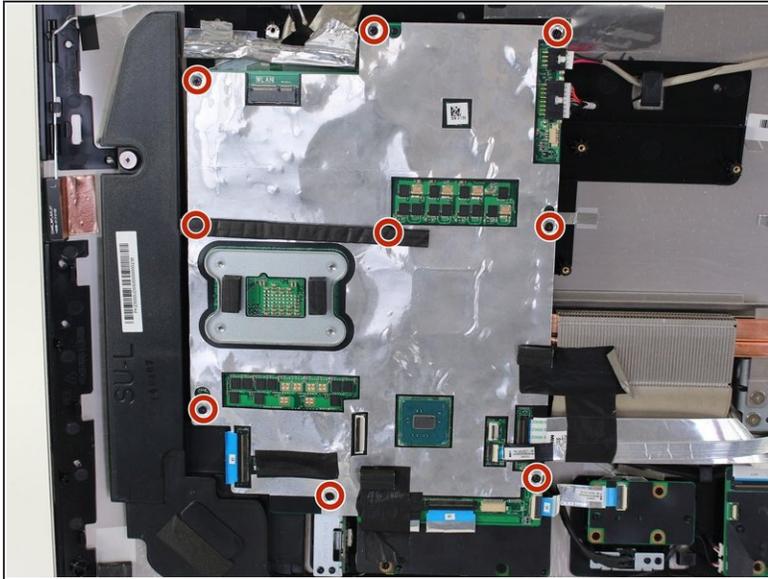



- Use a Phillips #1 screwdriver to remove nine (9) 3.2 mm screws from the motherboard.
- ⓘ Two of the screws near the middle of the board are hidden beneath padding.
- Use a Phillips #1 screwdriver to remove the one (1) 4.8 mm screw directly below the copper heat sink channel.

## Step 13

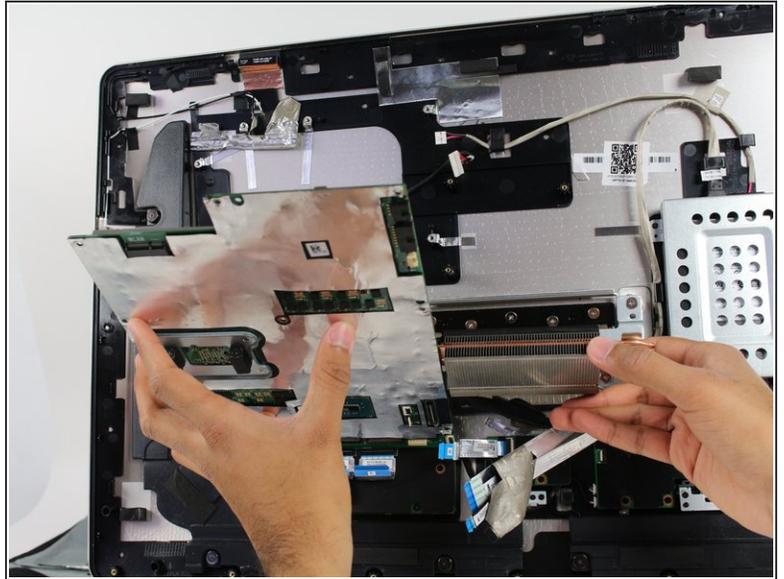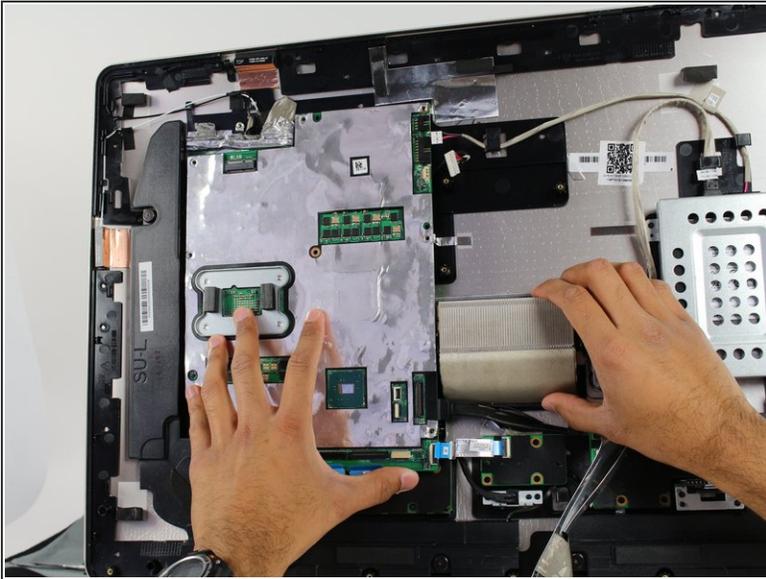

- Lift the motherboard just enough to dismount it from the plastic pegs that hold it in place.
- Rotate the motherboard towards yourself while supporting the heat sink by pivoting on its bottom edge.

## Step 14

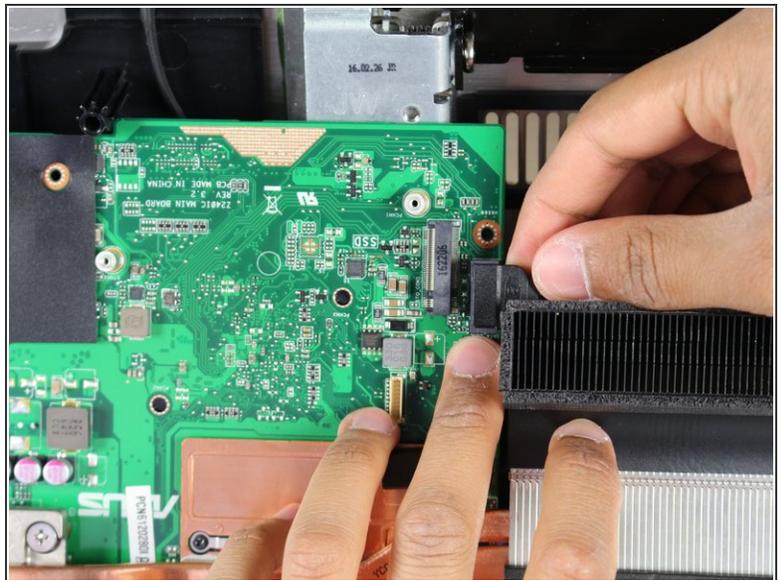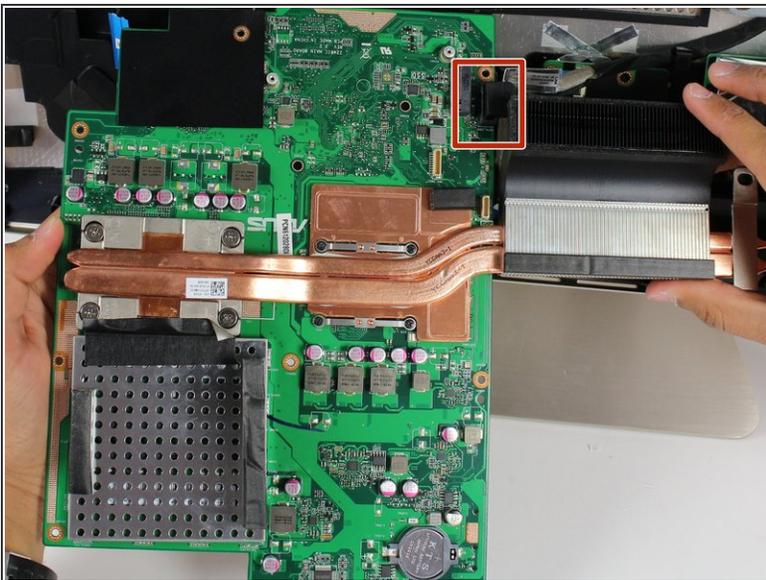

- Remove the SATA cable on the opposite side of the motherboard by pulling directly up from the board.

To reassemble your device, follow these instructions in reverse order.