



Solio Rocsta Charging Indicator Button Replacement

In this guide, we will show you how to change the charging indicator button of the Solio Rocsta.

Written By: David Vazquez



INTRODUCTION


With just the push of a button, the charging indicator button to tell you the power status of your Rocsta Solio charger. In this guide, we will show you how to replace the charging indicator button if it no longer functions properly.

Please note that this guide requires soldering. For more information on how to solder and desolder connections, please visit [this guide](#).

TOOLS:


- [T6 Torx Screwdriver](#) (1)
 - [iFixit Opening Tools](#) (1)
 - [Precision Tweezers Set](#) (1)
 - [Soldering Iron](#) (1)
 - [Spudger](#) (1)
-

Step 1 — Solio Rocsta Top Cover Disassembly

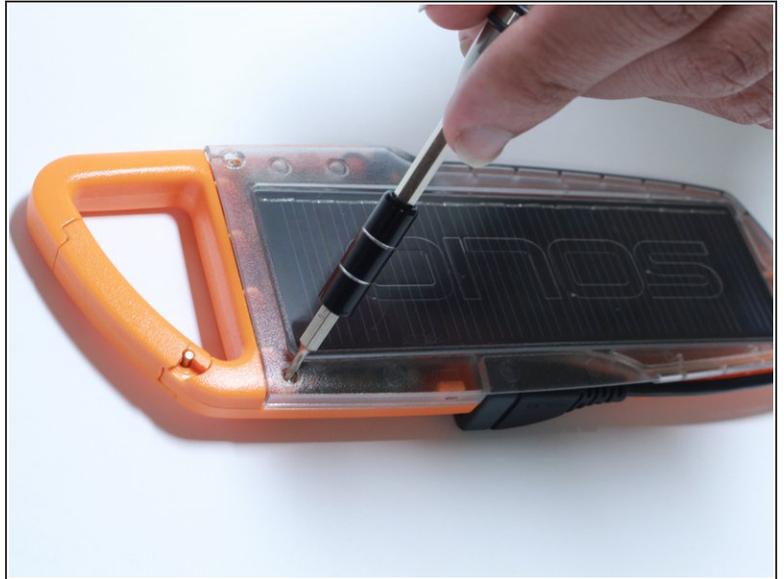

- Locate, and unscrew, the three 5.72 mm screws that hold down the top cover using the T6 Torx screwdriver.

Step 2

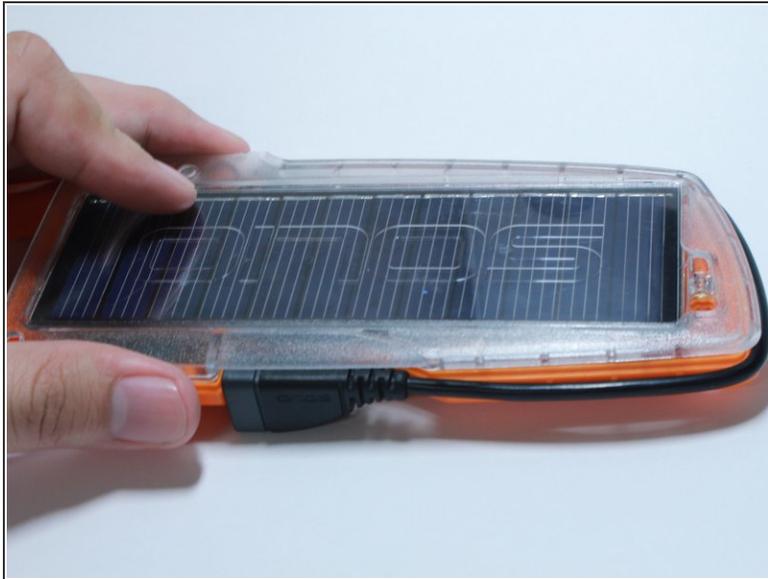

- Remove top cover.


⚠ Caution: the solar cell is attached to the top cover and connected to the circuit board by a short wire .

Step 3 — Battery




- Using the spudger, pry the battery off the back cover.

Step 4

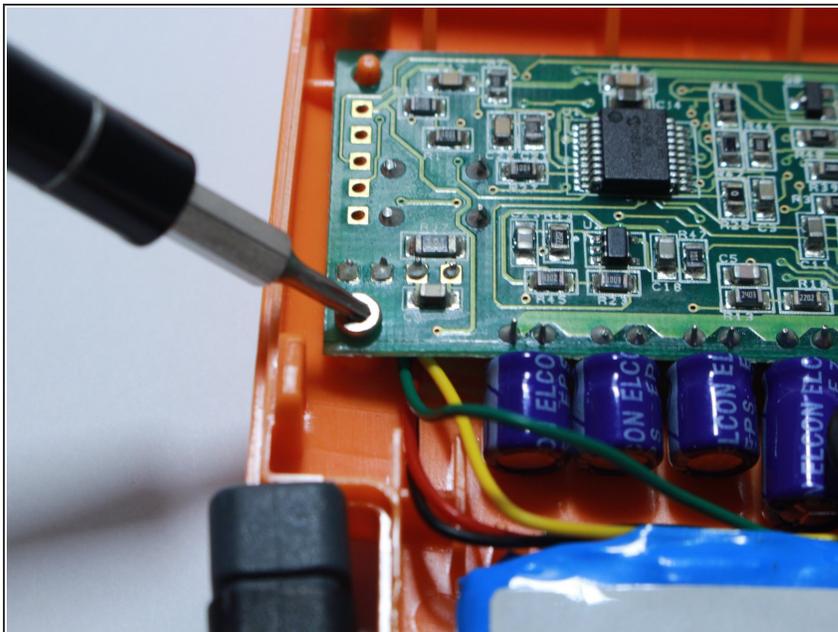


- Using a T6 Torx screwdriver, unscrew the 5.66 mm screws attaching the circuit board to the case and flip the circuit board.

Step 5

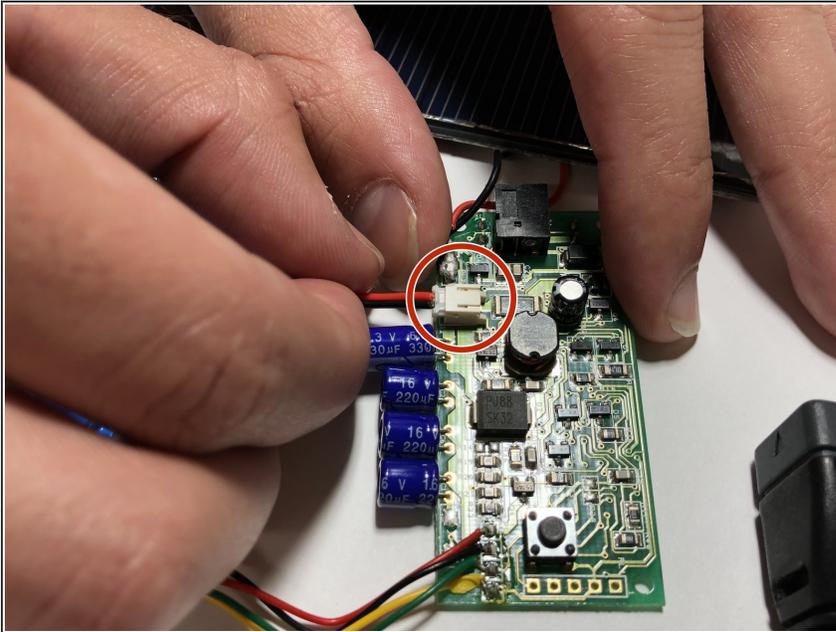


- With the circuit board flipped, locate the battery connector.
- Hold the component attached to the circuit board the battery is connected to and wiggle the cable out.

Step 6 — Charging Indicator Button

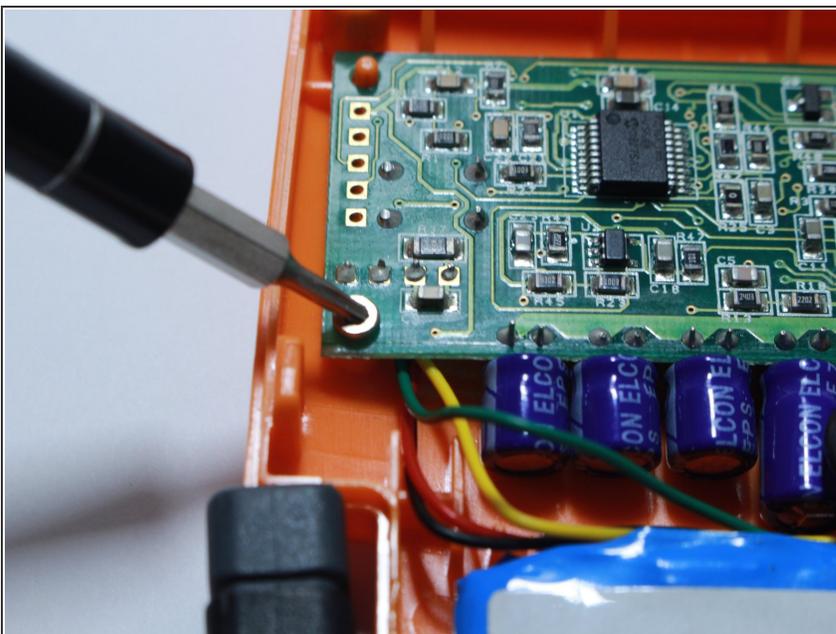


- Unscrew the 5.66 mm screws attaching the circuit board to the case.

Step 7

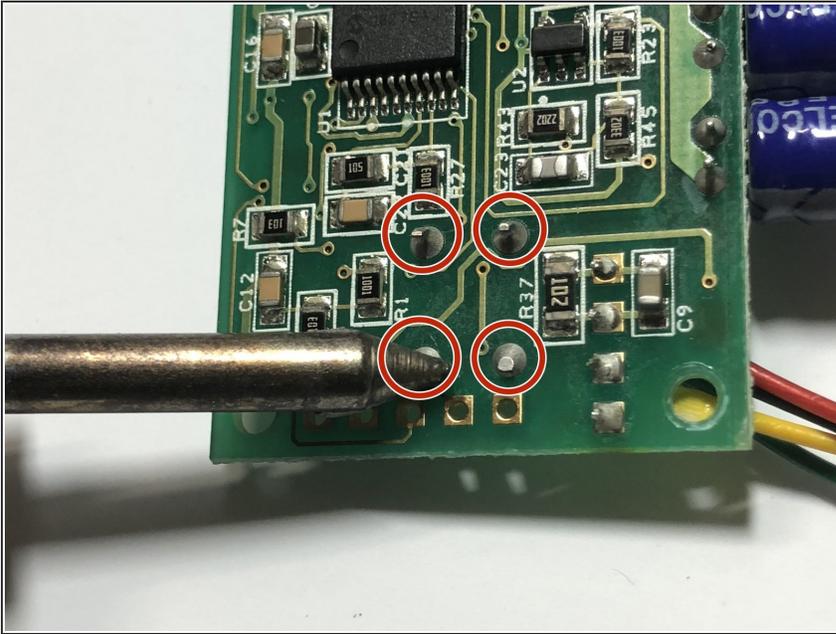

- With a Soldering Iron desolder the charging indicator button connectors.
- ⓘ For more information on how to solder and desolder connections, please visit [this guide](#).

Step 8

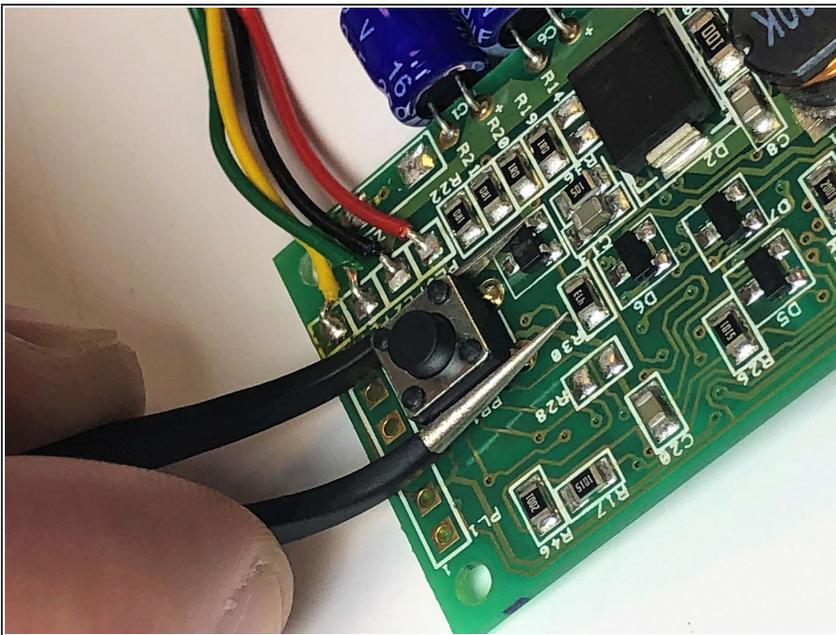

- Gently pry the charging indicator button using one of the Precision Tweezers.

To reassemble your device, follow these instructions in reverse order.