



Lenovo Yoga 720 Speaker Replacement

This guide will show how to replace the speakers.

Written By: Aiden Baker



INTRODUCTION

This guide will show you how to replace the speakers.



TOOLS:

- [T5 Torx Screwdriver](#) (1)
 - [iFixit Opening Tools](#) (1)
 - [JIS #1](#) (1)
-

Step 1 — Bottom Cover



- i Before you begin, be sure to turn off your laptop and discharge the battery down to 25%.
- i Start by flipping the device over so that you see the screws.
 - Remove seven Torx T5 short screws.
 - Remove three Torx T5 long screws.

Step 2




- Starting from the USB port, use your opening tool to gently pry up the case .
 - i Make sure you are prying on the cover itself, not the metal shield around the USB port.
- Pry along the laptop in the order shown by the arrows.
- i Do NOT pry along the top side, or you risk damaging the casing. Stay with the arrows.

Step 3




- Lift the case from the bottom side. NOT the side with the hinges.
⚠ When you feel resistance, do NOT keep lifting or you will damage the housing.
- Once you feel resistance, gently pull the case towards you. (away from the hinges.)
- Remove the case.

Step 4 — Battery

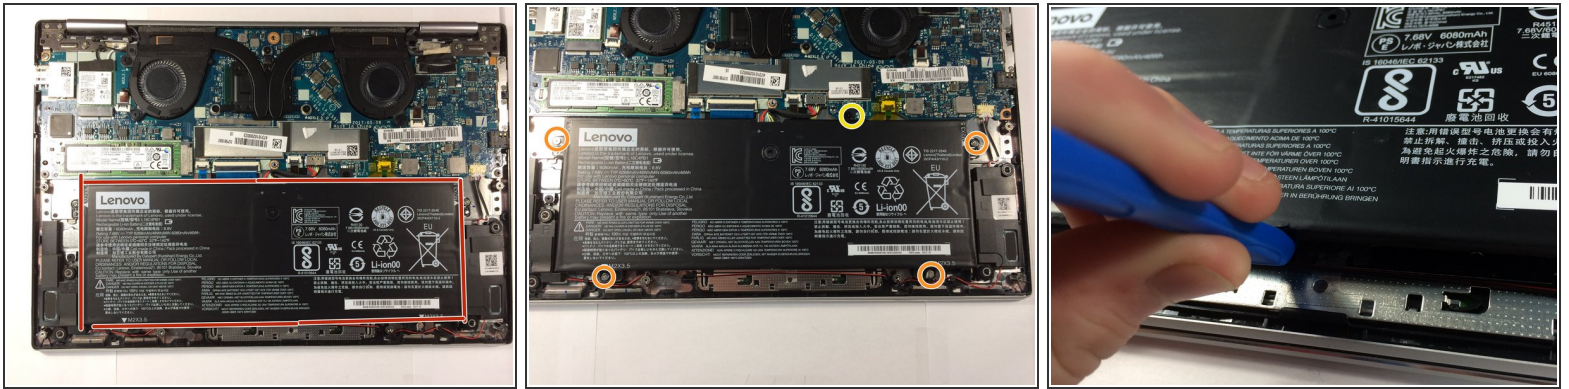


- This is the battery. For guides that are for other parts, the battery is removed for the reason of it being a pain to connect or disconnect while screwed in.
 - ⚠ Be careful not to short anything on the motherboard, as the battery cannot be disconnected before removal.
- Remove four [J1 Philips screws](#).
- Remove one J1 philips screw.
 - ⓘ Do not mix these screws up. If you put the longer screw where the shorter screw belongs, you will damage the shield around the keyboard.
- Lift the battery slightly using your plastic opening tool.
 - ⚠ Do not lift the battery out all the way, as it is still connected to the motherboard.
 - ⚠ Do NOT puncture or deform the battery or it may catch fire or even explode.

Step 5

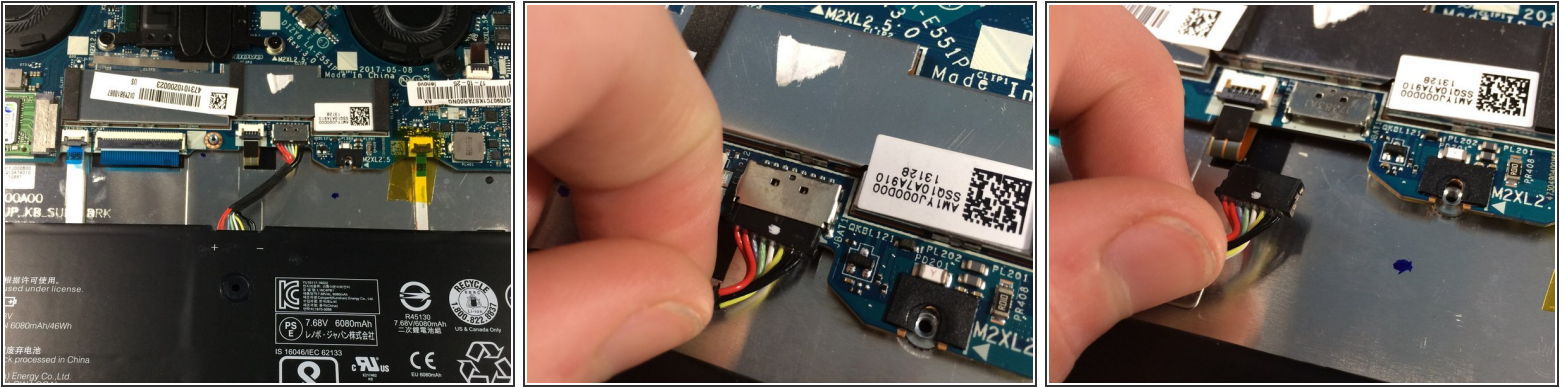




- Pull the battery towards you until the wire is accessible.
- gently tug and wiggle on the wire until it pops out.
- Remove the battery.

Step 6 — Speaker

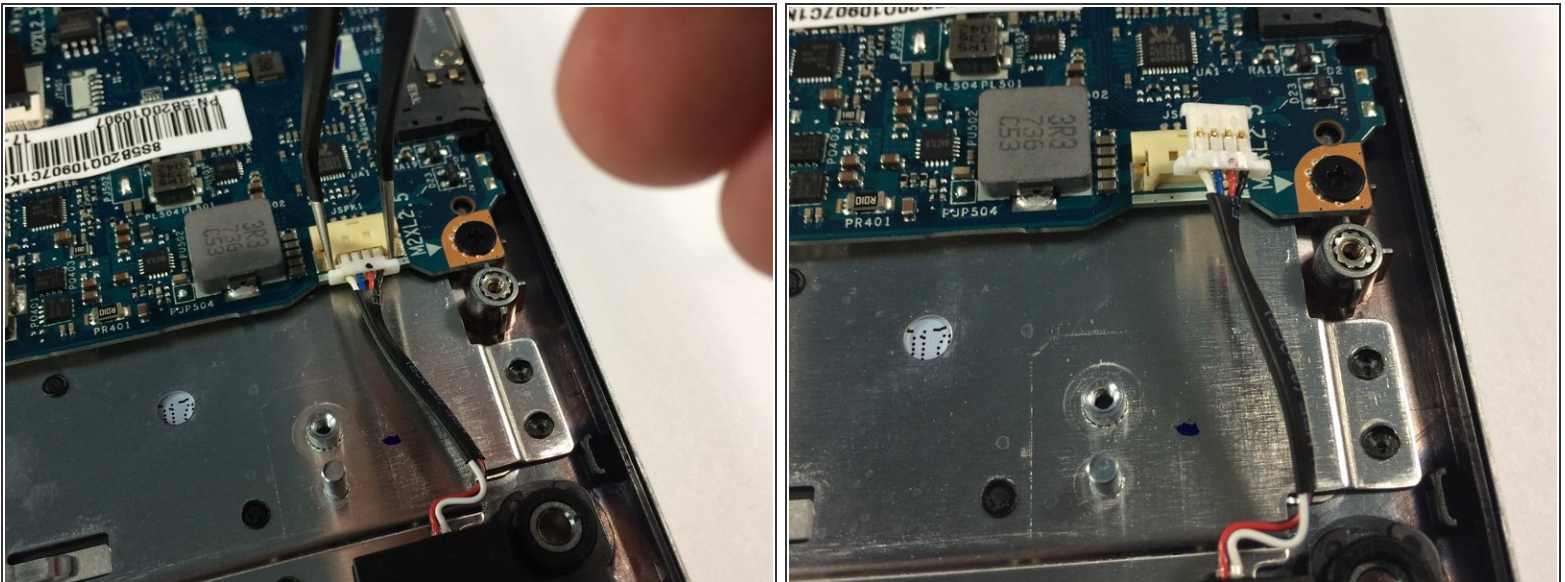

- Disconnect the speakers.

Step 7

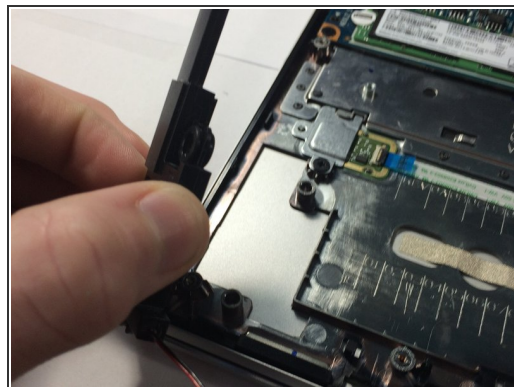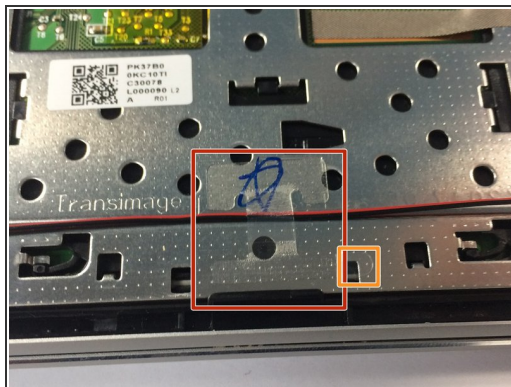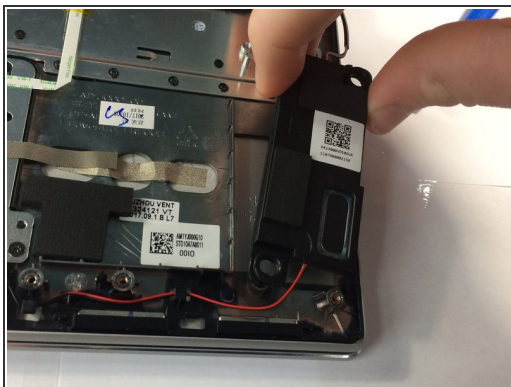

- Remove the left speaker.
- Remove the Adhesive.
 - Use this pull tab to remove it.
- Remove the right speaker,

To reassemble your device, follow these instructions in reverse order.