



# How to Fix Cracked Door Jamb

This guide will help homeowners repair cracks in the door frame on their own and at a very low cost, without having to replace the entire door frame.

Written By: Anisha Karaumbiah



## INTRODUCTION

A cracked door frame can often deteriorate in time but can be salvaged when fixed with a repair kit. This guide will help homeowners repair cracks in the door frame on their own and at a very low cost, without having to replace the entire door frame.



### TOOLS:

- [Large Clamp](#) (1)
  - [Precision Drill Bits](#) (1)
  - [Cordless Drill](#) (1)
  - [Wood Filler](#) (1)
  - [Paint](#) (1)
  - [Paintbrush](#) (1)
  - [150 Grit Sandpaper](#) (1)
  - [Chisel Scraper](#) (1)
-

## Step 1 — How to Fix Cracked Door Jamb



- Cracked door jamb/frame caused by excessive force on door.

## Step 2



- Apply wood filler into the cracks of the door frame.



### Step 3



- Attach the clamp onto the cracked door frame.
- ⓘ Use a clamp with rubber edges for a sturdier grip and also to prevent damaging the door frame.

### Step 4



- Drill a pilot hole into the door frame.
- Screw a 4-inch screw into the frame through the pilot hole.

## Step 5



- Wait for the wood filler to dry.
- Once dried, scrape off the excess filler with a scraper.

## Step 6




- Sand the filled up cracks to get a smooth surface.

## Step 7



- Paint and do not touch until dry.

## Step 8

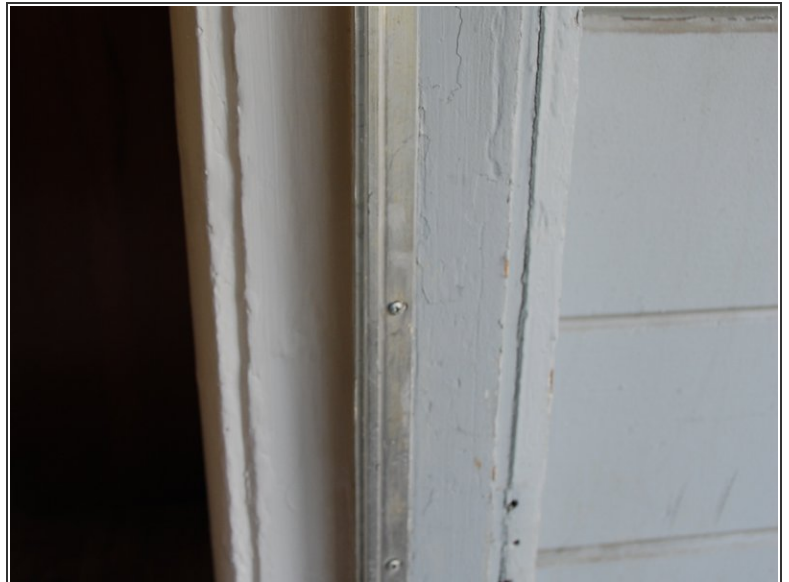

- Repaired door frame/ door jamb.