




HTC Rezound Vibration Monitor Replacement

A replacement guide for the vibration monitor in the HTC Rezound Android Phone.

Written By: Robin White

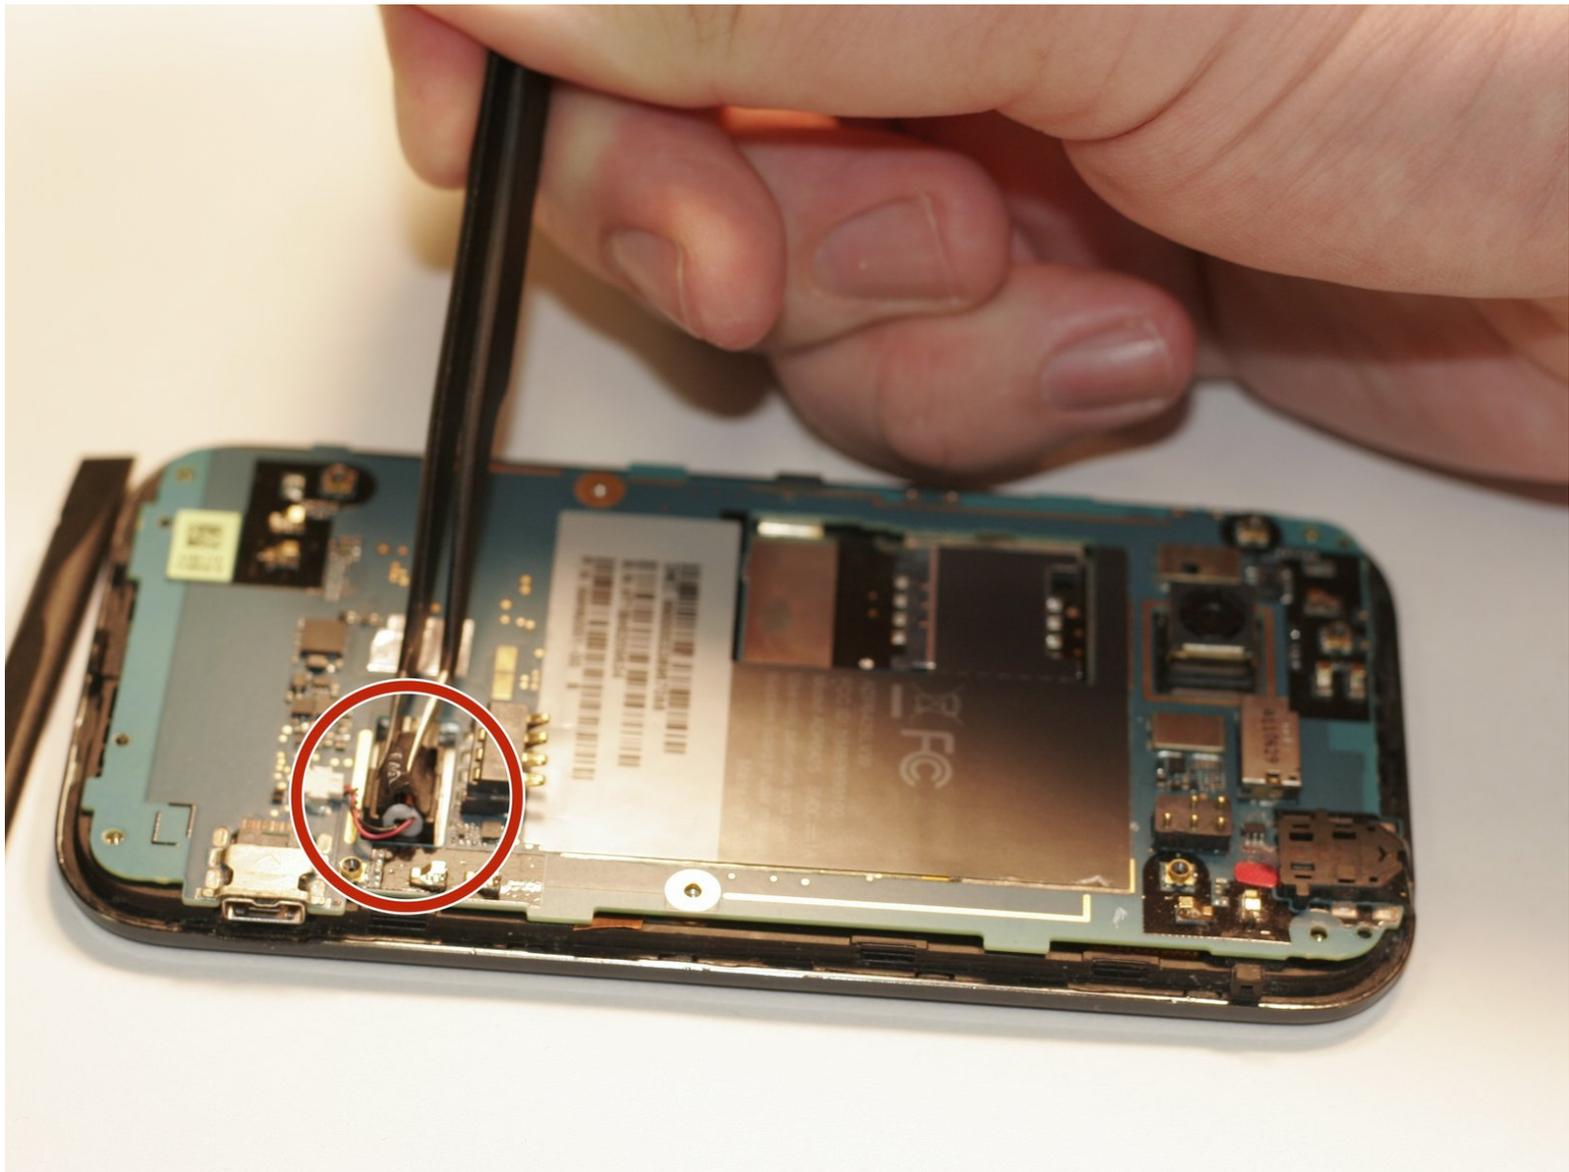

INTRODUCTION

Hello! This should be followed if your phone is having issues with the vibration function. Please be sure to follow the steps in the screen replacement guide up to the indicated point! Have fun fixing your tech!

TOOLS:


- [iFixit Opening Tools](#) (1)
 - [T4 Torx Screwdriver](#) (1)
 - [Spudger](#) (1)
 - [Tweezers](#) (1)
-

Step 1 — Battery



- Use a plastic opening tool or your fingers to get into the groove between the cover and case. Remove the back covering so that the red battery is visible.

Step 2

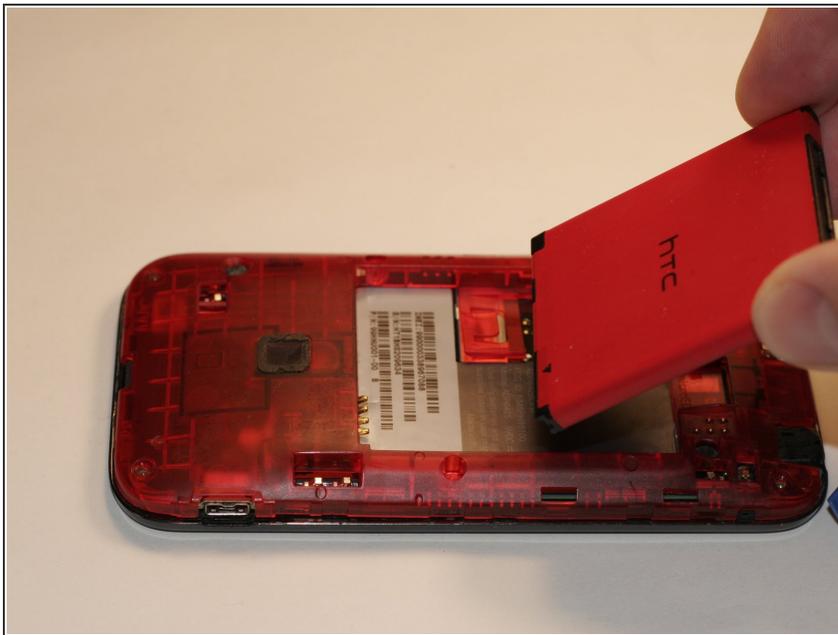


- Remove the red battery to replace.

Step 3 — Vibration Monitor




- Using a Torx T4 screwdriver, remove the six screws from the six spots shown in the photo.
- Use a spudger to pry the casing from the phone.

Step 4

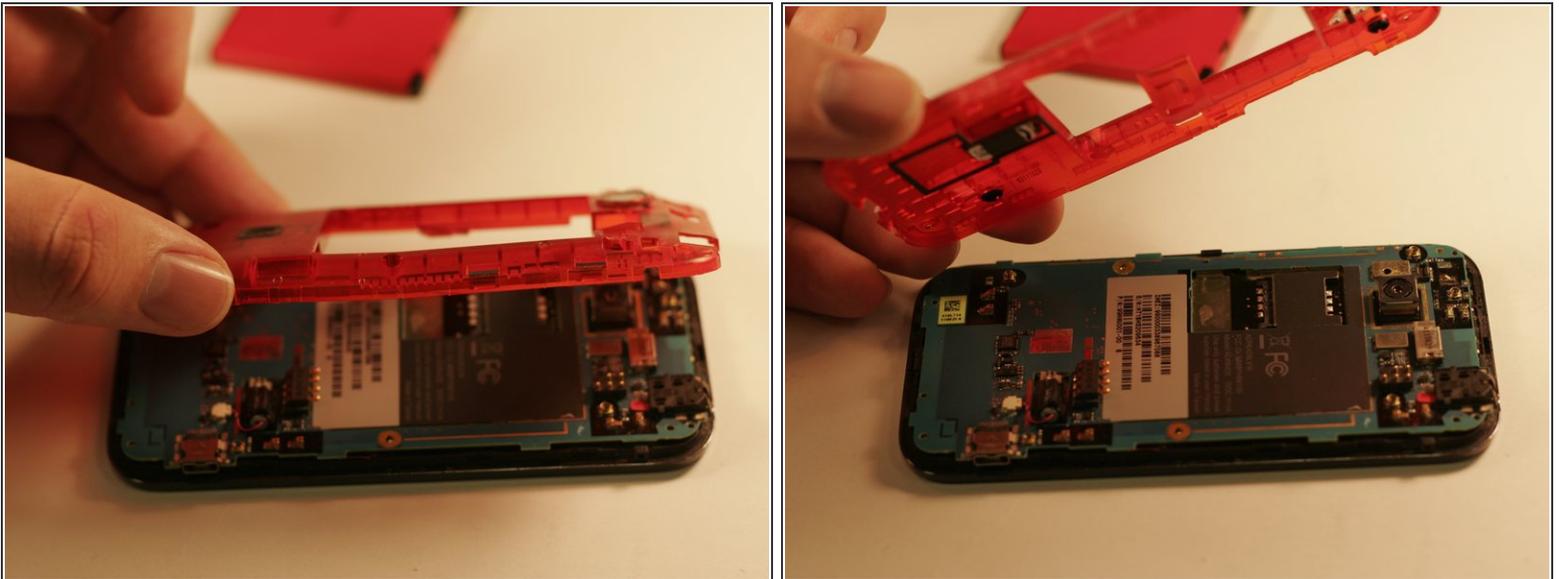


- Gently remove casing from phone.

Step 5

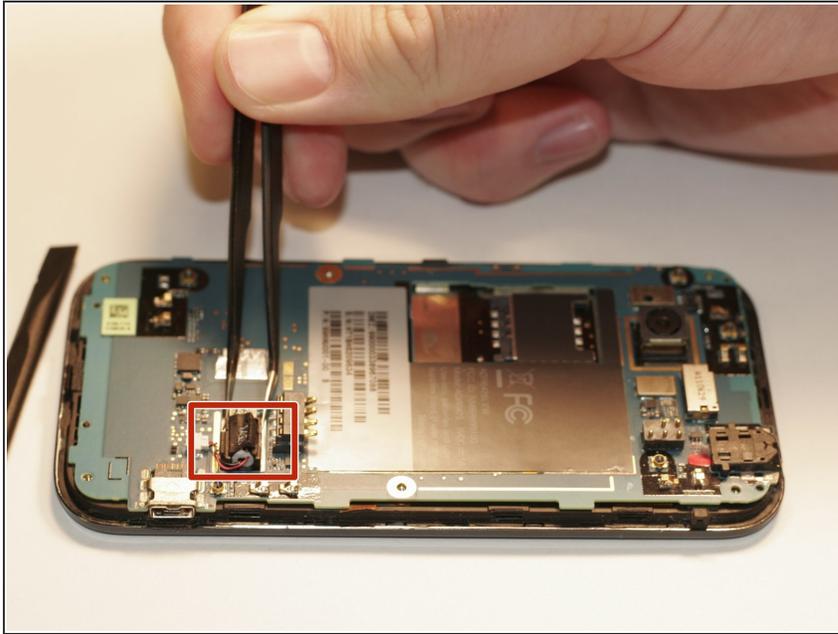

- Shown here is the vibration Monitor, this is what you will be replacing.

Step 6

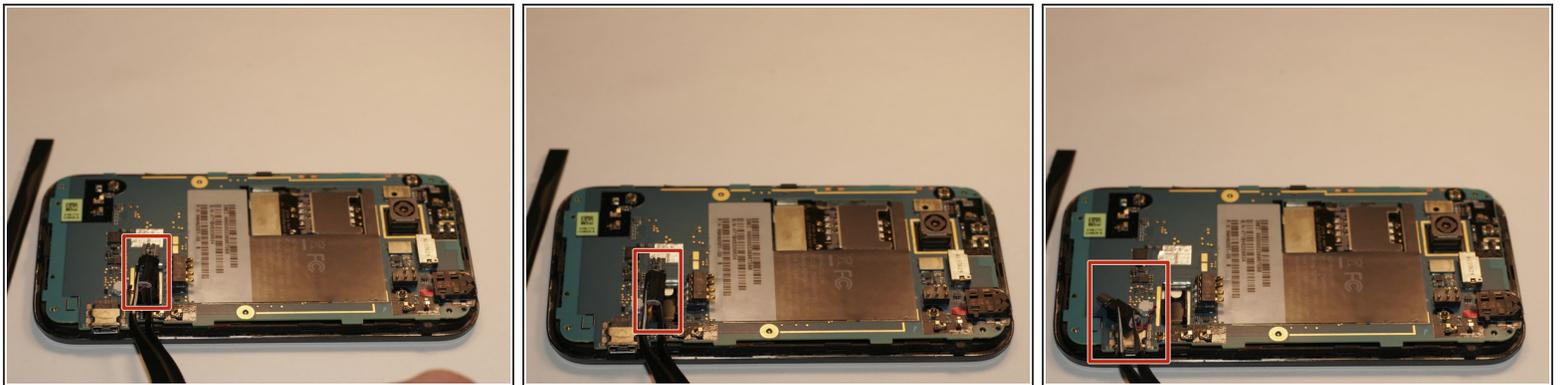


- Remove the body of the monitor from the case attaching it to the motherboard.
- Make sure to remove any potential obstruction that could be blocking the weight at the end!

Step 7



- Carefully disconnect the cable attached at the motherboard.

Step 8

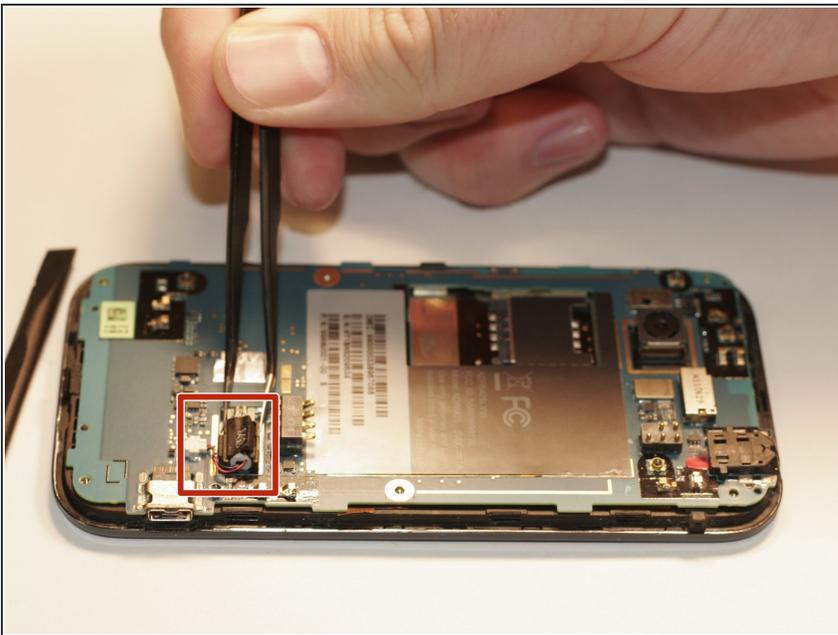

- Insert the replacement's cable into the same spot on the logic board! Then just set it back into the slot on the logic board and you are done!

To reassemble your device, follow these instructions in reverse order.