



# Alcatel Jitterbug Smart Camera Replacement

Use this guide to replace the logic board in...

Written By: Gavin Le



# INTRODUCTION

Use this guide to replace the logic board in your Alcatel Jitterbug Smart

## TOOLS:

JIS #000 Screwdriver (1)

Tweezers (1)

Metal Spudger (1)

## Step 1 — Rear Camera



- Pry back cover open with a metal spudger, or your fingernail, in the divot at the bottom left corner of the phone.
- Lift open case by the corner nearest the divot and remove it from the phone.

## Step 2





- Remove the 13 1 mm Phillips screws with JIS #000 Screwdriver.

## Step 3



- Gently pry off the Mid frame from the phone using a Metal Spudger.

## Step 4

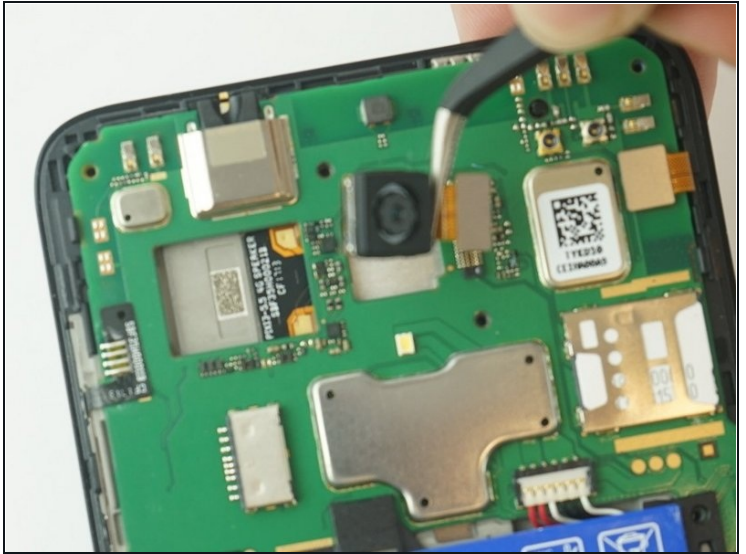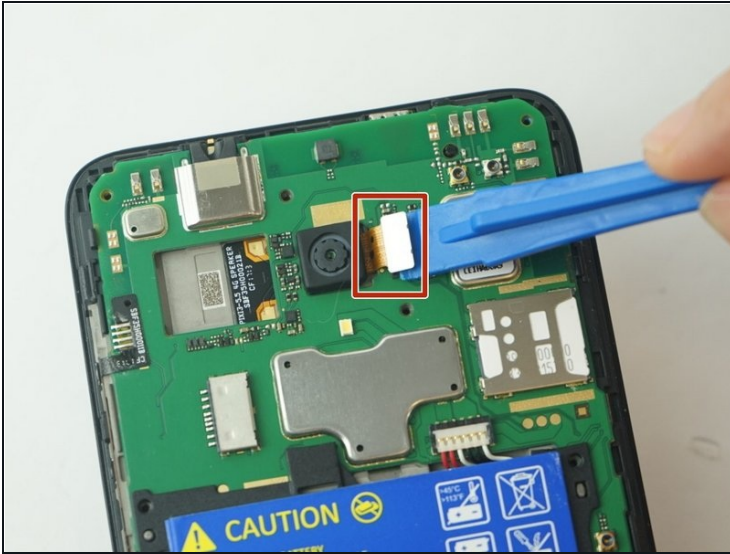

- Use the Plastic Opening tools to gently dislodge the broken camera from the inside of the phone.
- Use a [tweezers](#) to pull the camera connector from its port.

⚠ Be careful not to tear the camera from its connection.

To reassemble your device, follow these instructions in reverse order.