



HTC Hero Motherboard Replacement

This guide will illustrate the appropriate steps necessary to remove a damaged mother board and replace it with a functioning unit.

Written By: Rosalind Villalvazo





TOOLS:

- [iFixit Opening Tools](#) (1)
- [Flathead 3/32" or 2.5 mm Screwdriver](#) (1)
- [T6 Torx Screwdriver](#) (1)

Step 1 — Back Case



- Remove the back of the phone by pushing firmly with your thumbs up towards the camera.
- Remove both the battery and the SD card (Press SD card in to release)
- Locate and remove the four Torx screws highlighted in the photo, with the phone laying face down on your work space.

Step 2



- **Carefully** pry the inside back cover from the device using an appropriate size plastic opening tool or small flathead screwdriver.
- Insert the flat end between the back and front enclosure, working your way around the rim.

Step 3



- **Gently** depress and release the small plastic tabs around the rim in the front enclosure, highlighted here.

❗ It is best to start with the tab found on the top center of the phone, as it is easiest to locate.


Step 4



- **Carefully** separate the front and back enclosures once all of the clips have been disengaged.

⚠ Be sure to not separate too quickly or you risk breaking an attached tab.

Step 5 — Motherboard

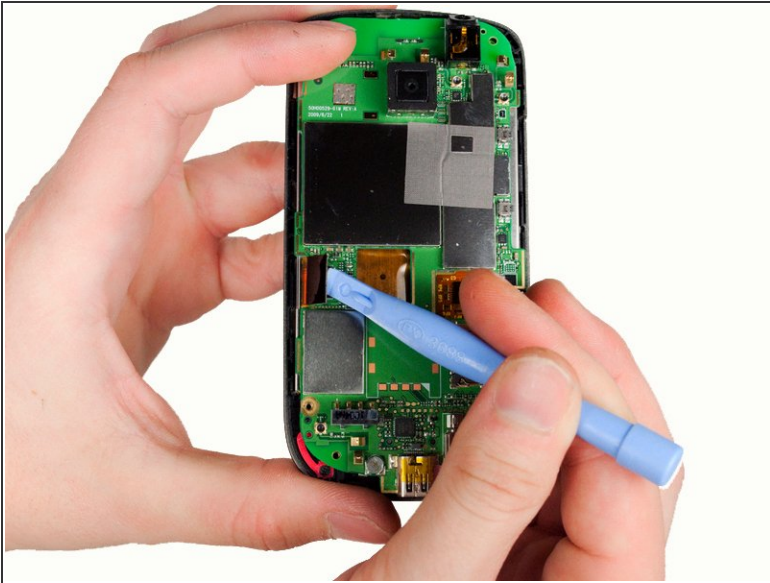


- Release the two ribbon cables using a plastic opening tool.
- **Gently pry up** the pop connectors used to attach the ribbon cables to the motherboard.

Step 6



- Remove the two screws located at the bottom left and right of the motherboard using a small Phillips screwdriver.

Step 7

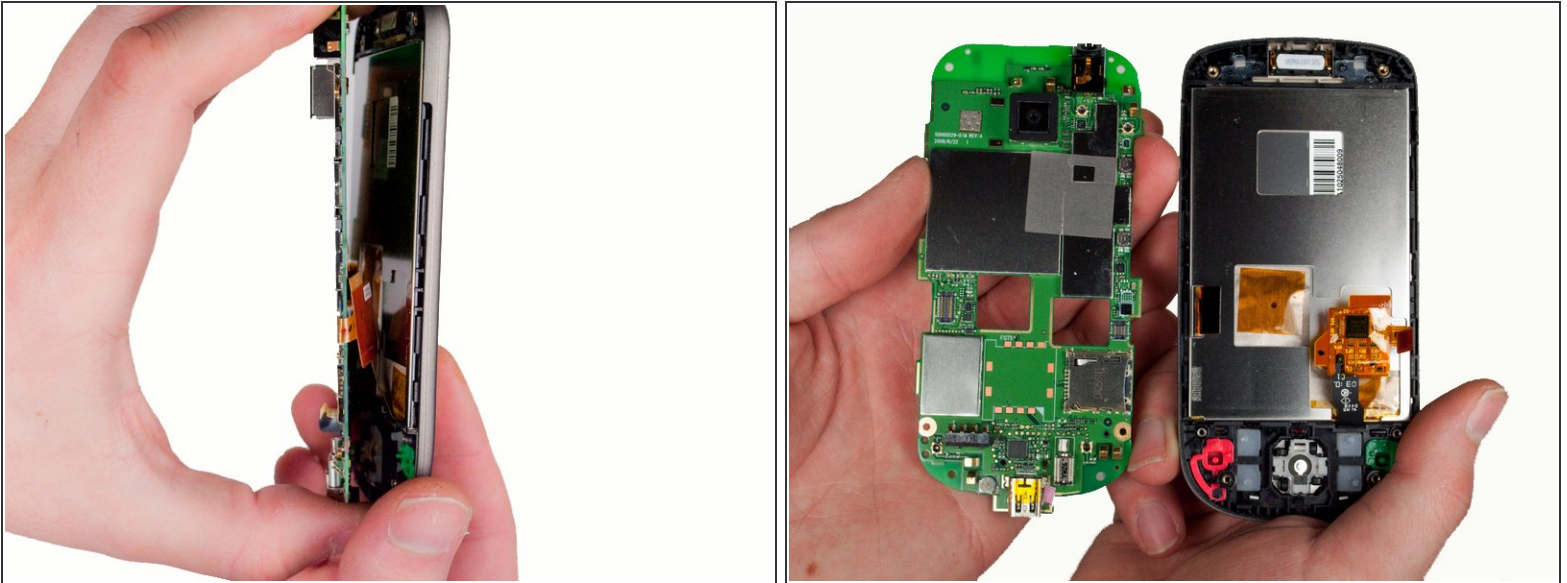

- **Gently lift** the motherboard out of the front enclosure once the screws are removed.

To reassemble your device, follow these instructions in reverse order.