



HP Stream 13-c002dx Keyboard Replacement

Whether you want to replace a faulty keyboard,...

Written By: Matthew Dodge



INTRODUCTION

Whether you want to replace a faulty keyboard, or you simply seek to change the look of your notebook, this easy-to-follow guide will instruct you on gaining internal access to the HP Stream 13-c002dx in only two steps.

TOOLS:



Phillips #0 Screwdriver (1)

6-in-1 Screwdriver (1)


Metal Spudger (1)

Step 1 — Keyboard



-  Begin by placing your laptop on a clean surface such as a table and away from any liquids which may spill and damage components.
- Flip the laptop over so the bottom is facing up.
- Use your Phillips #0 screwdriver to remove the eleven visible 5 mm screws on the back of the laptop.
 -  There are some screws underneath the rubber feet. Use a spudger to remove them and gain access.
- Unscrew the two remaining 2.5mm screws. Keep these screws separate from the first eleven 5mm screws.

Step 2

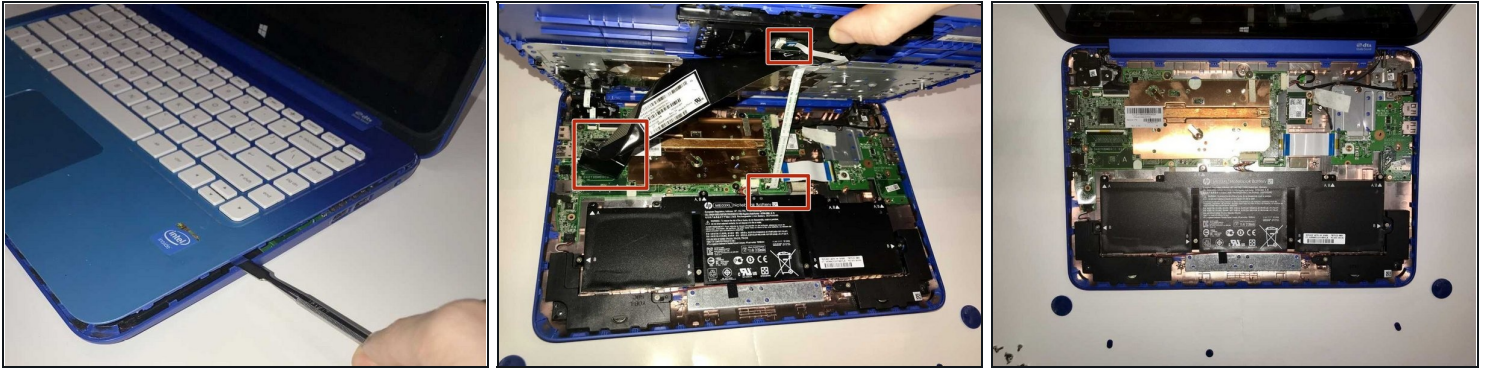

- ① Flip the laptop back over so it's right side up and open the screen.
- Using a spudger, separate the keyboard surface from the bottom of the laptop.
 - While lifting the keyboard surface from the bottom, you will notice three cables still attaching them together. Gently unplug each of these cables from the motherboard.
 - Remove the keyboard assembly.
-

To reassemble your device, follow these instructions in reverse order.