



Dell Vostro 15 3562 KeyBoard Replacement

Written By: Johnathan Hammond






TOOLS:

- [Spudger](#) (1)
-

Step 1 — Battery

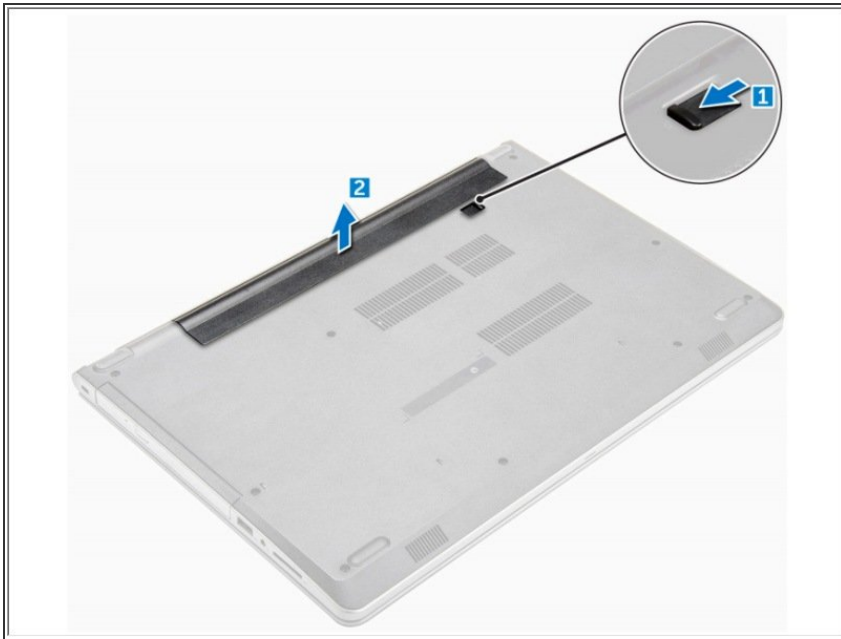

- Slide the release latch to release the battery [1].
- Remove the battery from the computer [2].

Step 2 — KeyBoard



- Using a plastic scribe, release the five tabs from the slots located above the keyboard [1].
- Flip the keyboard on the palm rest to access the keyboard connector cable under the keyboard [2].

Step 3



- Disconnect the keyboard cable from the system board.
- Remove the keyboard from the computer.

To reassemble your device, follow these instructions in reverse order.