




# Dell XPS M1730 Webcam Replacement

Use this guide to replace the webcam on the Dell XPS M1730.

Written By: Natalie King

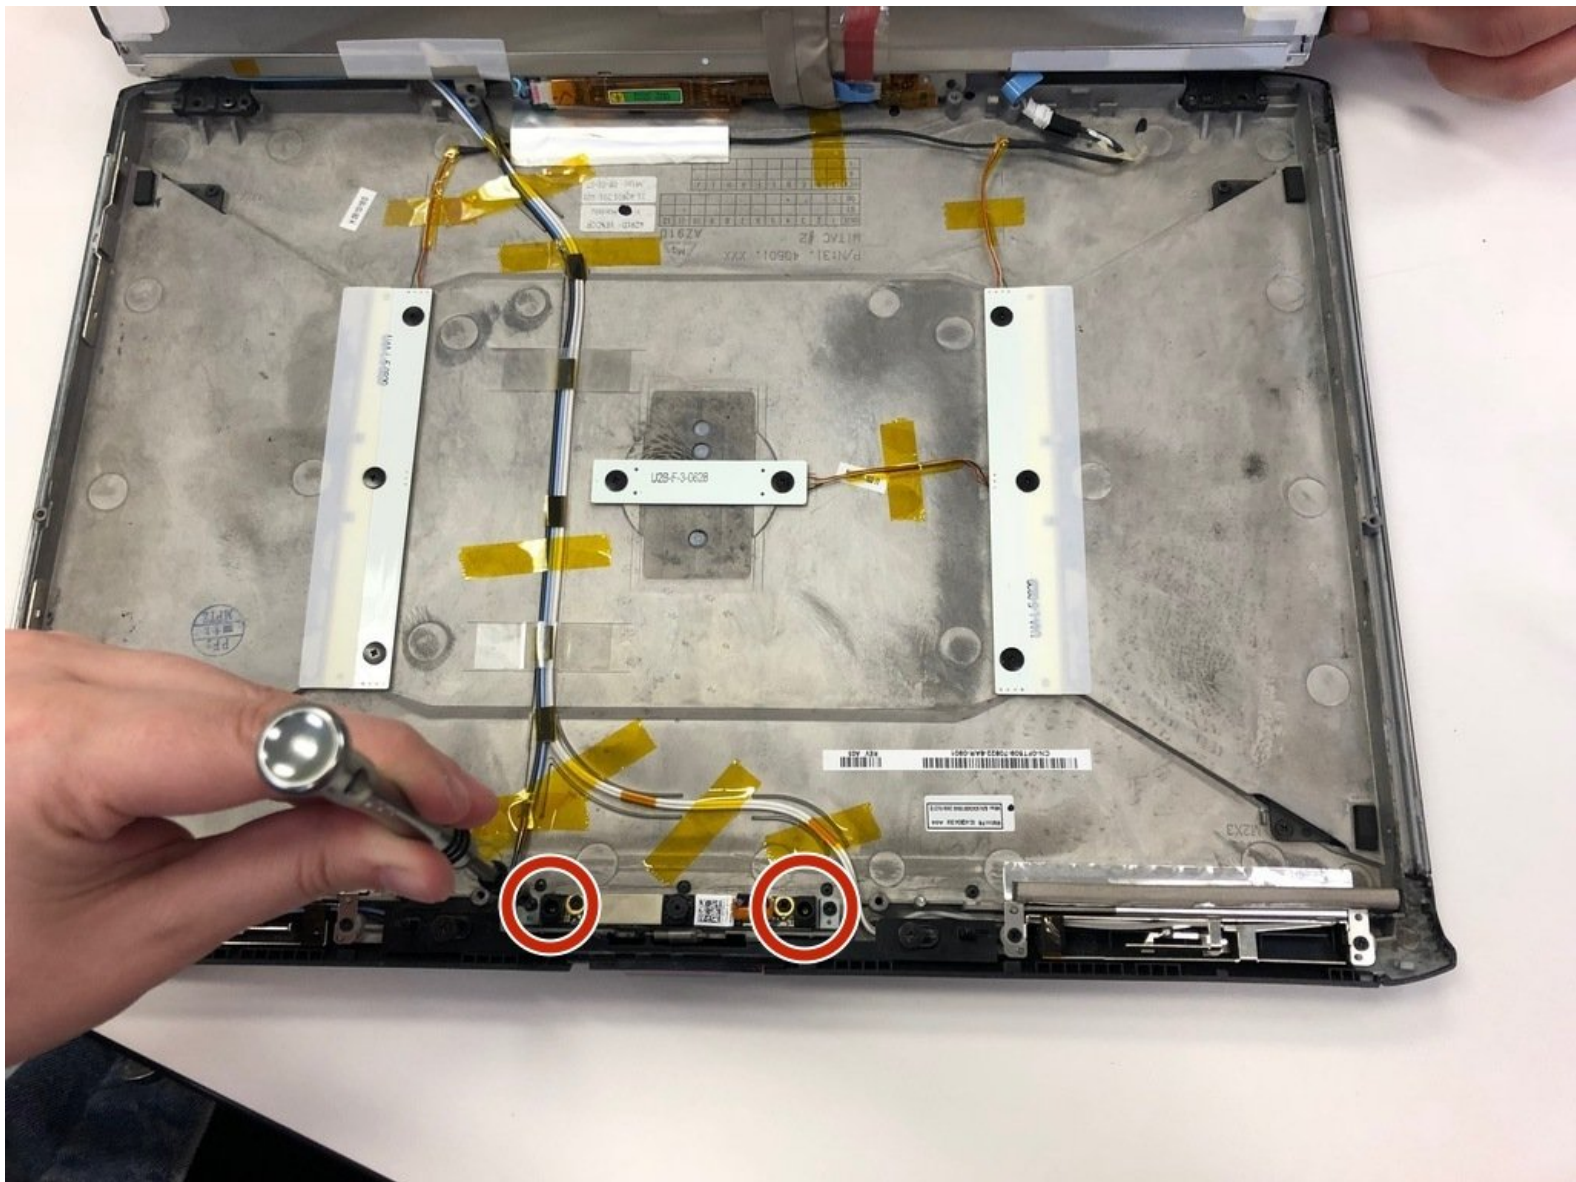



## TOOLS:

- [Phillips #0 Screwdriver](#) (1)
-

## Step 1 — Battery



- Push the sliding button near the battery compartment.

## Step 2



- Slide the button next to the battery and lift up on the lip of the battery edge.





## Step 3





- Lift and remove the battery.

## Step 4 — Keyboard

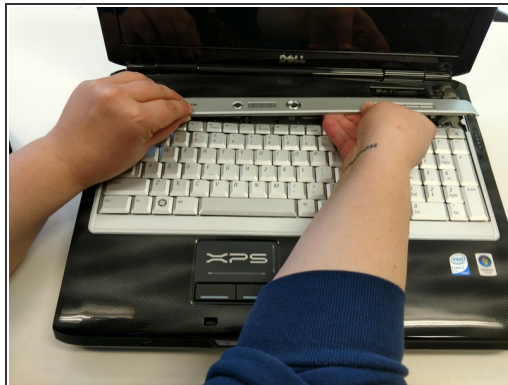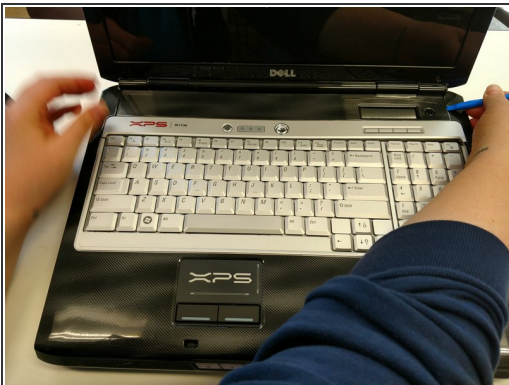



- Remove the plastic trim at the base of the screen. Start from the tab on the right side and work to the left side.

## Step 5

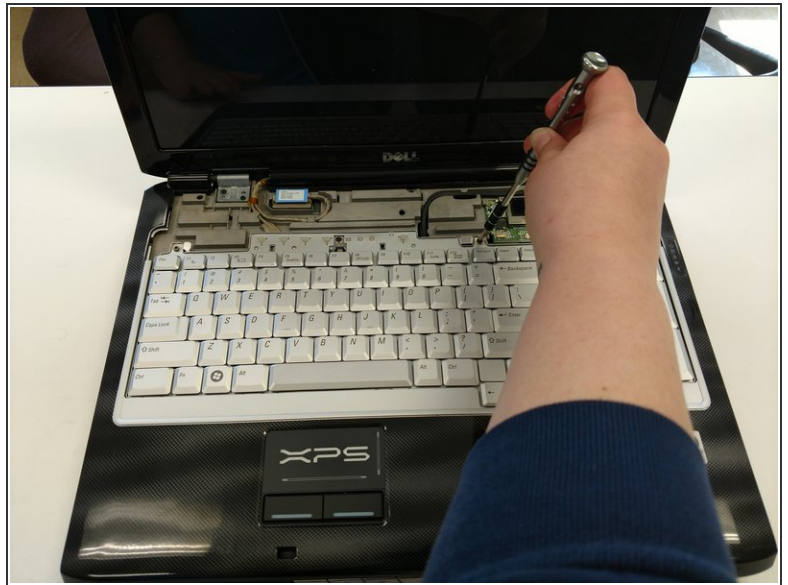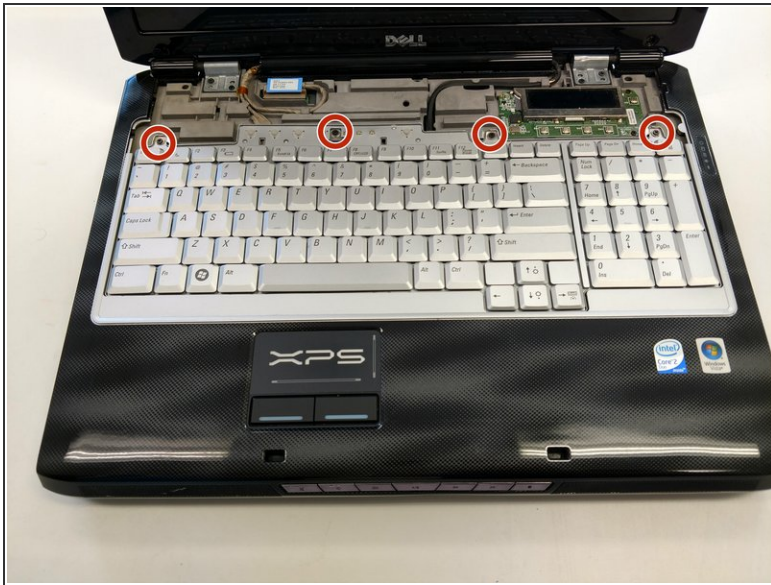

- Remove the four screws from the top of the keyboard bracket.


## Step 6

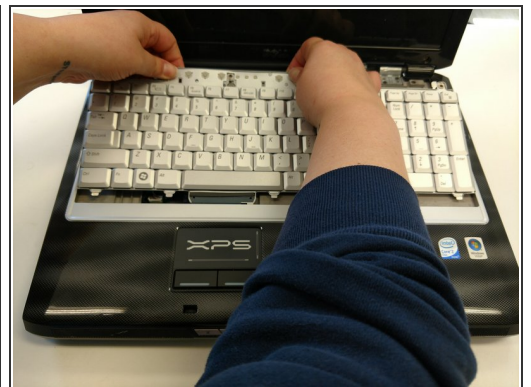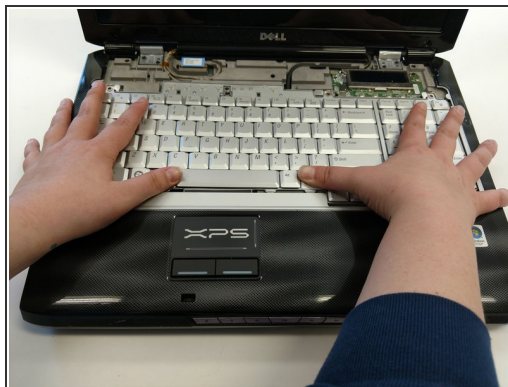

- Remove the keyboard by sliding it forward, off of the clips, and then lifting up.




## Step 7

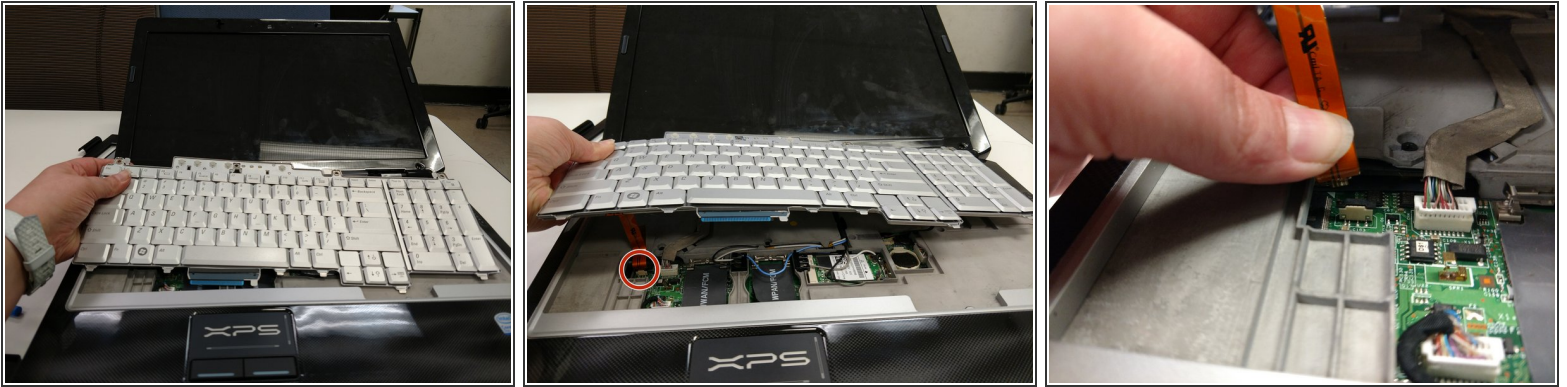


- Lift the keyboard about 2 inches up from the laptop platform.
- From this angle the keyboard ribbon connector can be seen and disconnected.

## Step 8 — LCD Screen Display

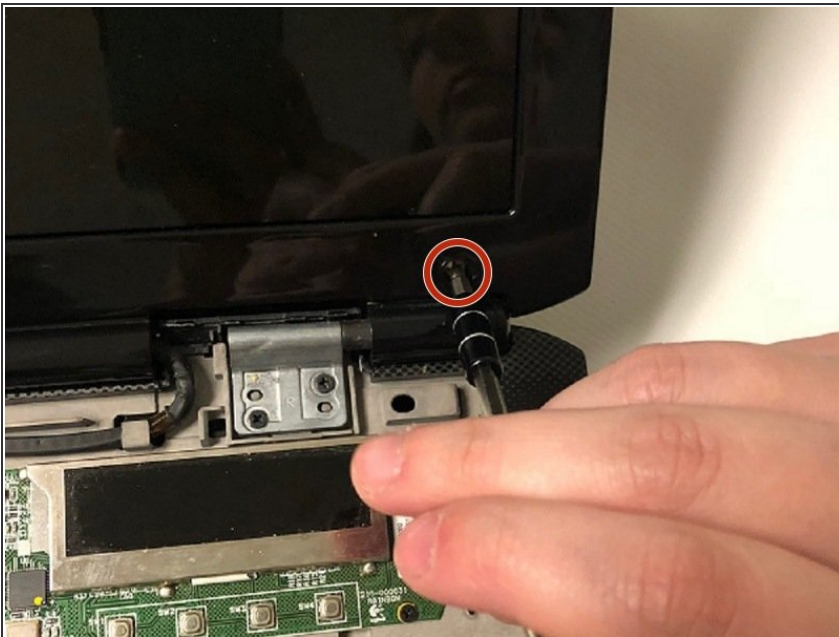


- Remove 2 M2x3mm screws that are located at the bottom of the plastic bezel with a PH0 screwdriver.

## Step 9

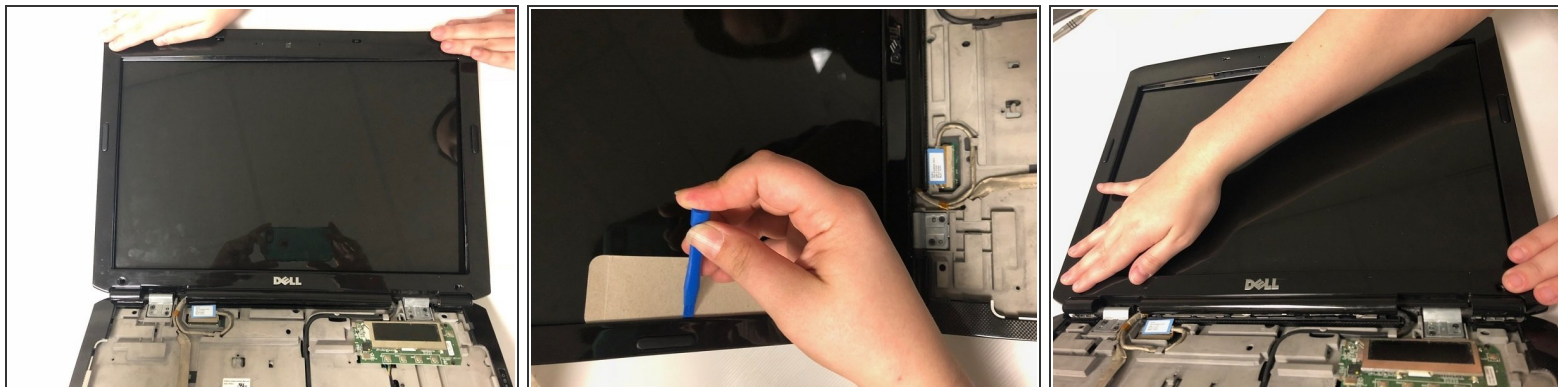

- Use iFixit plastic tool and a cutout of cardboard to pry out the plastic bezel around the edges of the LCD screen


## Step 10

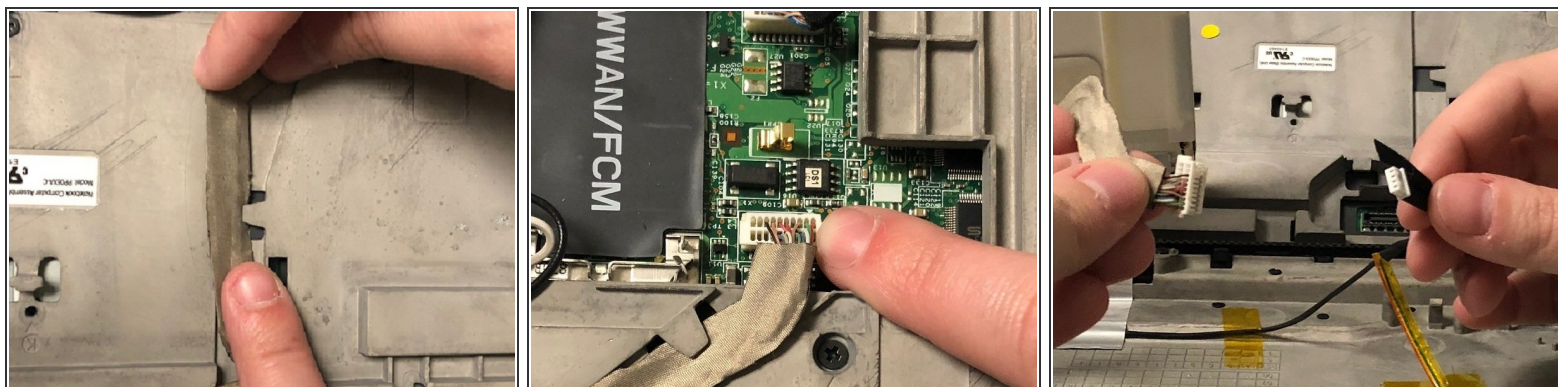

- Disconnect the display connectors by removing them from the grooves and unplugging them.




## Step 11

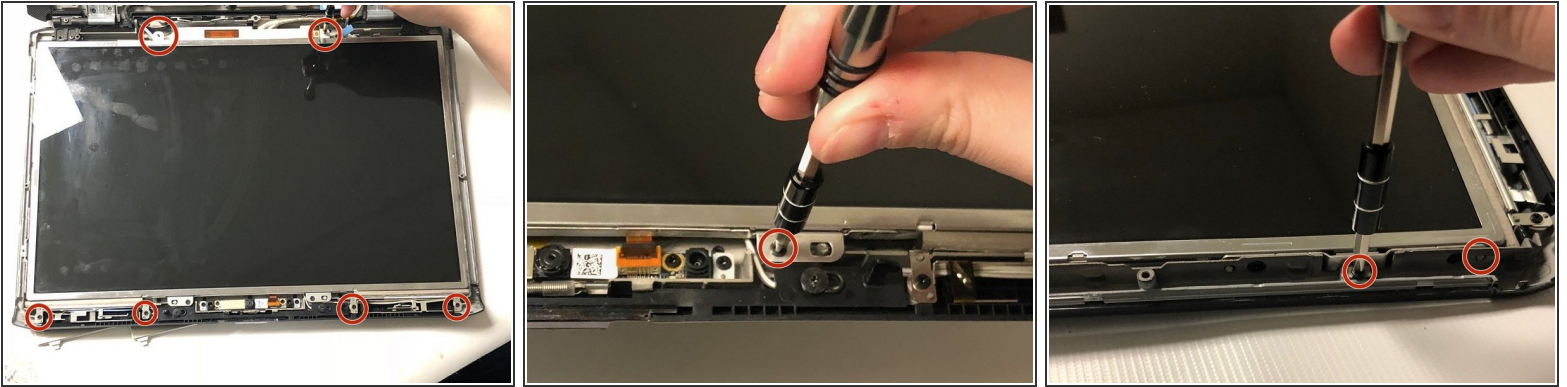

- Remove 12 M2x3mm screws along the edge of the screen frame with a PH0 screwdriver.


## Step 12

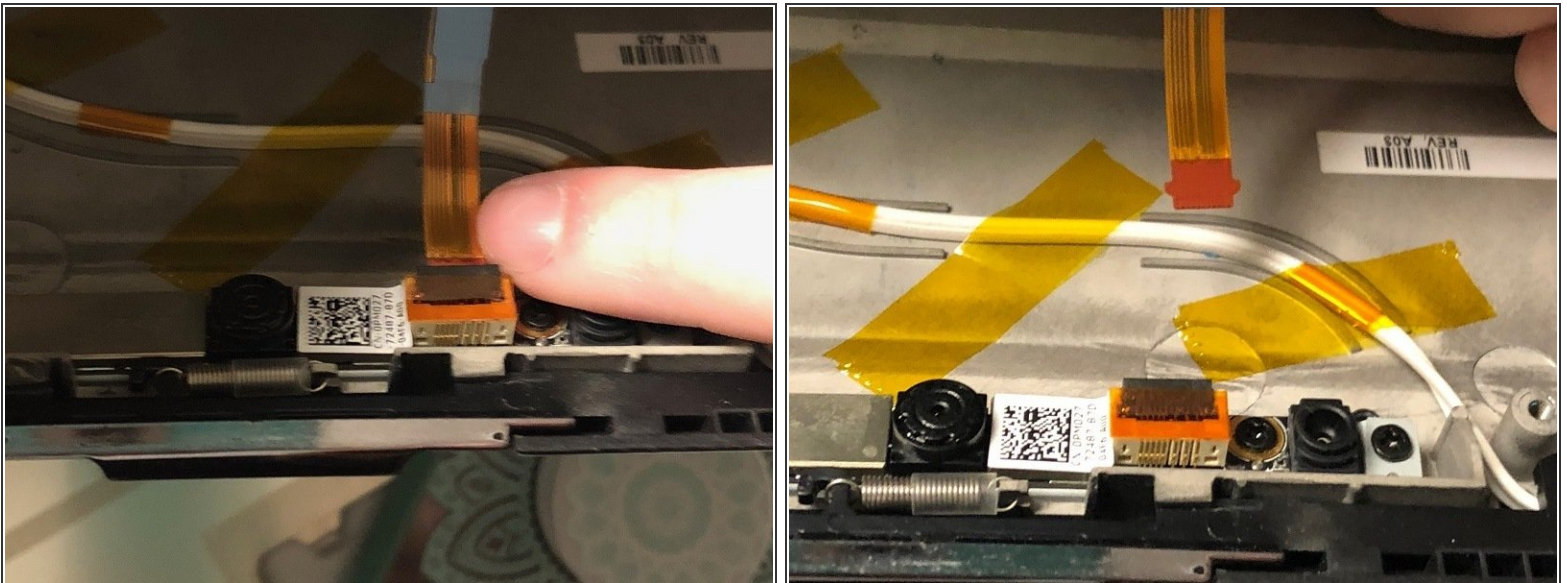

- Disconnect the display connector behind the top of the screen.




## Step 13 — Webcam

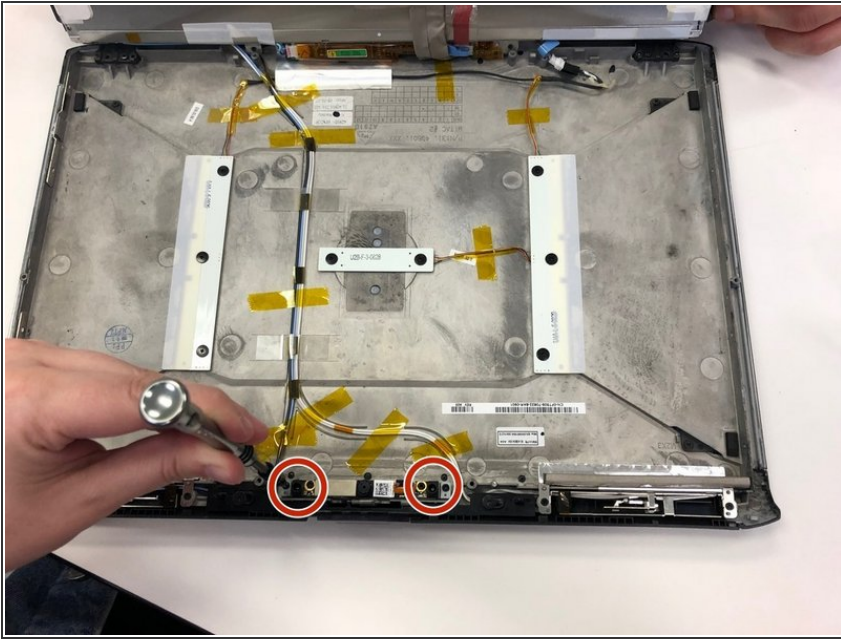


- Remove the four screws (M2x3mm) surrounding the webcam

## Step 14

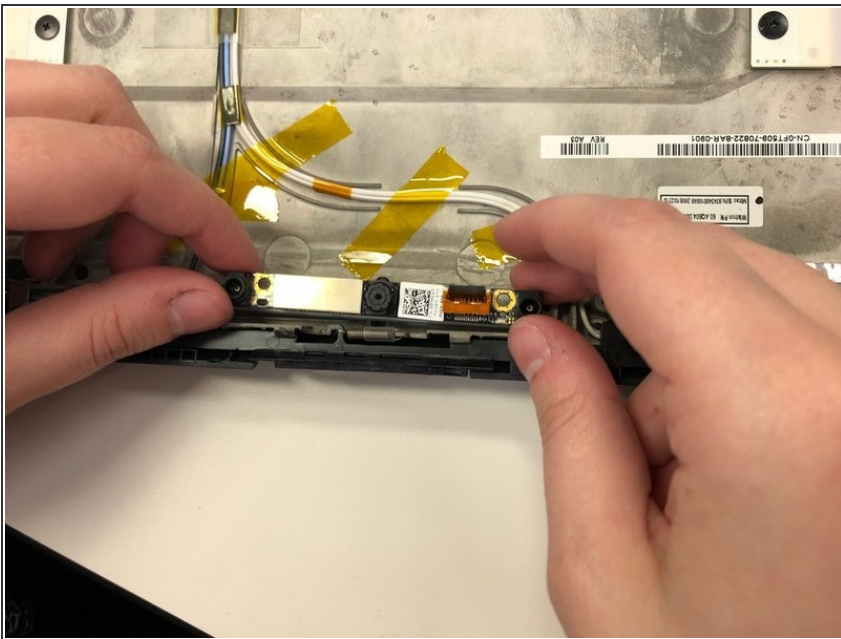

- Lift up on the webcam bar to pull it out.

## Step 15

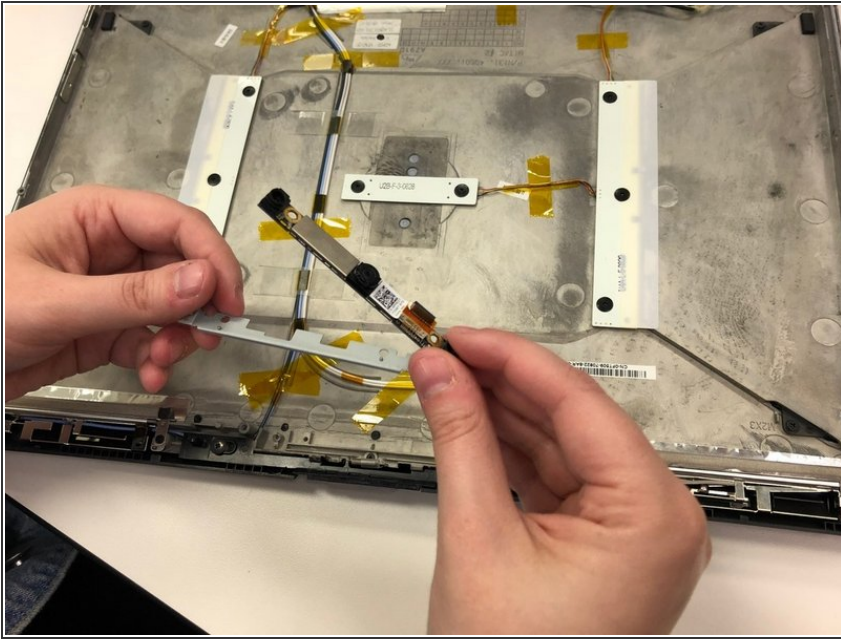

- Remove webcam bar and the metal tray underneath.
- Your webcam is now removed.

To reassemble your device, follow these instructions in reverse order.