




Huawei M750 Charging Port Replacement

Use this guide to get to the charging port and replace it in Huawei M750

Written By: Kshitiz Thapa

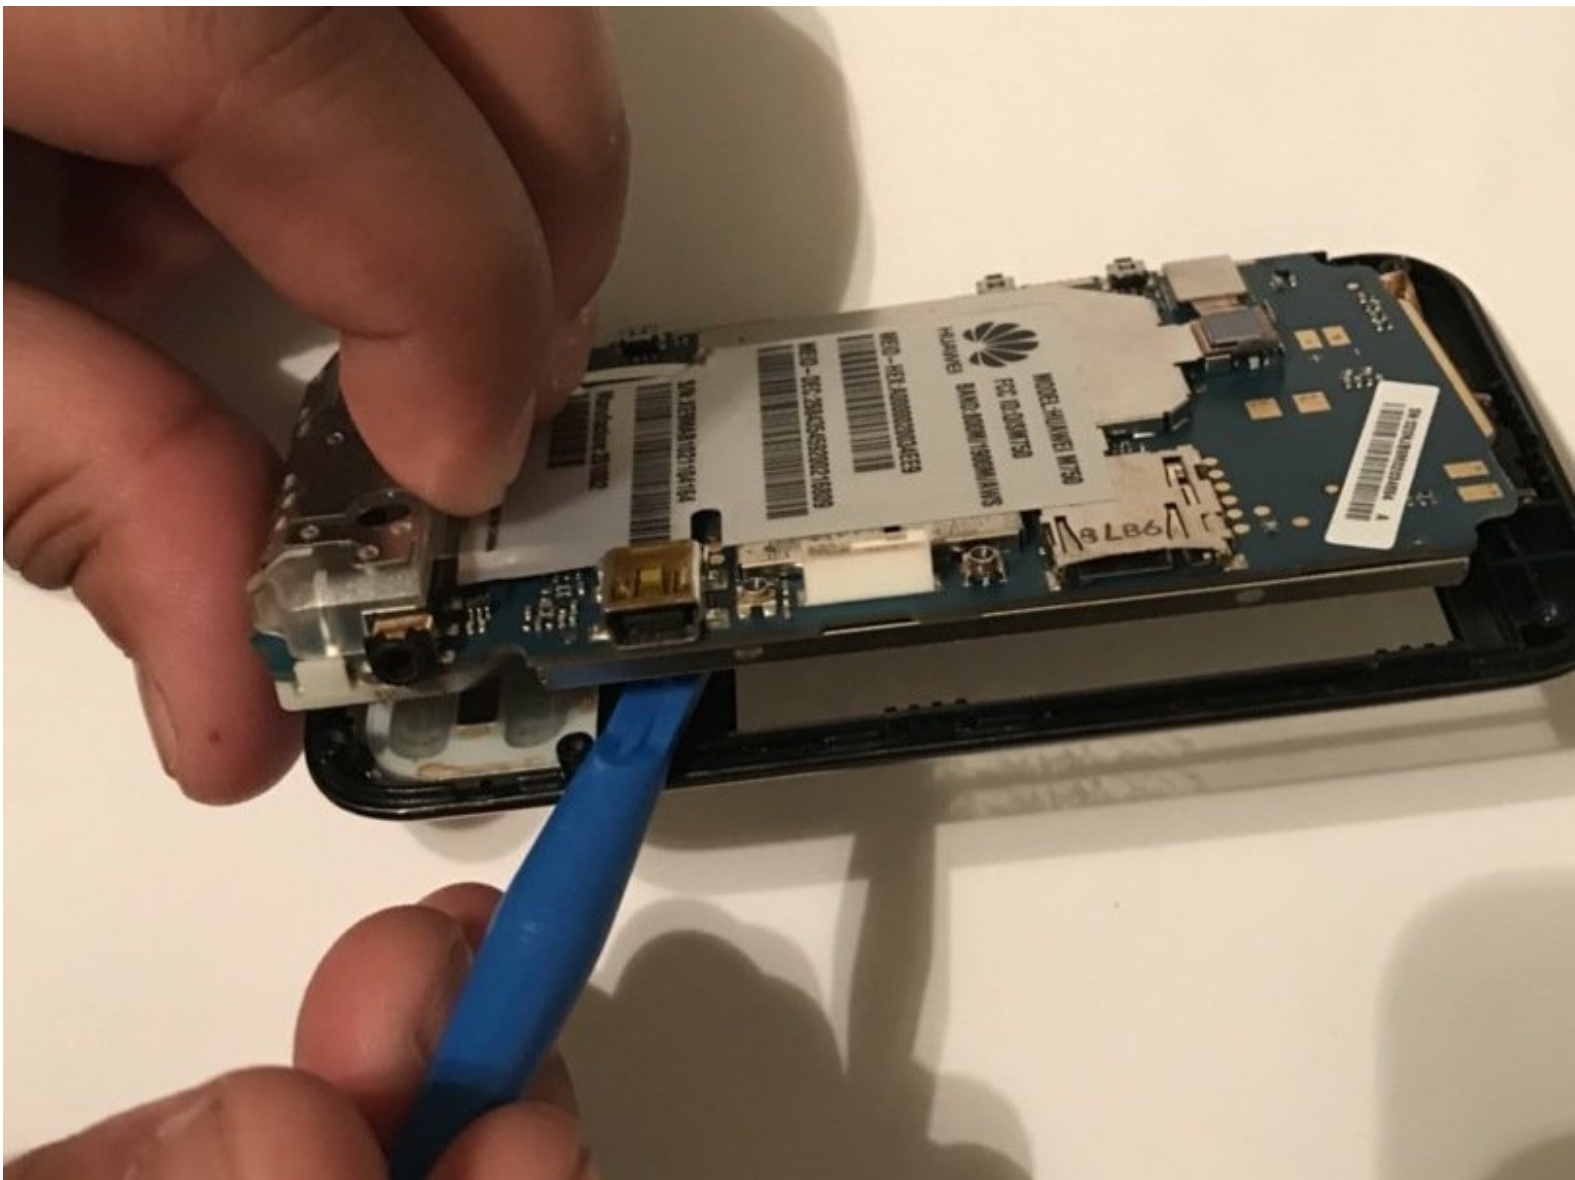

INTRODUCTION

This guide will lead you throughout the process of the replacement of the charging port in Huawei M750



TOOLS:

- [T5 Torx Screwdriver](#) (1)
 - [iFixit Opening Tools](#) (1)
-

Step 1 — Battery



- Depress the top of the battery cover, and pull downwards towards the base of the phone.

Step 2



- Remove the battery by levering the battery out, using the cut just below the camera.

Step 3 — Back Panel




- Use the opening tool to start prying the camera and speaker cover, starting from the battery side.
- Work the opening tool around the border of the camera and speaker cover, until it comes loose.

Step 4





- Using the T5 Torx screwdriver, remove the six 6mm screws.

Step 5

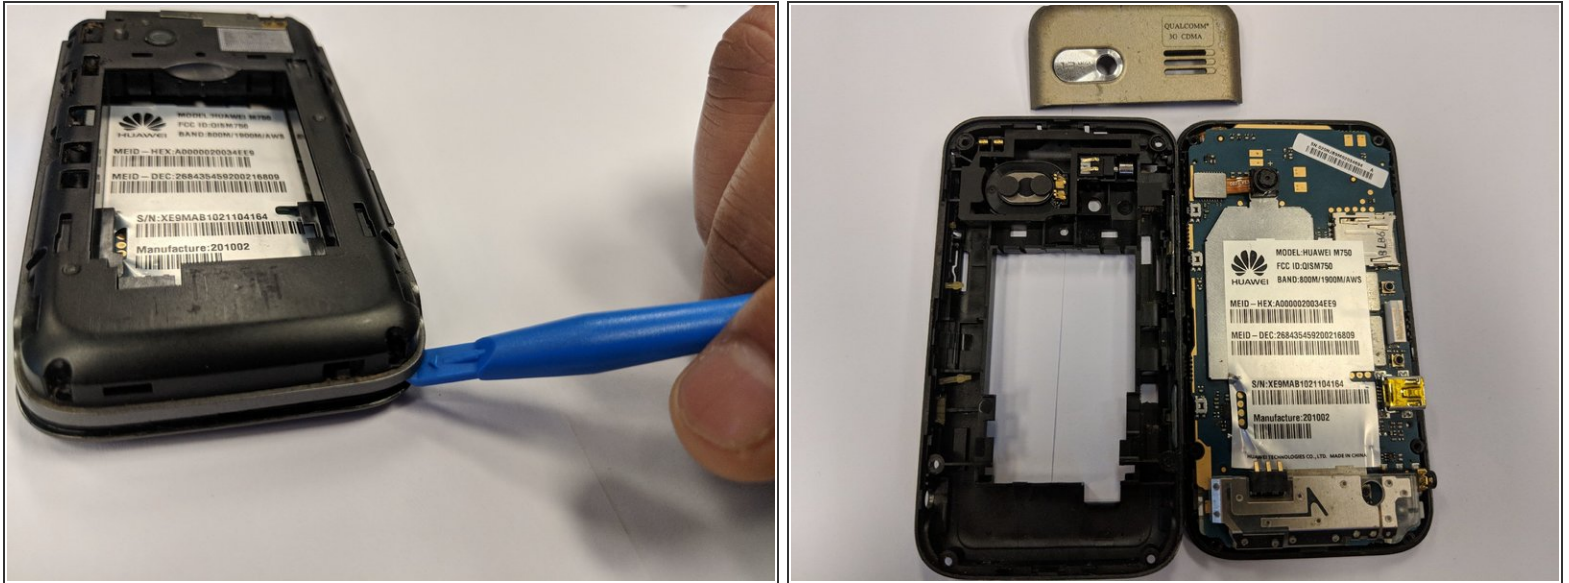



- Using the opening tool, pry the back panel from the front panel.
 - Work your way around the phone until the panels separate evenly.
- i** This step may require a substantial amount of leverage.

Step 6 — Charging Port

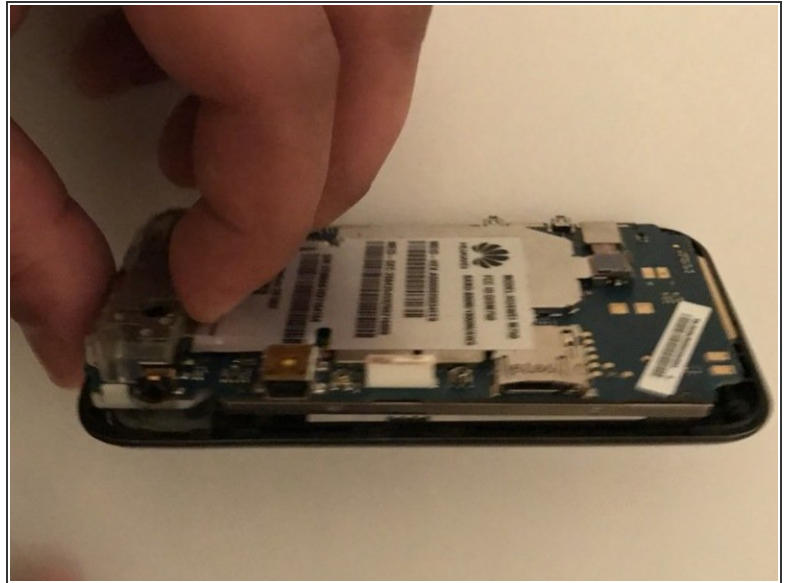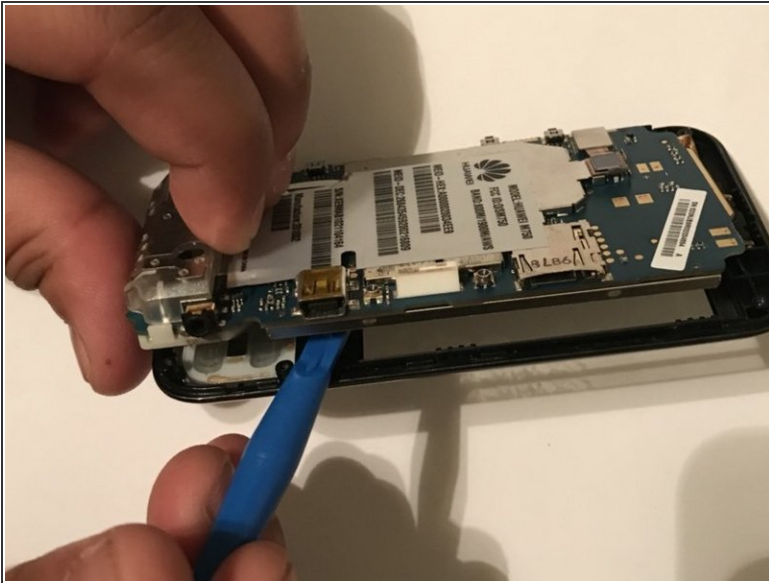

- Using the opening tool, start prying out the motherboard from the front panel along the border.
- When the motherboard seems separated from the front panel, pull it outwards.

Step 7

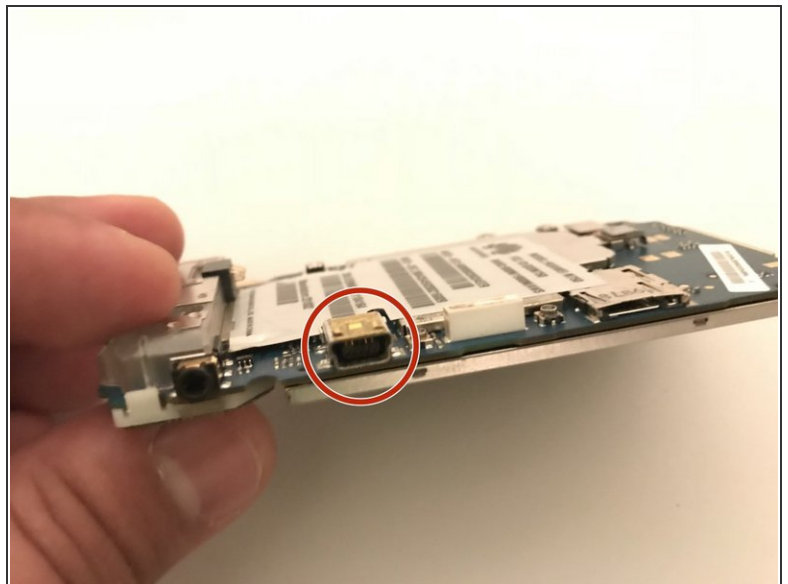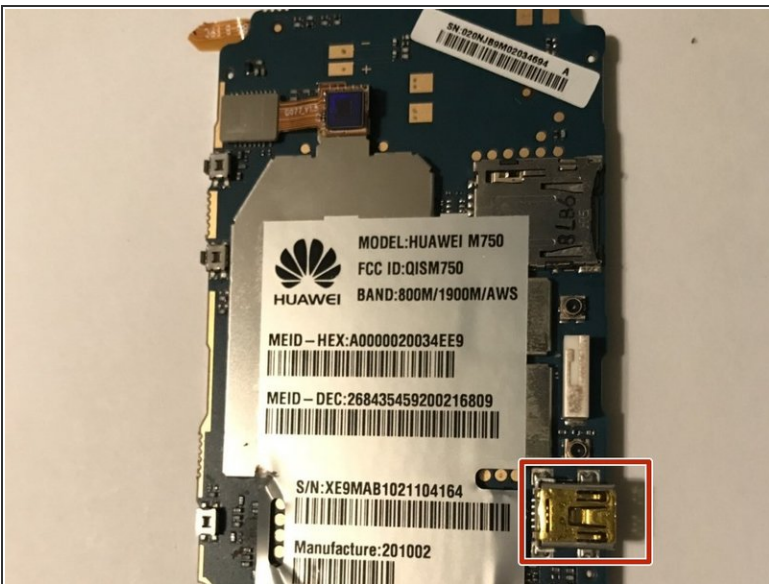

- The charging port is soldered to the motherboard, use [this guide](#) to do the replacement.

To reassemble your device, follow these instructions in reverse order.