



Motorola Moto G3 Prerequisite Guide

We will be removing the back cover and also removing the screen to get to the motherboard, which contains the battery, front camera, and rear camera.

Written By: Irkan Notta



INTRODUCTION

[Click here for an updated version of this guide.](#) The version you are viewing is retained for historical purposes.

In this guide, we will walk through how to remove the front screen of the Motorola Moto G3



TOOLS:

- [iFixit Opening Tools](#) (3)
 - [iFixit iOpener](#) (1)
-

Step 1 — Prerequisite Guide




- Use the plastic opening tool to open the back cover as shown in the photo.

Step 2




- Heat an iOpener in the microwave for 30 seconds.
- Place the heated iOpener on all four edges of the screen for approximately 2 minutes.

Step 3

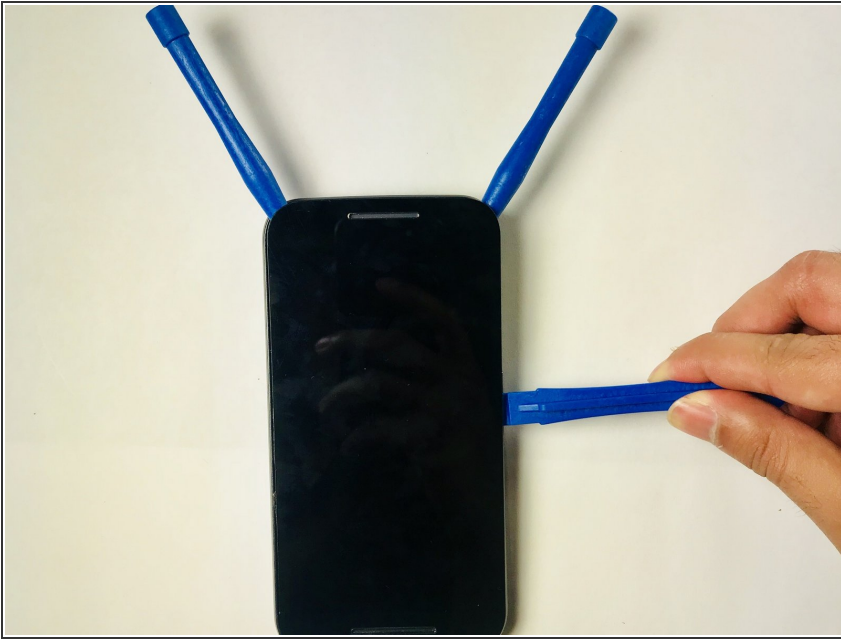

- Apply the plastic opening tool on the edge of the screen near the front camera.
- After creating enough space, allow the opening tool to be inserted on the side of the phone.
- Create another space on the other side of the screen.
- Leave the opening tool inserted.
- Carefully apply the larger plastic opening tool by sliding it through the longer edge of the screen.

Step 4

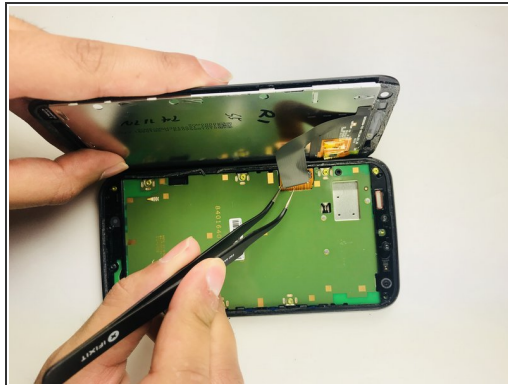

- A strip will be attached to the motherboard as shown.
- Using tweezers, carefully detach the strip from the motherboard.

To reassemble your device, follow these instructions in reverse order.