




HP 15-BA078DX Back Panel Replacement

The guide will detail the replacement of the back panel of the HP 15-BA078DX.

Written By: Benjamin DosSantos Jr

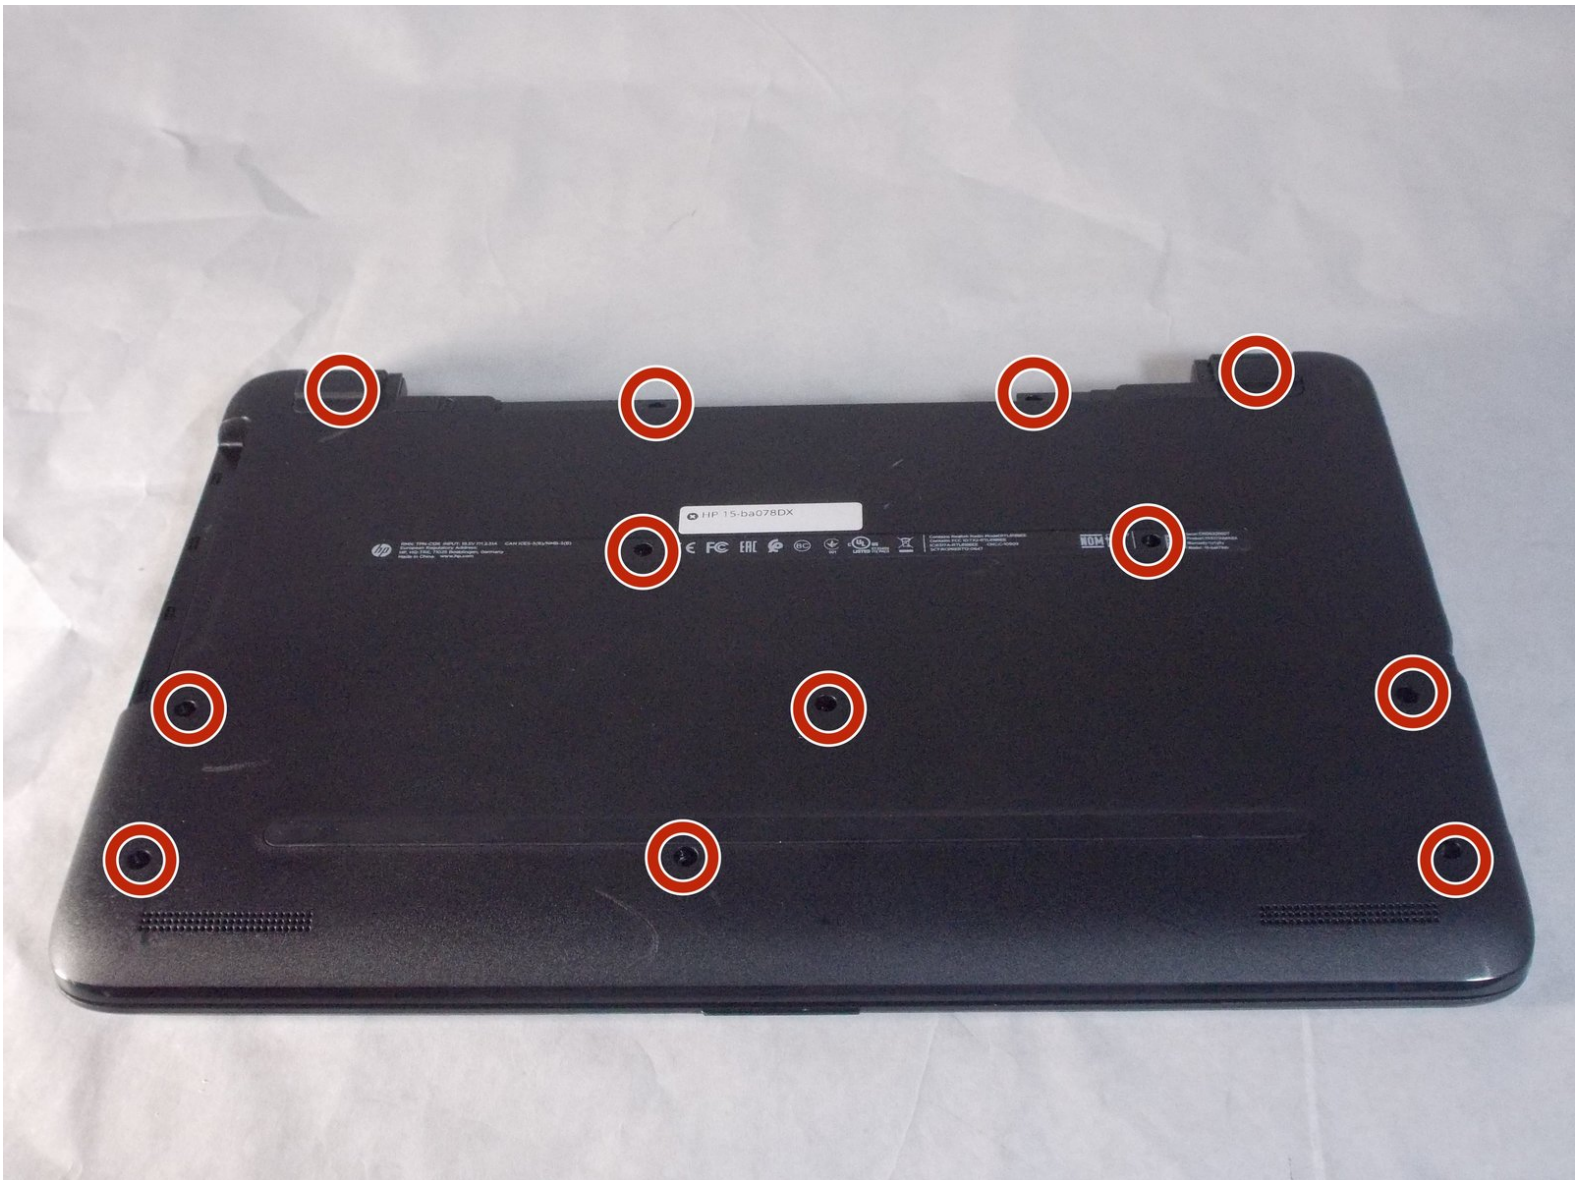

INTRODUCTION

The guide will detail the replacement of the back panel of the HP 15-BA078DX.



TOOLS:


- [Phillips #0 Screwdriver](#) (1)
 - [iFixit Opening Tools](#) (1)
 - [Spudger](#) (1)
-

Step 1 — Battery



- Unclip the two latches on the bottom of the laptop.
- Slide the battery straight out while holding the clip open.

Step 2 — Disc Drive

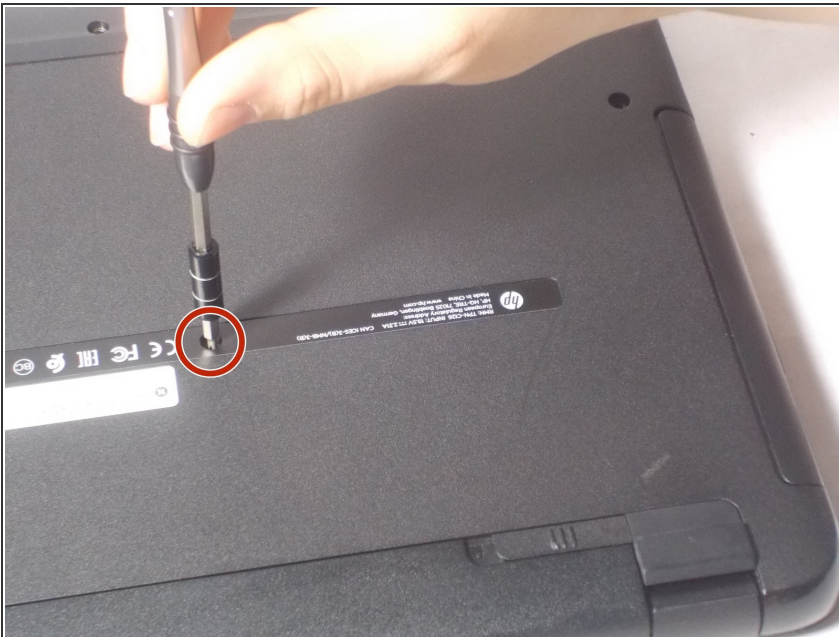


- Using the Phillips #0 screwdriver, remove the 7.5mm screw from the underside of the plastic frame that holds the disc tray in place.

Step 3



- Remove the disk tray assembly by sliding it out from the side using the blue plastic opening tool.

Step 4 — Back Panel

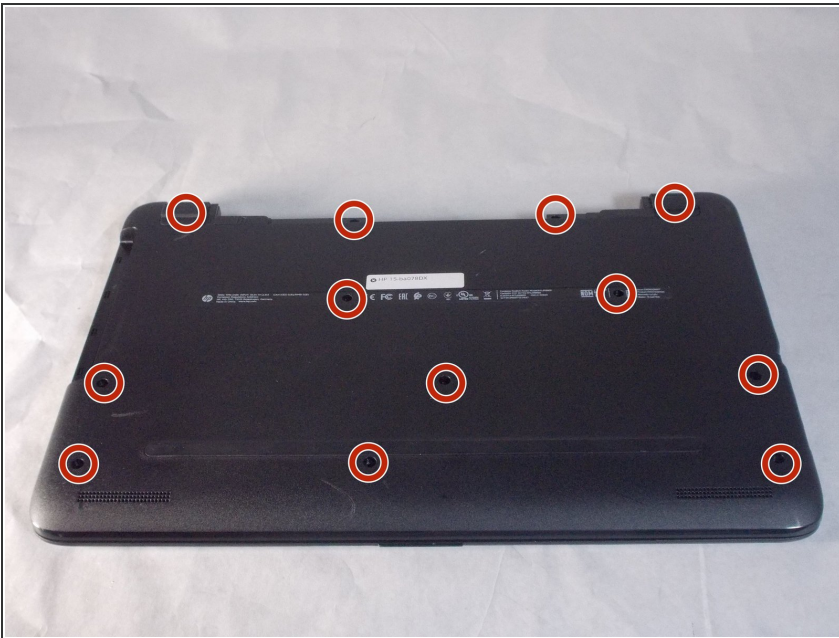

- Remove all of the remaining back panel screws with a #0 Phillips head screwdriver.
- ⓘ Remember to remove the two screws under the rubber feet.


Step 5



- Carefully use the blue plastic opening tool to pry the clam shell of the laptop apart.

i You may need to flip the laptop over to unlatch all of the internal clips.

Step 6

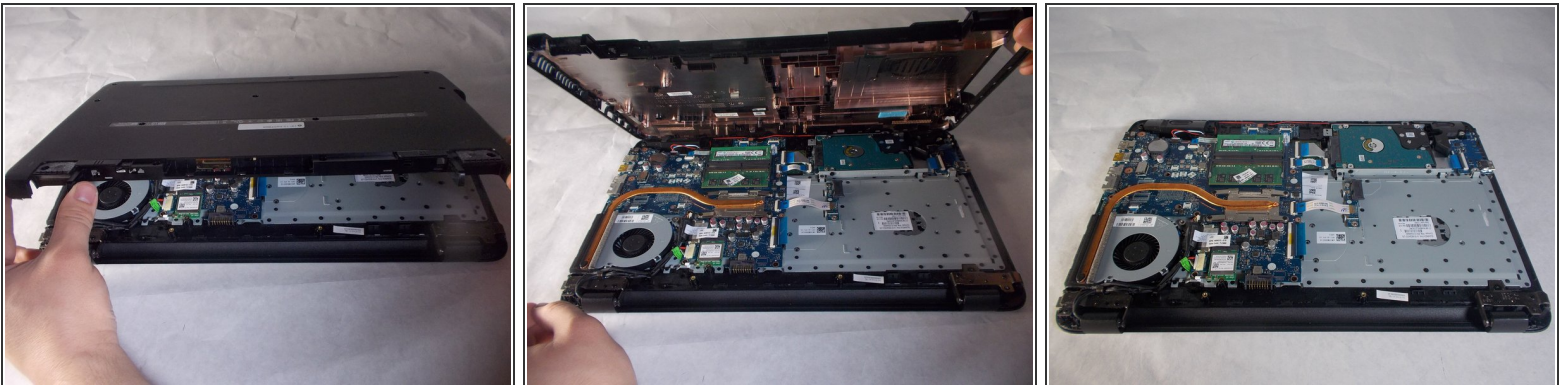

- Carefully pull the shell of the computer apart.

To reassemble your device, follow these instructions in reverse order.