



RedOctane X-Plorer Auxiliary Port Replacement

This guide will show you how to replace the auxiliary port on the RedOctane X-Plorer located at the bottom of the guitar.

Written By: Riley



INTRODUCTION

You can easily access the auxiliary port through the guitar neck. This guide will show you how to replace the auxiliary port located at the bottom of the guitar.

TOOLS:

- [Phillips #1 Screwdriver](#) (1)
-

Step 1 — Rear Case



- Remove the strap by pulling it off of the mounts located on the body and neck.

Step 2




- Remove the nine 12mm Phillips #1 screws around the perimeter of the case with a screwdriver.
- Remove the two 15mm Phillips #1 screws connecting the body panel to the neck panel with a screwdriver.
- ⓘ These screws can also be Torx on some models.
- Pull off the rear case.

Step 3



- Remove the five 12mm Phillips #1 screws along the neck with a screwdriver.
- Pull off the top shell of the neck to expose the internal features.

Step 4 — Auxiliary Port

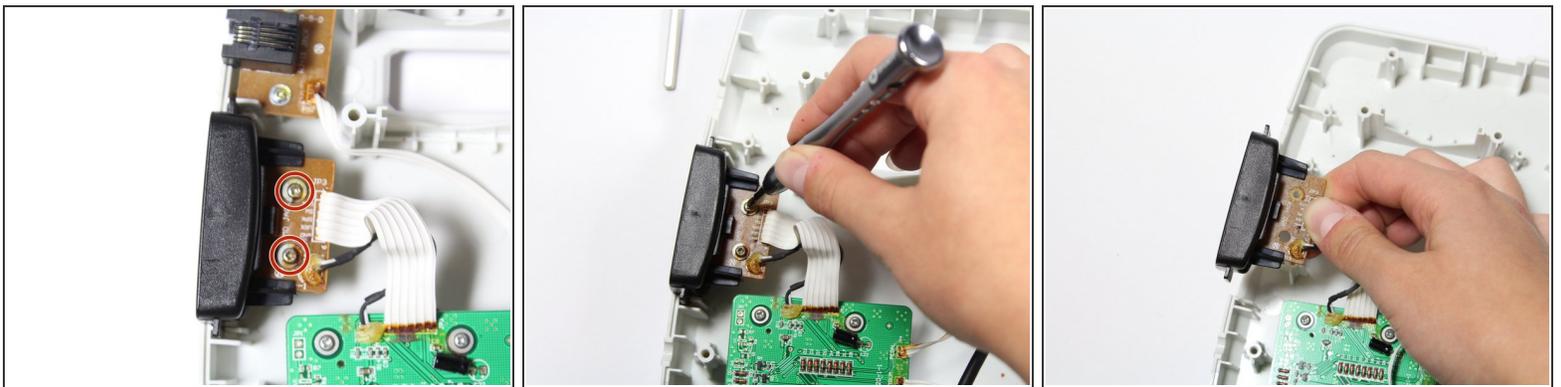

- Remove the two 10mm Phillips #1 screws from the auxiliary port board using a screwdriver.
- Gently lift up on the auxiliary port to remove it from the case.

To reassemble your device, follow these instructions in reverse order.