



Escort Passport Max2 Display Replacement

A Guide for replacing a broken display or screen on the Passport Max2.

Written By: Kelsey Ferrenberg



INTRODUCTION

If the device's screen has distorted images, or is blank and the troubleshooting guides don't seem to fix it, or if the device's screen is cracked, this guide will explain how to replace it.



TOOLS:

- [Spudger](#) (1)
 - [Phillips #1 Screwdriver](#) (1)
-

Step 1 — Exterior Case



- Insert the flat end of a spudger into one of the two notches and pry off the case.

Step 2



- Slide the spudger around the perimeter of the radar housing until the case separates.

Step 3




- Repeat these steps to remove the other side.

Step 4 — Lens





- Remove the four 9mm Phillips #1 screws from the bottom of the radar.
- Remove the bottom case.

Step 5

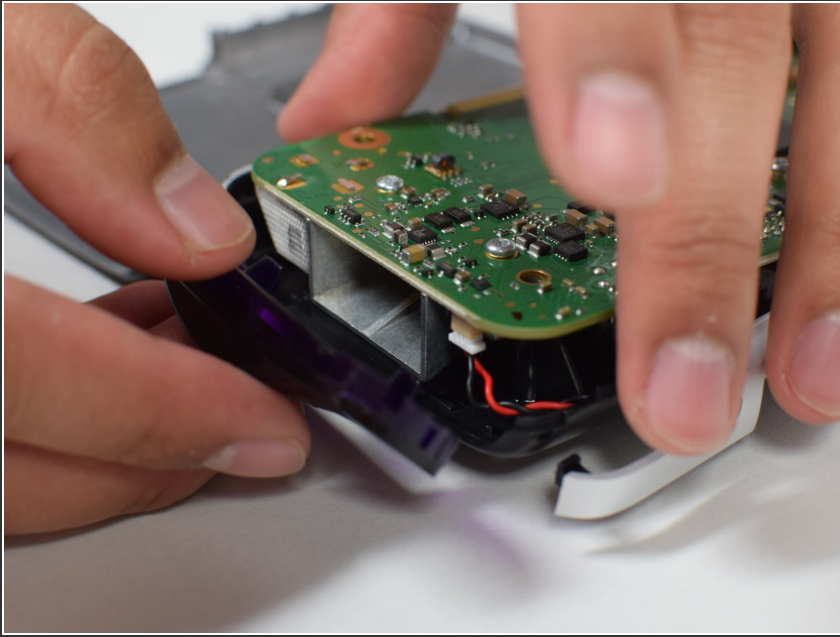

- Gently spread apart the thin silver frame that wraps around the device and remove the dark purple lens.
- ❗ The silver frame can easily pop off of the device now that the bottom metal case has been removed. *Don't worry if it comes off all the way. It can easily be put back in it's place.*

Step 6 — Display

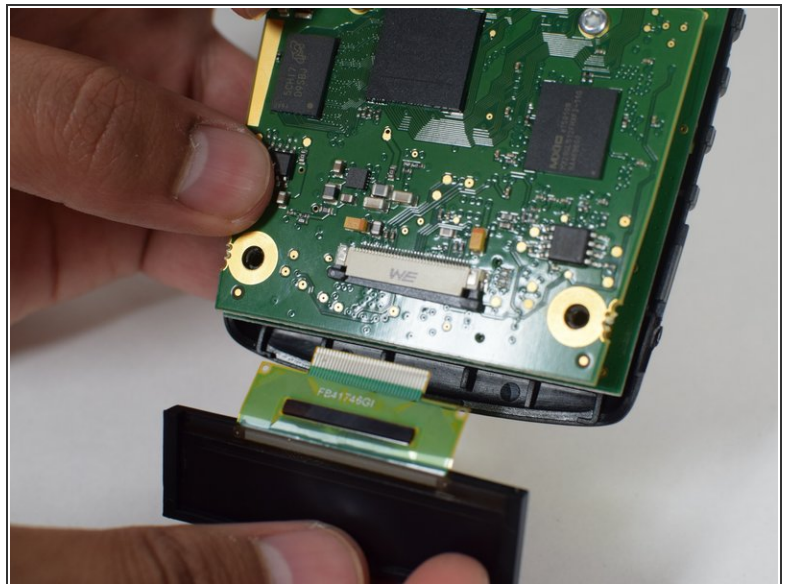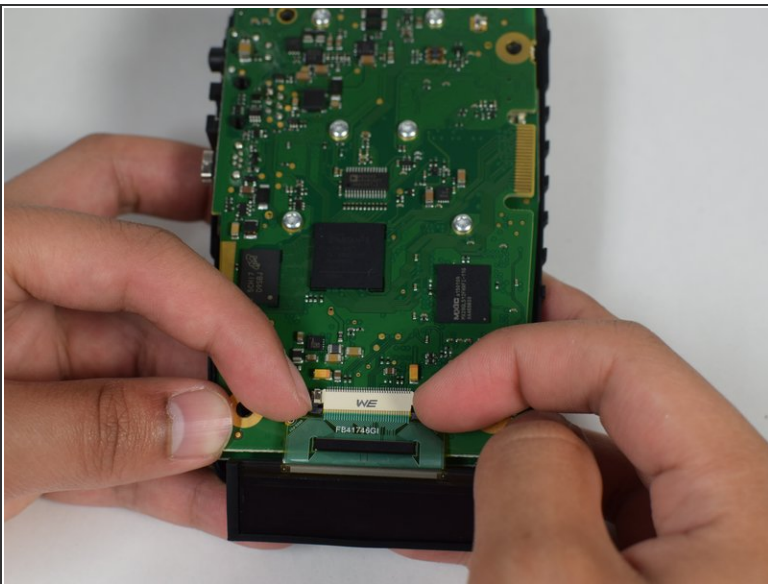

- Push the two black tabs down to release the ribbon attached to the display.
- The display ribbon should now easily slip out from under the white strip.

To reassemble your device, follow these instructions in reverse order.