


Dell Inspiron 15 5565 Hard Drive Replacement

Written By: Terrence15

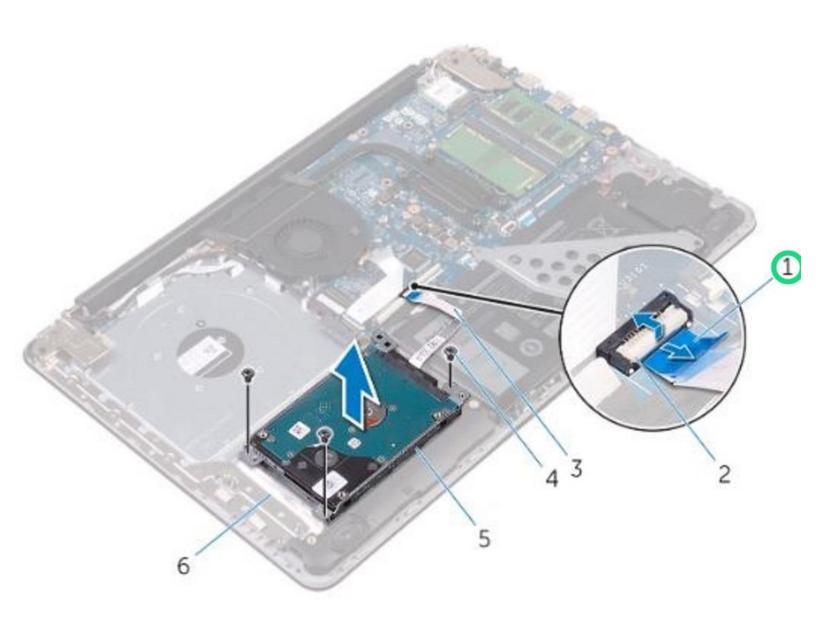

INTRODUCTION

In this guide, we will show you how to remove and replace the Hard Drive.



TOOLS:


• Phillips #0 Screwdriver (1)



PARTS:


- 250 GB SSD (1)
- 500 GB SSD (1)
- 1 TB SSD (1)
- 2 TB SSD (1)

Step 1 — Lifting the Latch

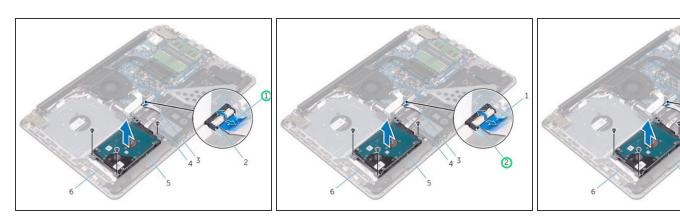


- MARNING: Before working inside your computer, read the safety information that shipped with your computer and follow the steps in <u>Before Working Inside Your Computer</u>. After working inside your computer, follow the instructions in <u>After Working Inside Your Computer</u>.
- ↑ CAUTION: Hard drives are fragile. Exercise care when handling the hard drive.
- Lift the latch and using the pull tab, disconnect the hard-drive cable from the system board.

Step 2 — Remove the Screws

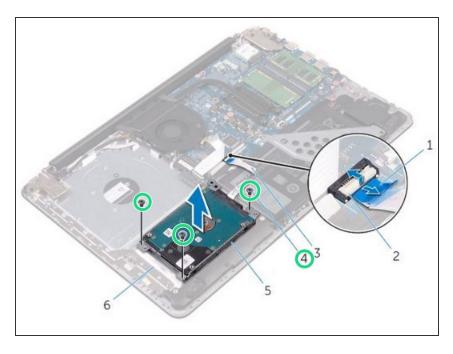


 Remove the screws that secure the hard-drive assembly to the palm rest and keyboard assembly.


Step 3 — Lifting the Hard Drive Assembly

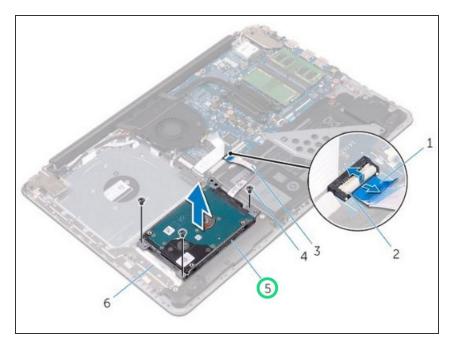

 Lift the hard-drive assembly along with its cable off the palm rest and keyboard assembly.


Step 4 — **Disconnecting the Interposer**

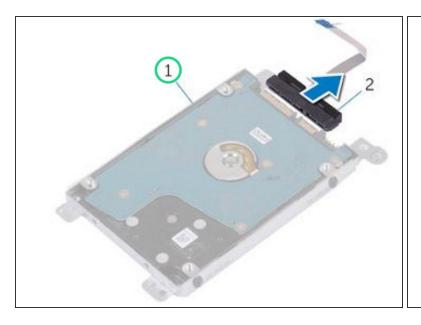

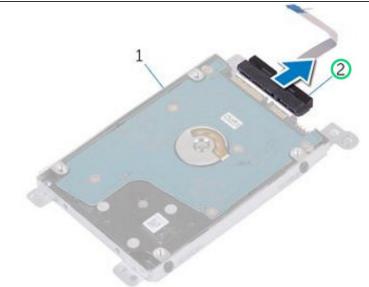

Disconnect the interposer from the hard-drive assembly.

Step 5 — Remove the Screws

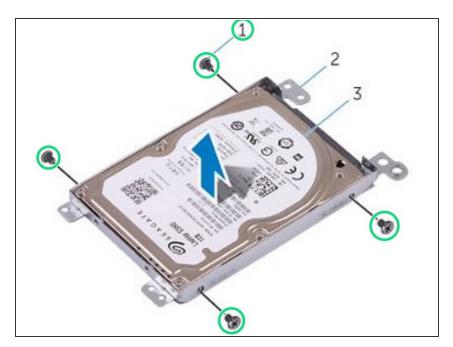

 Remove the screws that secure the hard-drive bracket to the hard drive.


Step 6 — Lifting the Hard Drive






Lift the hard drive off the hard-drive bracket.

Step 7 — Align the Screw Holes

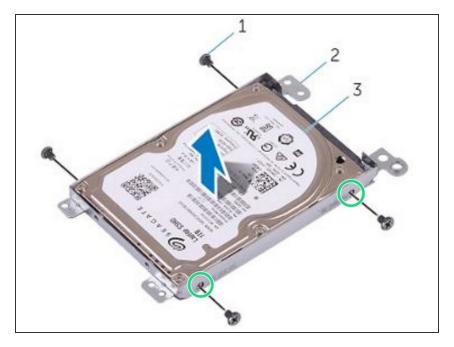


 Align the screw holes on the harddrive bracket with the screw holes on the **NEW** hard drive.

Step 8 — Replace the Screws

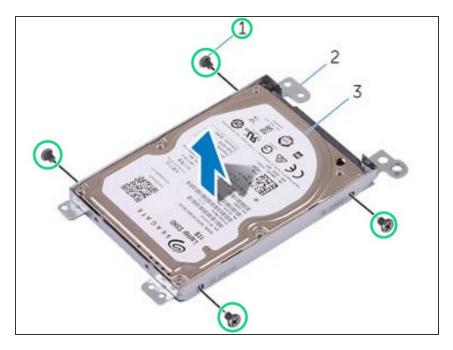


 Replace the screws that secure the hard-drive bracket to the hard drive.

Step 9 — Connecting the Interposer

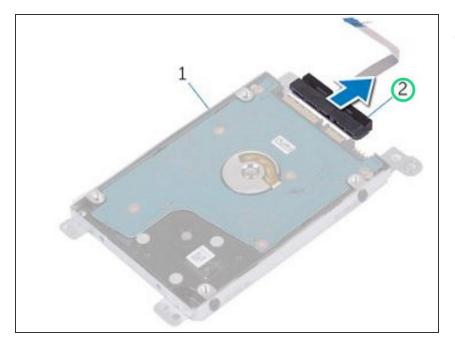


 Connect the interposer to the harddrive assembly.

Step 10 — Align the Screw Holes

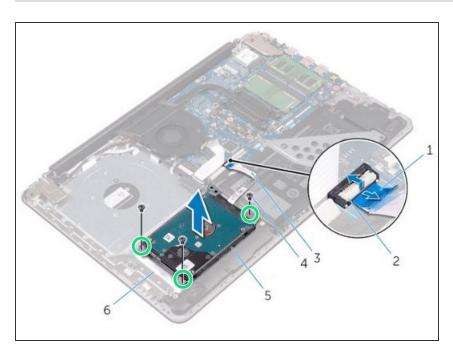


 Align the screw holes on the harddrive assembly with the screw holes on the palm rest and keyboard assembly.

Step 11 — Replace the Screws

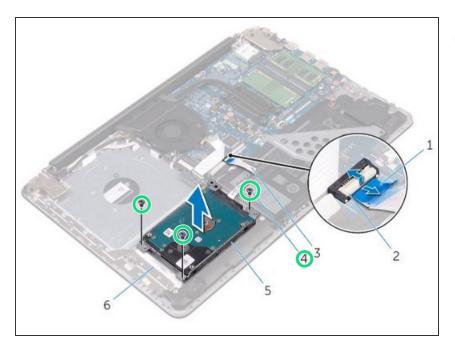

 Replace the screws that secure the hard-drive assembly to the palm rest and keyboard assembly.

Step 12 — Connect the Hard Drive Cable

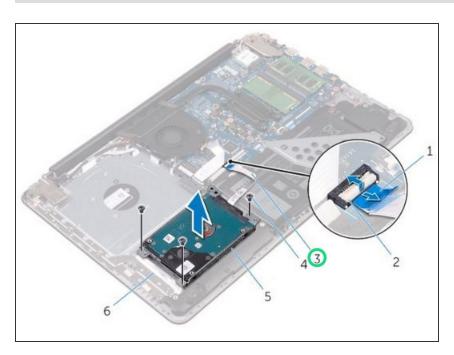

 Connect the hard-drive cable to the system board and close the latch to secure the cable.