




Dell Inspiron 15 5566 Memory Modules Replacement

Written By: Terrence15

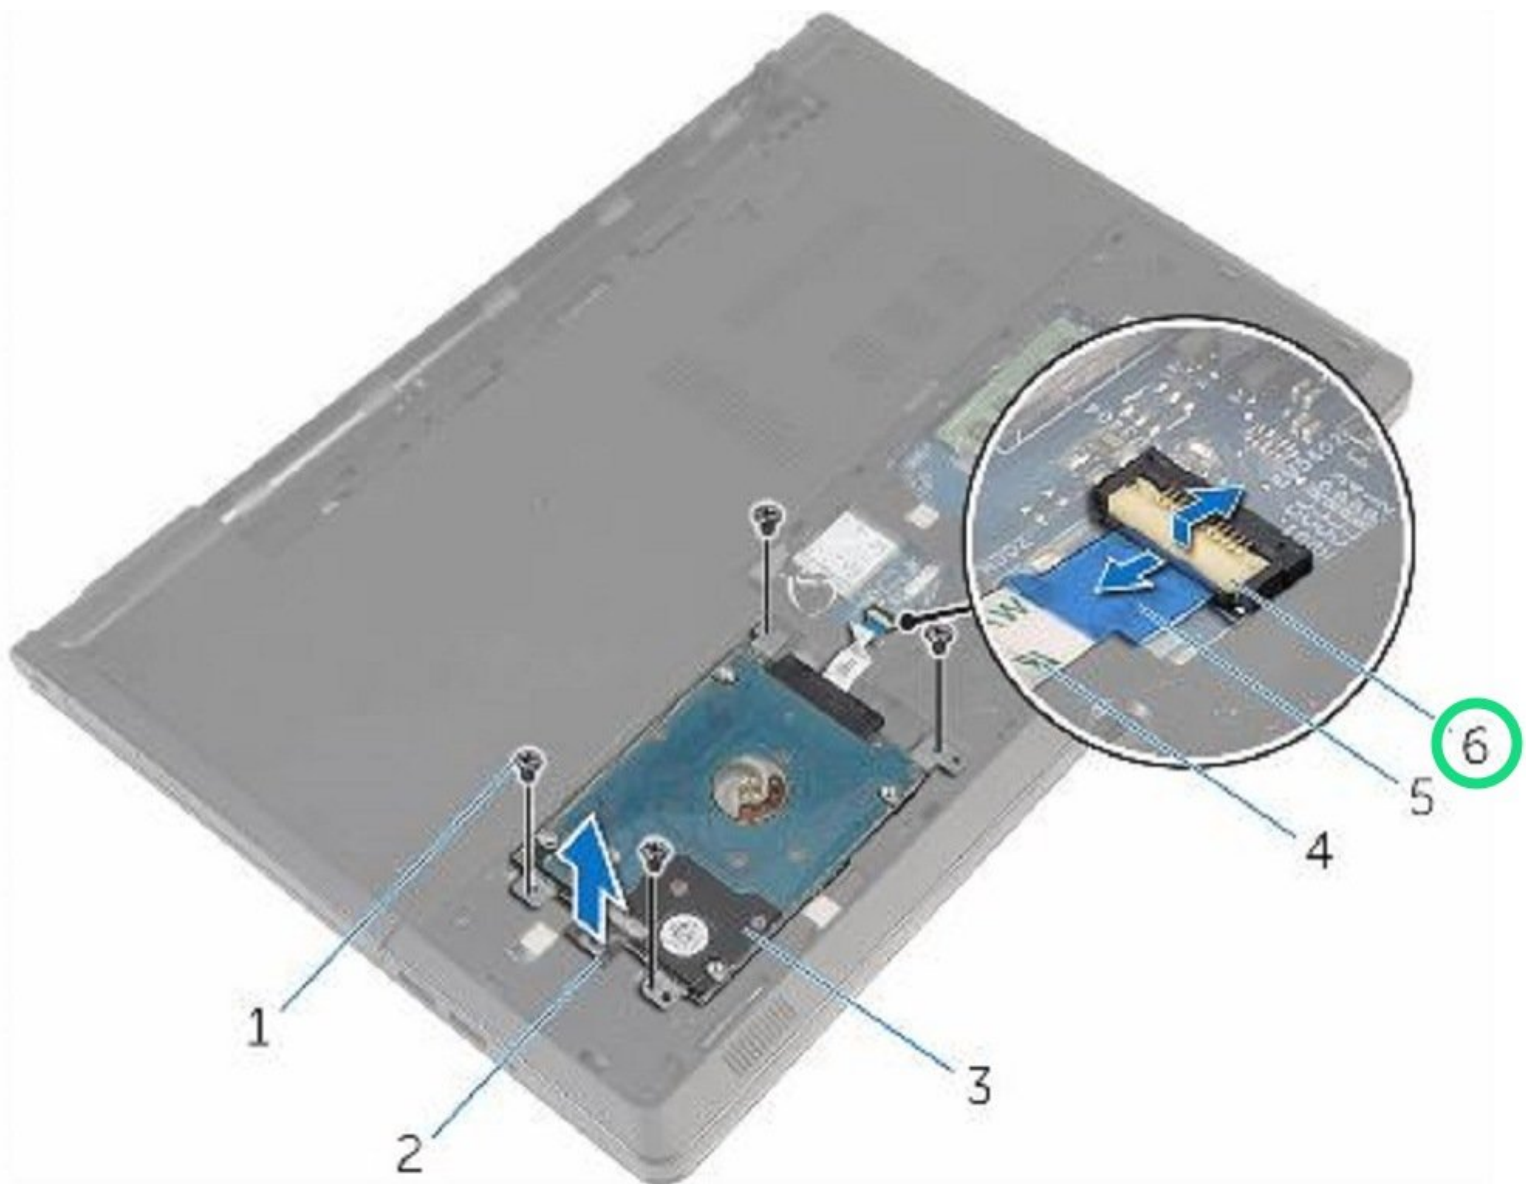

INTRODUCTION


In this guide, we will be showing you how to remove and replace the Hard Drive.



TOOLS:

- [Phillips #0 Screwdriver](#) (1)
-

Step 1 — Lifting the Latch

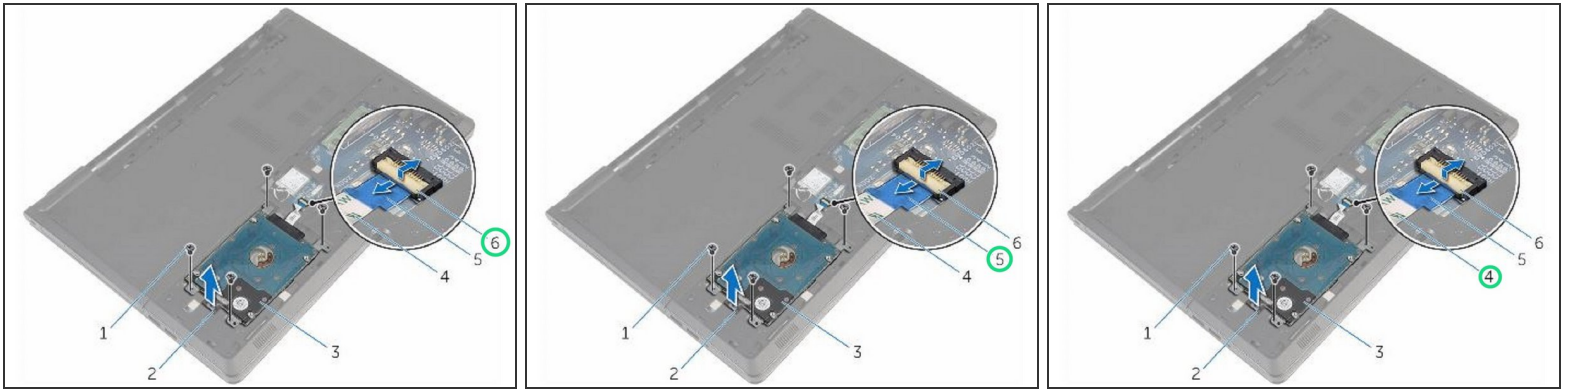


⚠ WARNING: Before working inside your computer, read the safety information that shipped with your computer and follow the steps in [Before Working Inside Your Computer](#). After working inside your computer, follow the instructions in [After Working Inside Your Computer](#).

⚠ CAUTION: Hard drives are fragile. Exercise care when handling the hard drive.


- Lift the latch and using the pull tab disconnect the hard-drive cable from the system board.

Step 2 — Remove the Screws

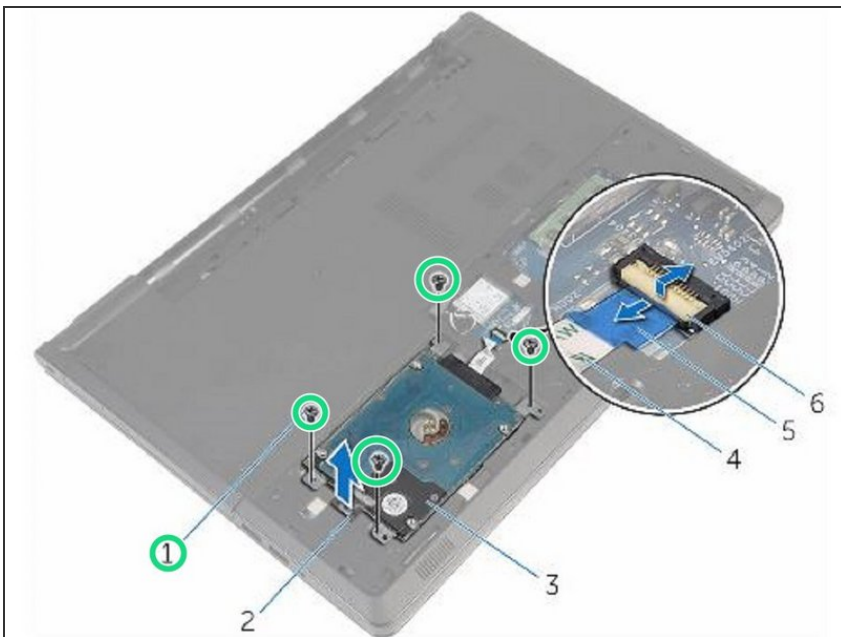

- Remove the four screws (M2.5x8) that secure the hard-drive assembly to the computer base.

Step 3 — Lifting the Hard Drive Assembly

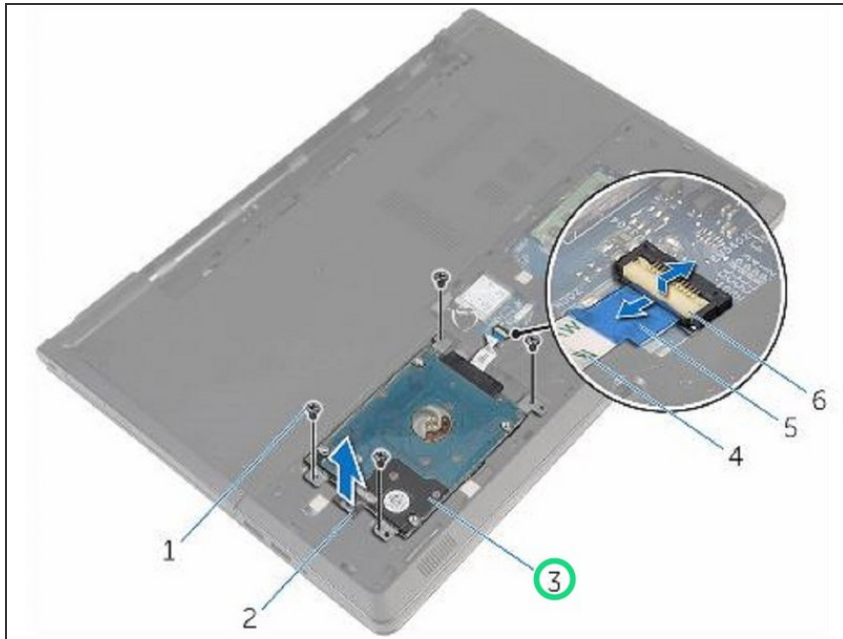


- Lift the hard-drive assembly out of the computer base using the hard-drive pull tab.

Step 4 — Disconnecting the Interposer





- Disconnect the interposer from the hard drive.

Step 5 — Remove the Screws

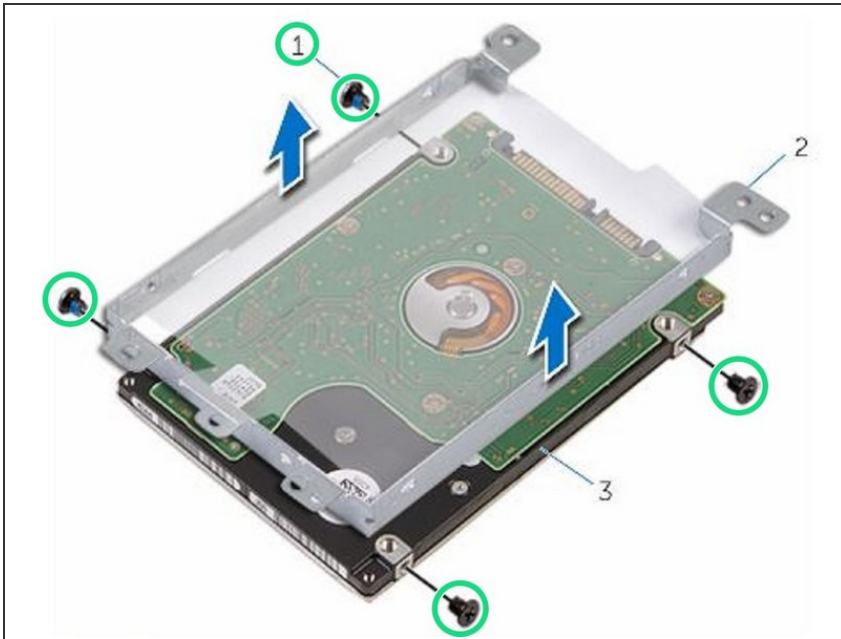


- Remove the four screws (M3x3) that secure the hard-drive bracket to the hard drive.

Step 6 — Lifting the Hard Drive Bracket

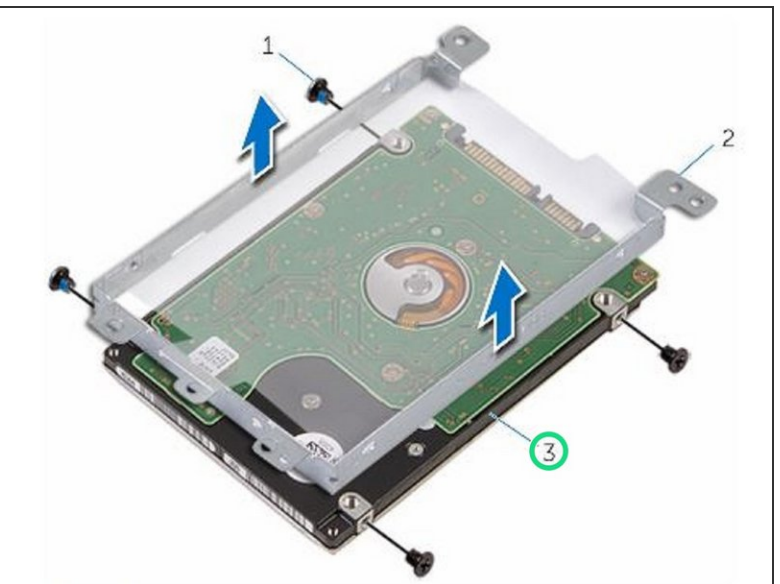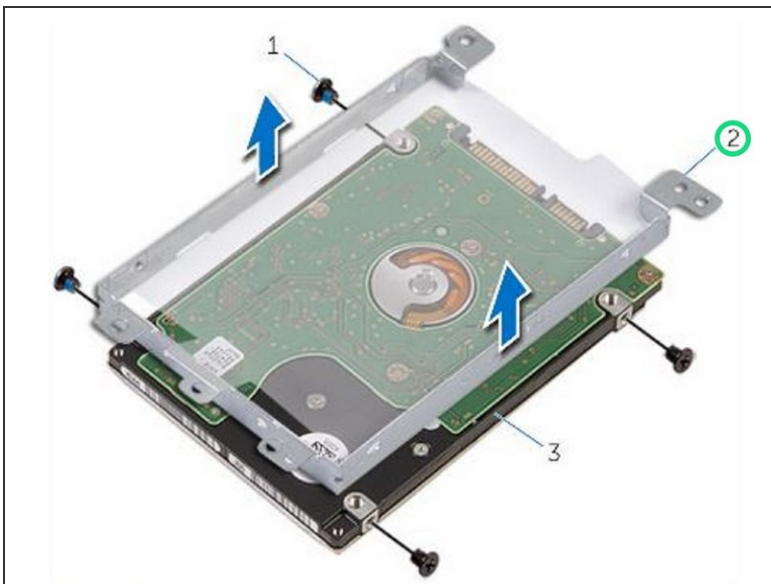


- Lift the hard-drive bracket out of the hard drive.

Step 7 — Placing the Hard Drive Bracket

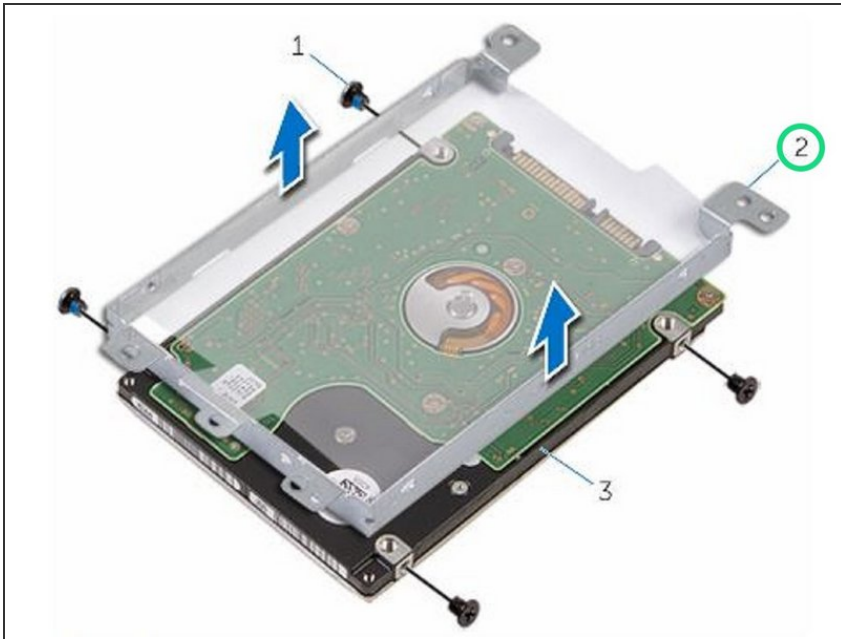


- Place the hard-drive bracket on the **NEW** hard drive.

Step 8 — Align the Screw Holes

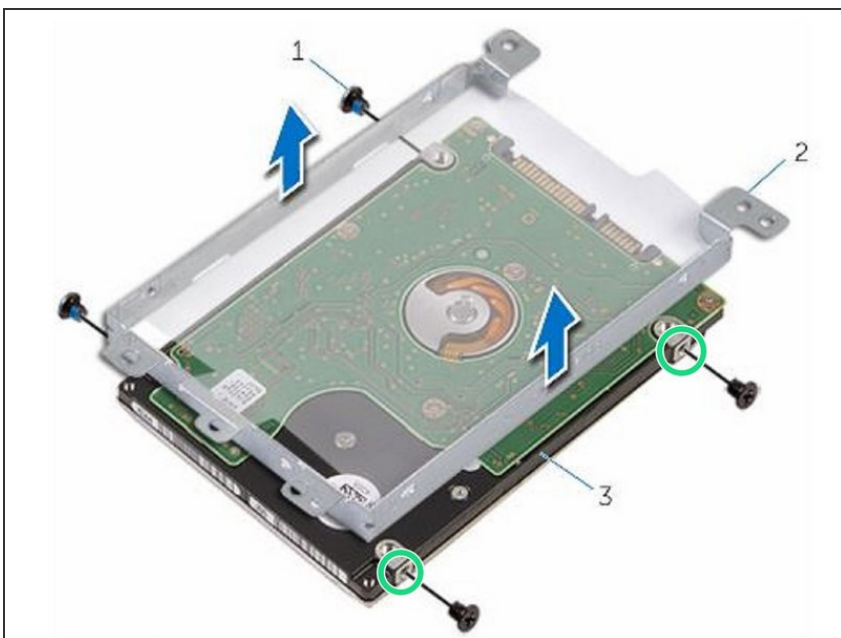

- Align the screw holes on the hard-drive bracket with the screw holes on the hard drive.

Step 9 — Replace the Screws

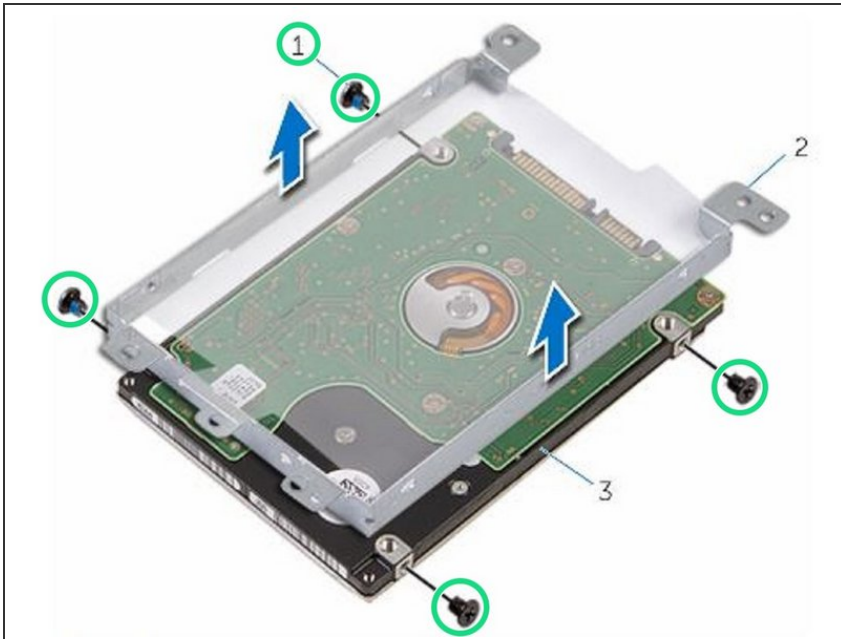


- Replace the four screws (M3x3) that secure the hard-drive bracket to the hard drive.

Step 10 — Connect the Interposer




- Connect the interposer to the hard drive.

Step 11 — Placing the Hard Drive Assembly

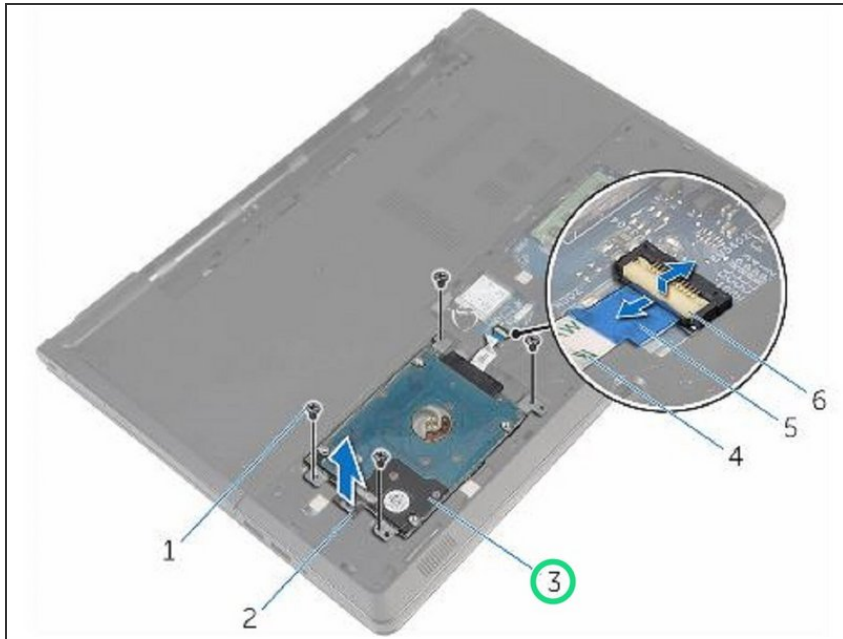


- Place the hard-drive assembly in the computer base and align the screw holes on the hard-drive assembly with the screw holes on the computer base.

Step 12 — Replace the Screws

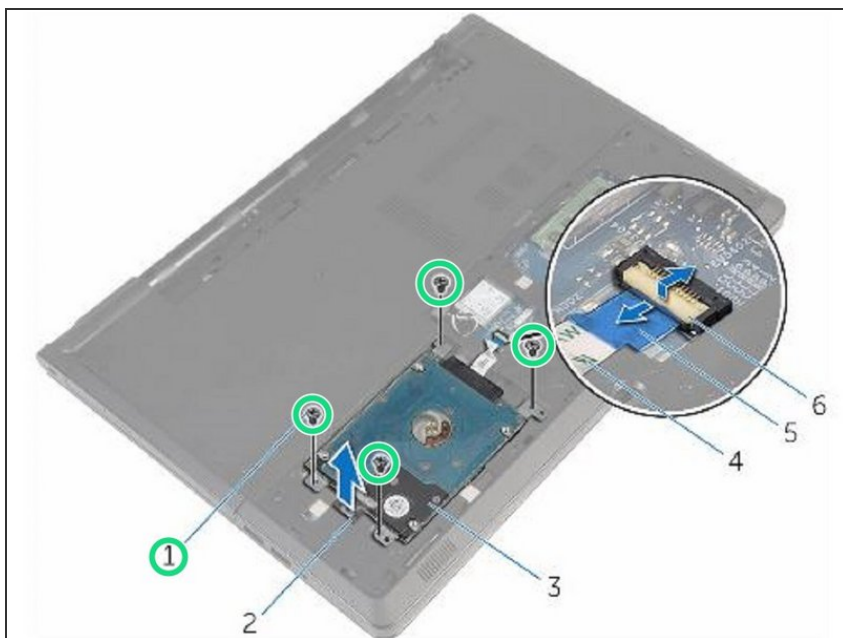

- Replace the four screws (M2.5x8) that secure the hard-drive assembly to the computer base.

Step 13 — Sliding the Hard Drive Cable

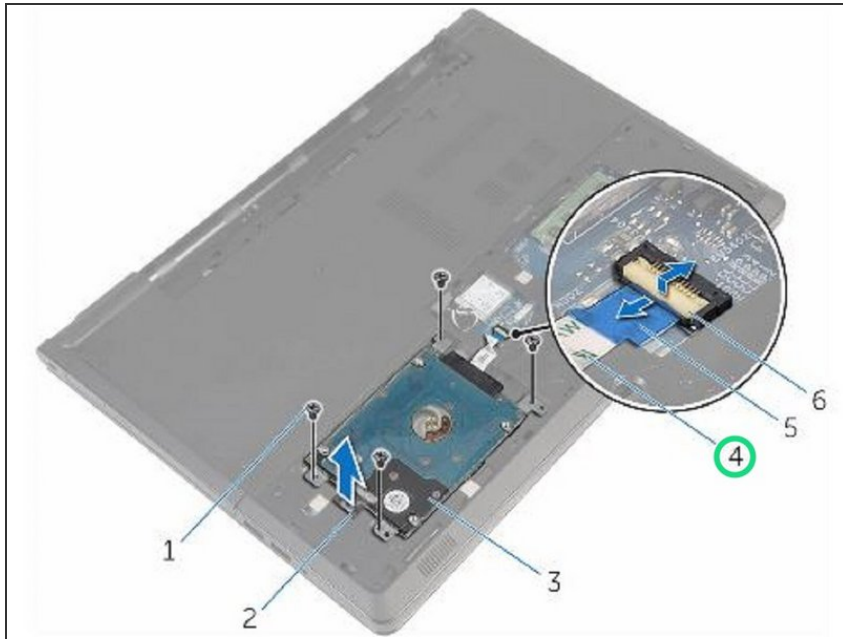

- Slide the hard-drive cable into the connector and press down on the latch to secure the cable to the system board.