



Braun 5514 Motor Replacement

This guide takes one through the process of how to access and replace the motor in a Braun 5514 trimmer.

Written By: Andrew Kluckhuhn



INTRODUCTION

It is possible, though honestly rare, for the motor of a trimmer to fail for one reason or another. If changing the batteries does not restore functionality for this model, trying to replace the motor would be the next step.

TOOLS:


- [iFixit Opening Picks set of 6](#) (1)
 - [Soldering Iron](#) (1)
 - [1.5mm Flat Screwdriver](#) (1)
 - [T6 Torx Screwdriver](#) (1)
 - [Screw Extracting Pliers](#) (1)
-

Step 1 — Motor



- Remove any attached trimmer heads by gripping and pulling away from the body.

Step 2

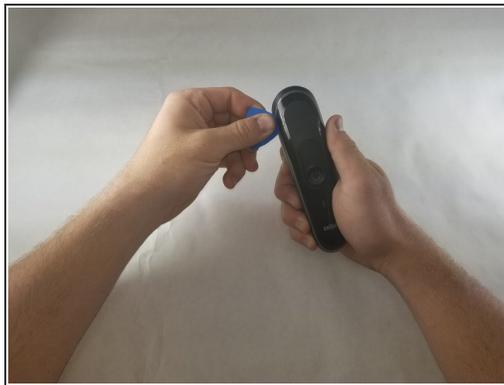

- Insert an opening pick between the top plate and the grey separator.
- Slide the opening pick around the perimeter of the plate to release the hidden clips.

Step 3




- Remove the four 7mm Torx T6 screws attaching the grey plastic frame to the black plastic casing.

Step 4



- Use the opening pick to lift the grey frame from the black casing.

Step 5

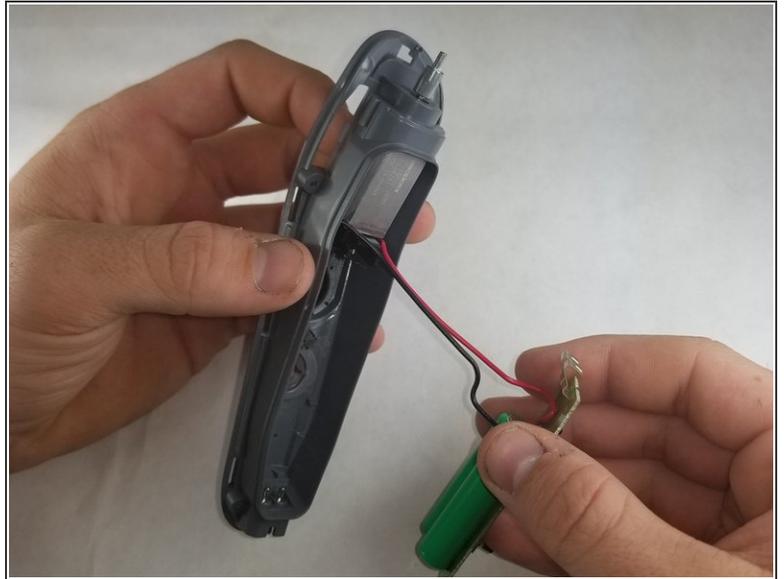



- Remove the circuit board assembly from the frame.

Step 6



- Pull the small black plastic piece out of the frame.

Step 7

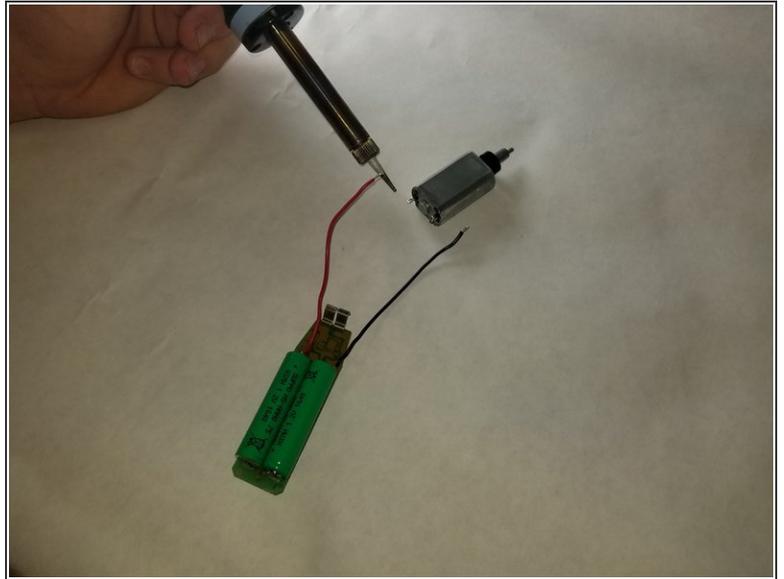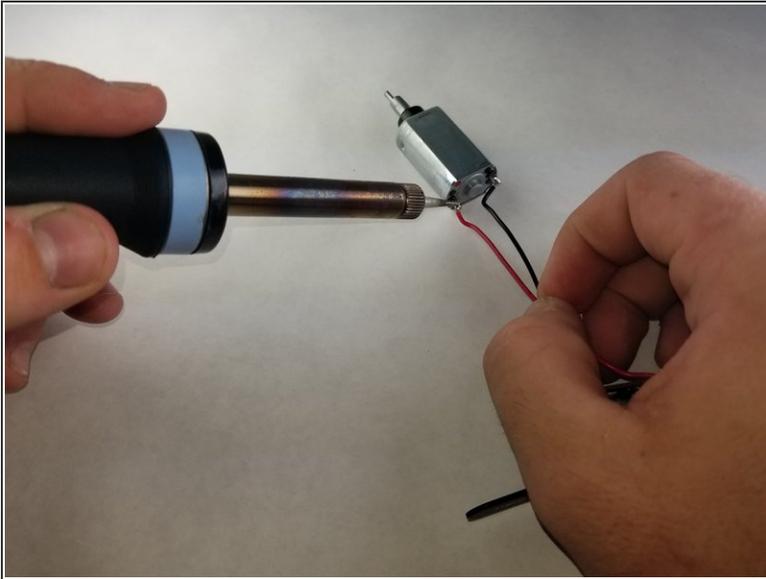

- Desolder the wires attached to the motor.
- ⓘ Remember where the red and black wires attach in case the replacement motor doesn't have it labeled.

To reassemble your device, follow these instructions in reverse order.