



iPad Mini CDMA Small Metal Bracket Replacement

Prereq for removing speakers with battery.

Written By: Walter Galan



INTRODUCTION

Prereq for removing speakers with battery.


TOOLS:

[Spudger](#) (1)

[iFixit Opening Tool](#) (1)


[Tweezers](#) (1)

Step 1 — Small Metal Bracket

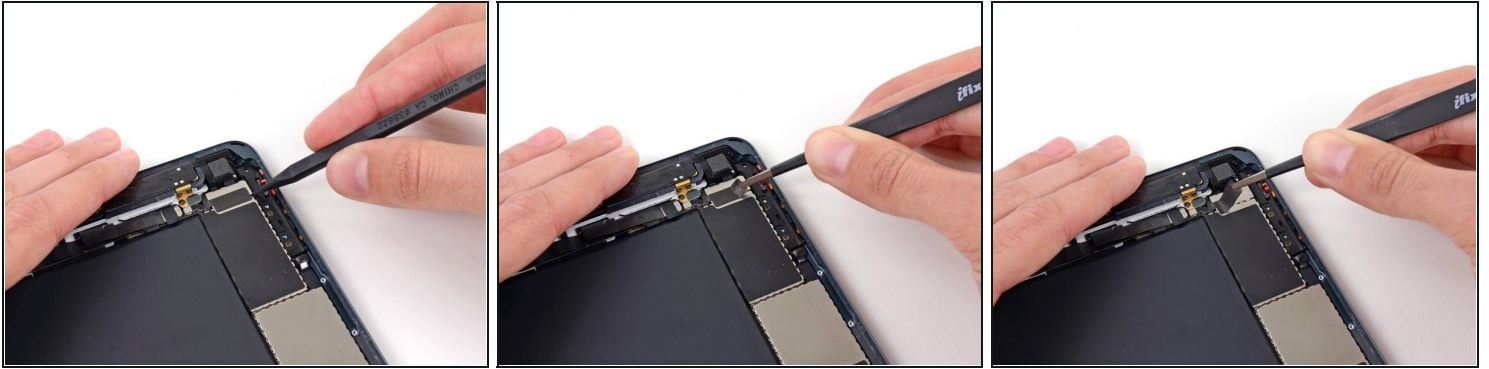


- Use the tip of a spudger to start peeling up the right side of the black tape covering the small metal bracket.
- Peel the tape up the rest of the way with [tweezers](#), and remove it from the bracket.

Step 2

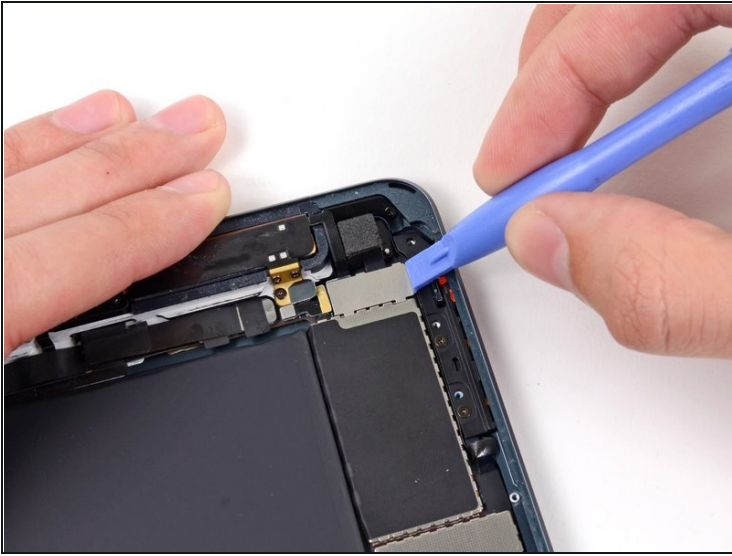

- Use a plastic opening tool to push the metal bracket slightly to the left.

Step 3

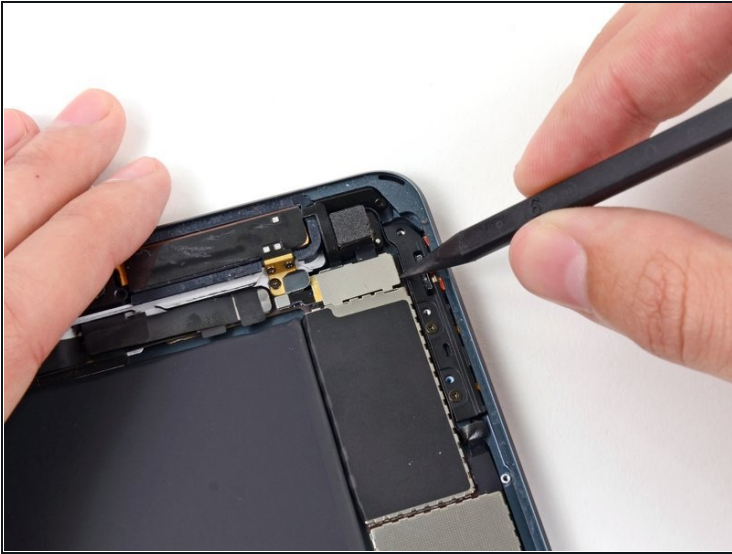

- Use the tip of a spudger to lift up the lower side of the metal bracket.

Step 4



- Grab the bracket with tweezers and lift it up out of the iPad.
- ☑ During reassembly, hook the top edge of the plate in place first, then lower the bottom into its slots.

To reassemble your device, follow these instructions in reverse order.