




# Disassembling Midland X-tra Talk Radio LXT118 Case

After the batteries are removed the case can be...

Written By: James Tucker Dunn

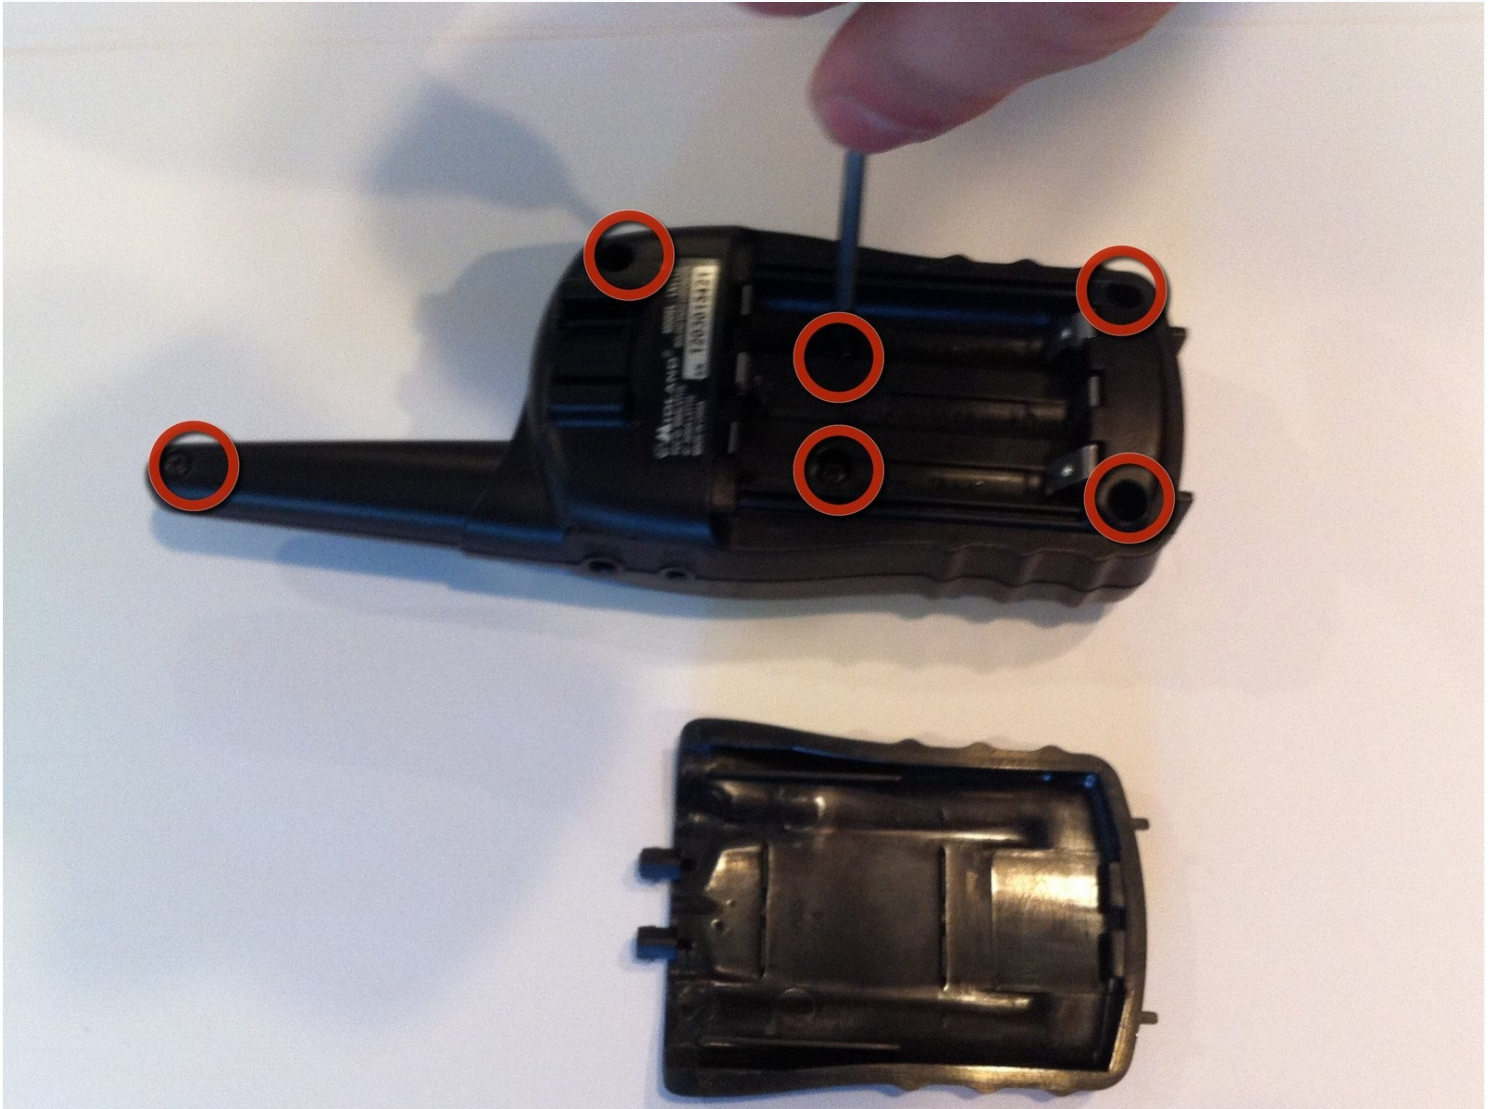

# INTRODUCTION

After the batteries are removed the case can be disassembled.

---

## TOOLS:

Phillips #0 Screwdriver (1)

Spudger (1)

---

## Step 1 — Batteries




- First, apply pressure with your thumb on the top of the battery cover.
- Next, pull down on the cover until it begins to slide.

## Step 2



- Finally, once the cover is completely off, pry up the old batteries with your finger or a strong, skinny tool (i.e. spudger).


## Step 3 — Case

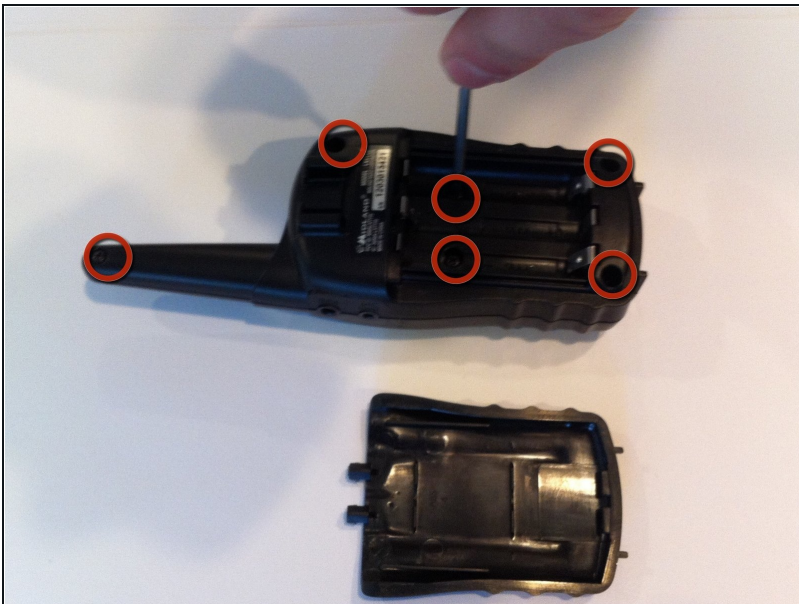

- Unscrew the six 8.0 millimeter long, #0 screws on the backside of the case using the Phillips #0 screwdriver.



## Step 4

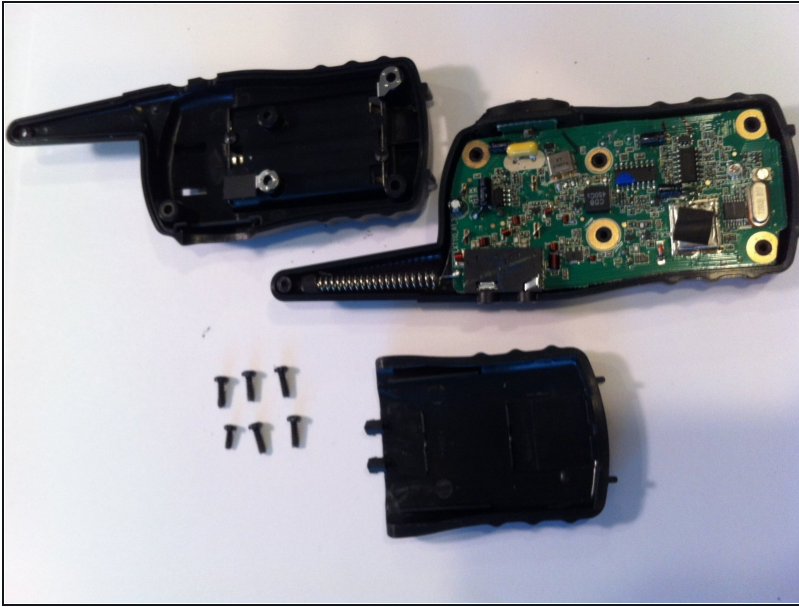

- Detach back part of the case by gently lifting up.

---

To reassemble your device, follow these instructions in reverse order.