



Pop-Up Assembly Stopper Piece Replacement

The replacement of a pop-up stopper piece in the main assembly of a bathroom sink drain.

Written By: Brenna Stafford



INTRODUCTION

The sink is one of the most overused fixtures in our lives. In this guide, the process of replacing a pop-up stopper in the bathroom sink is useful to plug the drain to fill the sink with water and to also catch any unwanted items disappearing down the drain.

TOOLS:

- [Bucket](#) (1)

Step 1 — Pop-Up Stopper Piece



- Place bucket directly under the sink below the pop-up assembly. *Excess water may leak*
- The pivot rod that is inserted within a hole in the pop-up extension bar. Move the pop-up extension bar away from the pivot rod.

Step 2



- Disconnect the pivot rod from the center pop-up extension.

Step 3




- Lift up the center pop-up rod on the faucet until it is detached. The extension rod will pull up with it.

Step 4



- Below the sink is the pivot nut. Turn the pivot nut counterclockwise until it is completely loose and remove from the pivot rod.

Step 5

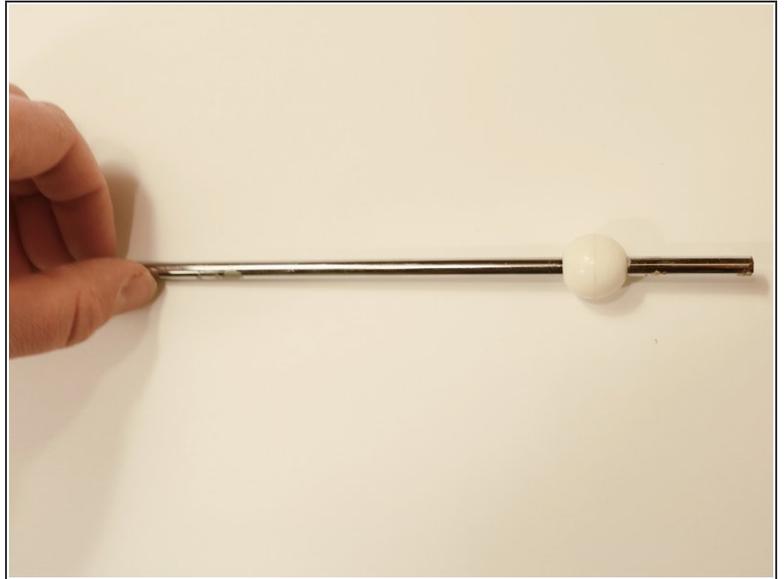

- Pull the pivot rod out to expose the ball. Remove the whole pivot rod fixture.

Step 6



- In the sink, the pop-up stopper will be loose.
- Pull up on the pop-up stopper to separate it from the main pop-up assembly.

To reassemble your device, follow these instructions in reverse order.