



HP Pavilion x360 14-ba253cl Display Replacement

If you need to replace your HP Pavilion x360...

Written By: Kyras Ross



INTRODUCTION

If you need to replace your HP Pavilion x360 14-ba253cl display, use this guide to do so. The Digitizer is also connected to the LCD screen, so both can be removed together and bought together. For this guide you will need an opening pick and tweezers. Gloves can be used to protect your hands from contact with any misplaced glass. Power down your laptop before beginning this guide.


TOOLS:

[iFixit Opening Picks \(Set of 6\)](#) (1)
[ESD Safe Blunt Nose Tweezers](#) (1)

PARTS:



[HP Pavilion x360 14 Display](#) (1)

Step 1 — Display

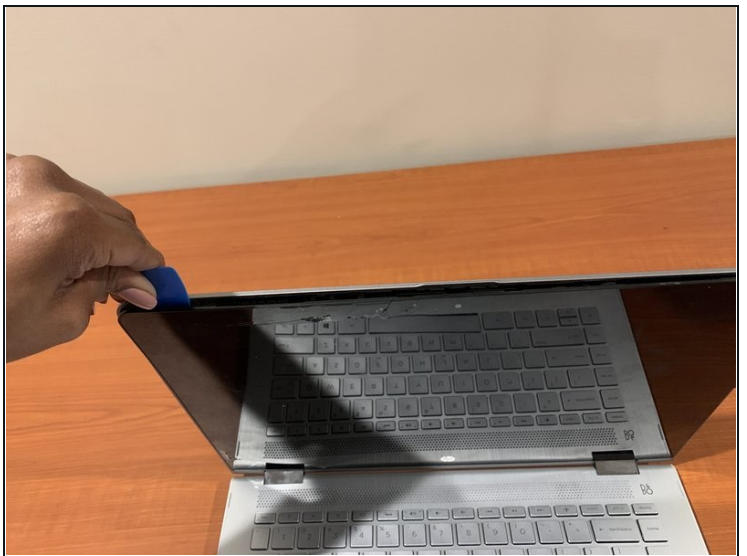




- Insert an opening pick between the screen and top case to separate it from the laptop.

Step 2

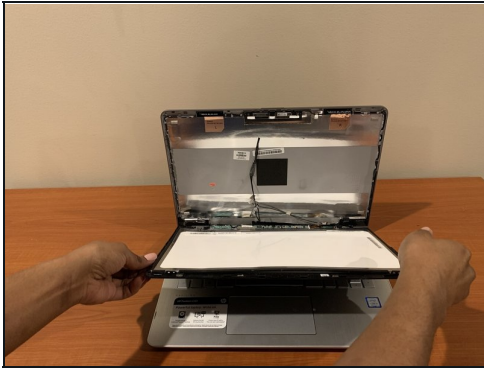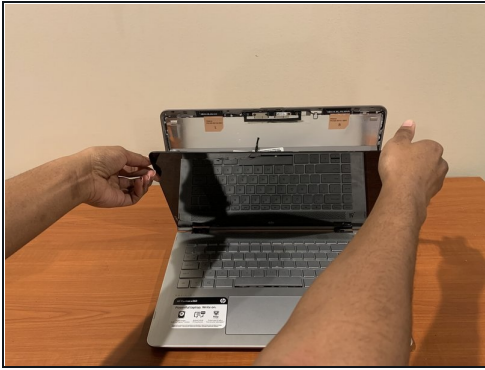

- Once the screen is pryed away from the laptop, lay the screen face down onto the keyboard.

Step 3

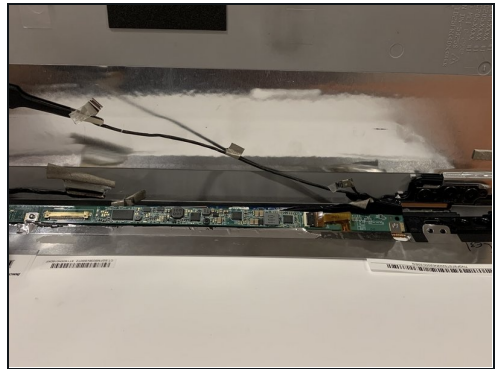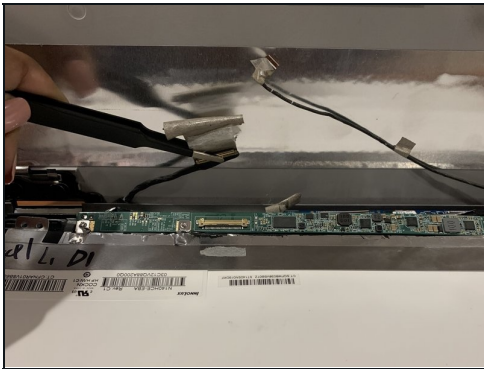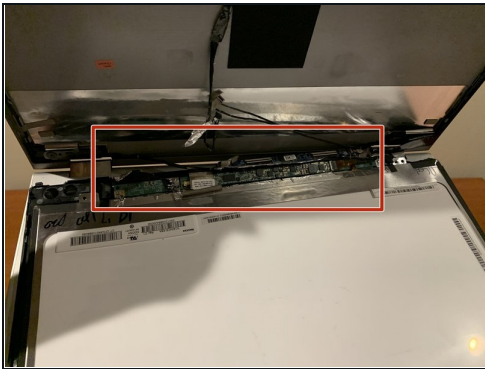

- Remove any tape or wires that connect the screen and laptop together using tweezers.

Step 4



- Remove the display from the laptop.

To reassemble your device, follow these instructions in reverse order.