



# OnePlus 6 Speaker Replacement

The OnePlus 6 smartphone might need a speaker...

Written By: Noah Matthew Axtell



# INTRODUCTION

The OnePlus 6 smartphone might need a speaker replacement for several reasons, like water damage or wear from regular use. The internal speaker plays sound out loud when no external audio output is present. If the device will not play sound or sounds come out distorted, a speaker replacement may be required.

As this guide will help everyday users replace a part within the device, they should be aware of potential damage from using the heat gun. While working on the inside of the mobile phone, users should be careful not to damage any delicate parts.

---

## TOOLS:

[iFixit Opening Picks \(Set of 6\)](#) (1)

[Prying and Opening Tool Assortment](#) (1)

[Heat Gun](#) (1)

[Hair Dryer](#) (1)

*(Optional)*

[Tweezers](#) (1)

---

## Step 1 — Back Panel



- Turn on the heat gun to a low heat and gently heat the curved edges on the back of the phone.  
**⚠ Be careful not to overheat or melt the plastic; heat guns can get out of hand quickly!**
- Wedge the opening picks between the front and back panel and slide them around the perimeter to break the adhesive securing the back cover.
- Repeat until the back panel is fully released.




## Step 2



- Gently lift up the back panel, with care not to damage the fingerprint sensor ribbon cable.

## Step 3

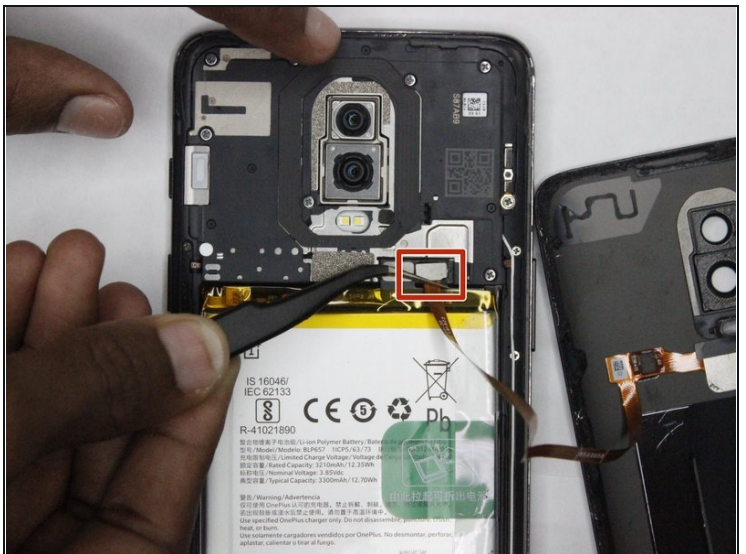


- Use a pair of tweezers to gently pull up on the red tab and disconnect the cable from the device.
- Completely remove the back panel from the device.

## Step 4 — Battery



- Grip the green tab connected to the battery and pull the battery directly up and out.


## Step 5 — Speaker

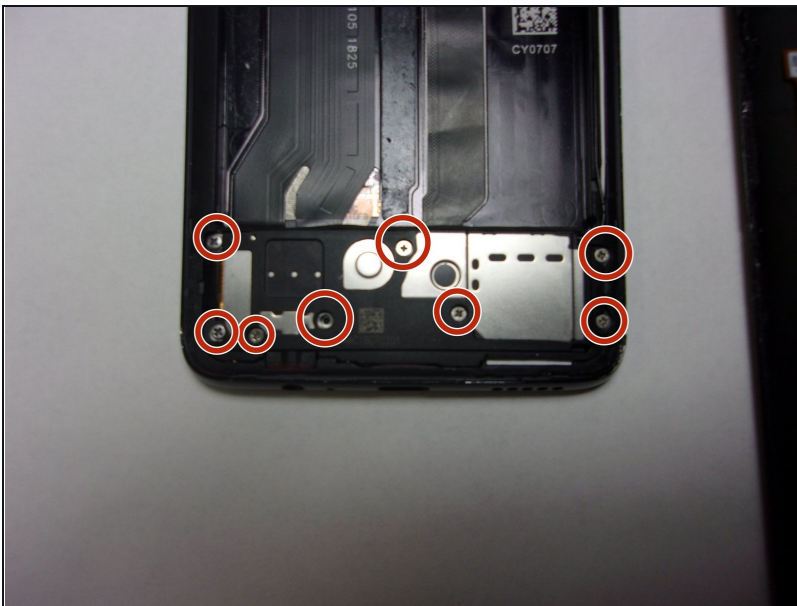

- Use a Phillips #000 screwdriver to remove the eight screws.
- Carefully lift the speaker up and out of the chassis.
- ⓘ If you're completing a screen replacement, skip to Step 9.



## Step 6

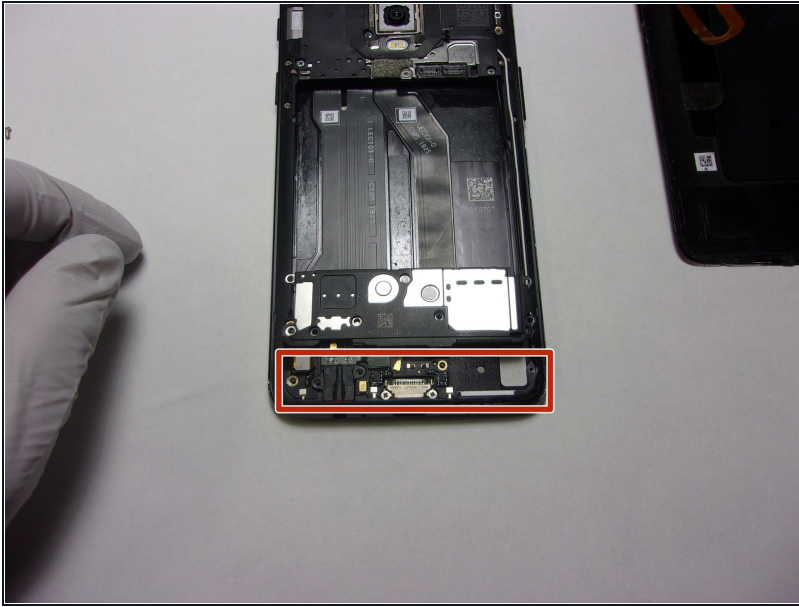

- Properly orient the new speaker unit and use a Phillips #000 screwdriver to replace the eight screws removed from the previous step.

## Step 7



- Place the battery back into the phone and connect it to the same port, making sure to firmly press the connection down into place.
- Place the red cover back over the top of the port.

## Step 8



- Strip the existing adhesive, and place new adhesive around the entire perimeter of the back cover.
- Replace the back cover and hold it down for about a minute to let the adhesive set.

---

Enjoy your new speaker!