



BlackBerry 7510 Keypad Replacement

How to replace a BlackBerry 7510 keypad.

Written By: Neil Johnson



INTRODUCTION

This is a guide showing how to repair your keypad for the RIM blackberry 7510.



TOOLS:

- [T6 Torx Screwdriver](#) (1)
-

Step 1 — Back Face of Phone



- ❗ Remove the battery cover and battery before continuing.
- Remove the six T6 Torx screws on the back of the phone.
- Make sure to keep the screws somewhere that they will not get lost.

Step 2



- Using your finger nail or a spudger, carefully pry up the back cover.
- Begin in one spot and slowly circle around the device as you pry up all of the back cover.

Step 3




- Lift off the back cover.

Step 4





- Remove the two T6 screws.

Step 5

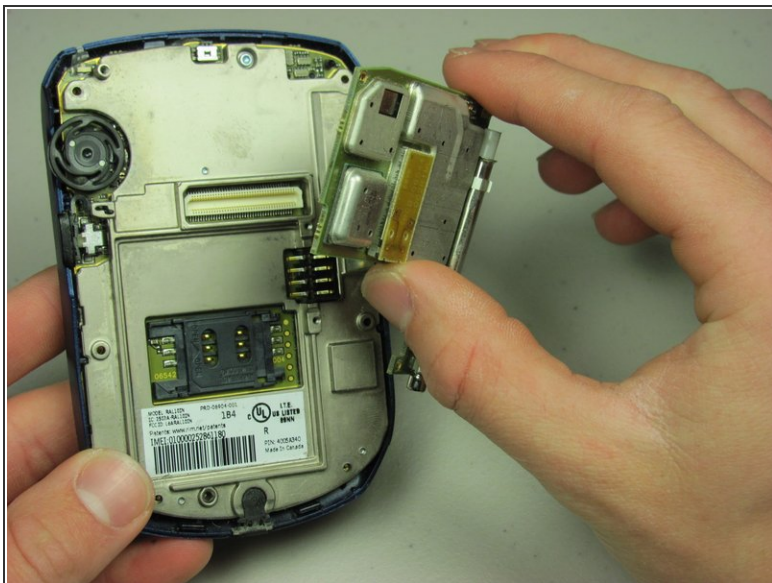

- Remove the daughterboard.
- Remove the exposed vibration motor.

Step 6 — Keypad

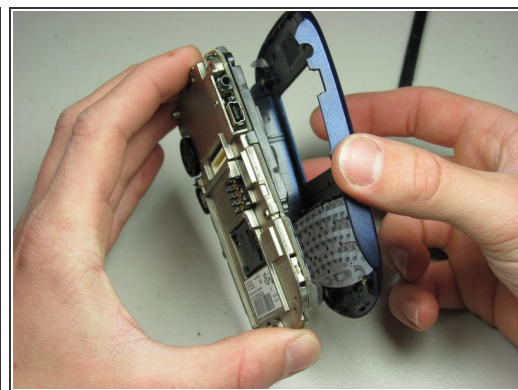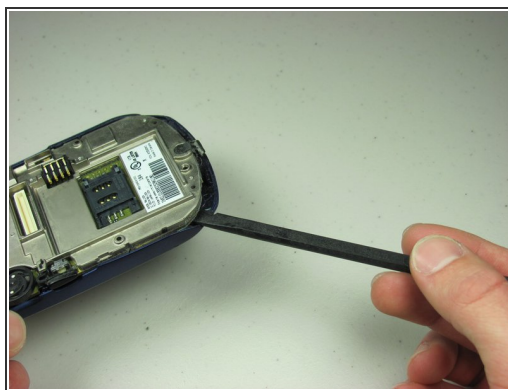

- Unscrew metal plate.
- Pry off front cover.
- Lift off front cover to expose LCD screen.

Step 7



- Remove keypad from front cover and replace or fix existing pad.

To reassemble your device, follow these instructions in reverse order.