



# Disassembling Keurig Mini B-31 Arm

PREREQUISITE ONLY

Written By: Andrew Adriance



 **TOOLS:**


- [Phillips #1 Screwdriver](#) (1)
-

## Step 1 — Arm




- With the needle removed, open the device by pulling up on the handle.

## Step 2

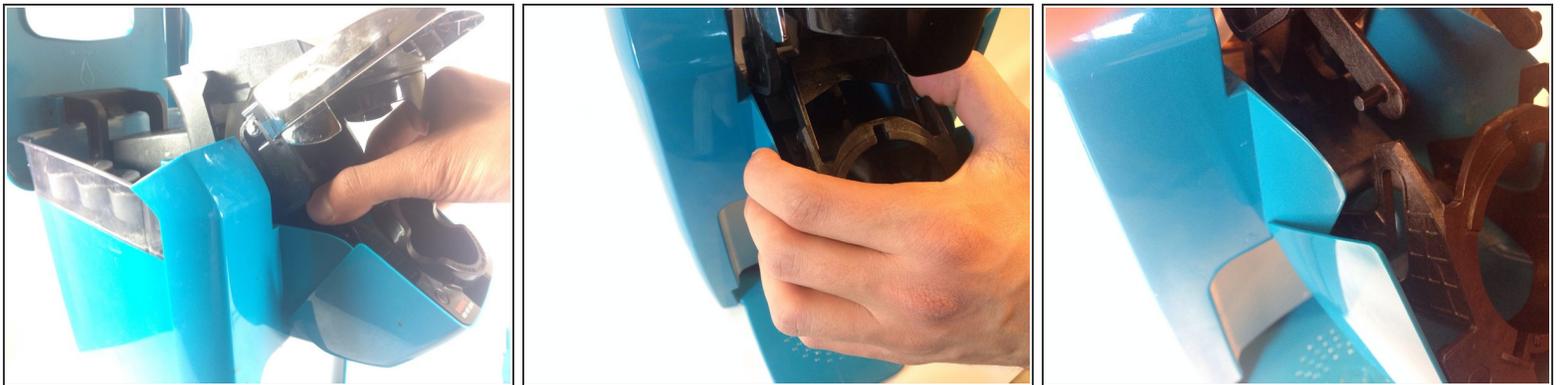


- Push in on one of the arms attached to the K-cup holder plastic housing to remove it from its rails. The arms are identical for both sides so once one side is free repeat the process for the second side.
- ⓘ The plastic is flexible and will not snap with the force applied.
- Once the arms are removed, the configuration should look like the picture. The K-cup holder housing should be separated from the arms.

### Step 3

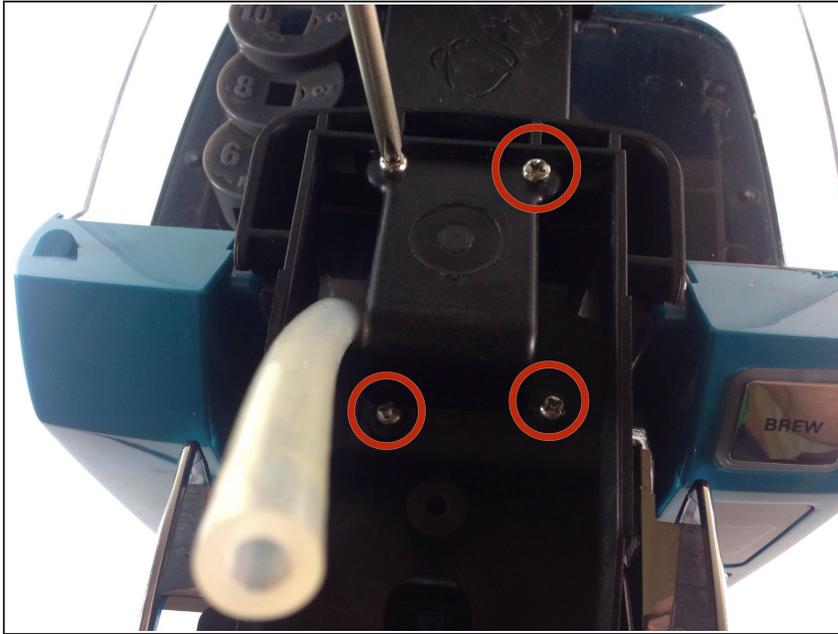

- Use a Phillips #1 screw driver to remove the four 12 mm screws that hold the arm assembly in place.

### Step 4

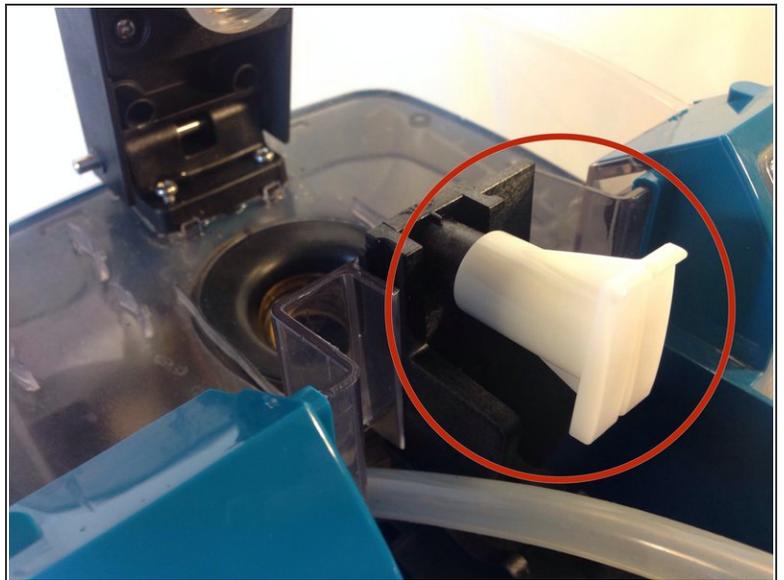

- Lift up the arm and pull up the handle assembly. It should easily come off.
- This white tab falls off easily, remove it and set it aside to ensure it is not lost.

To reassemble your device, follow these instructions in reverse order.