




# Dell Latitude X300 Screen Replacement

This will guide will explain the steps required to replace the Dell Latitude X300 screen.


Written By: Jacob

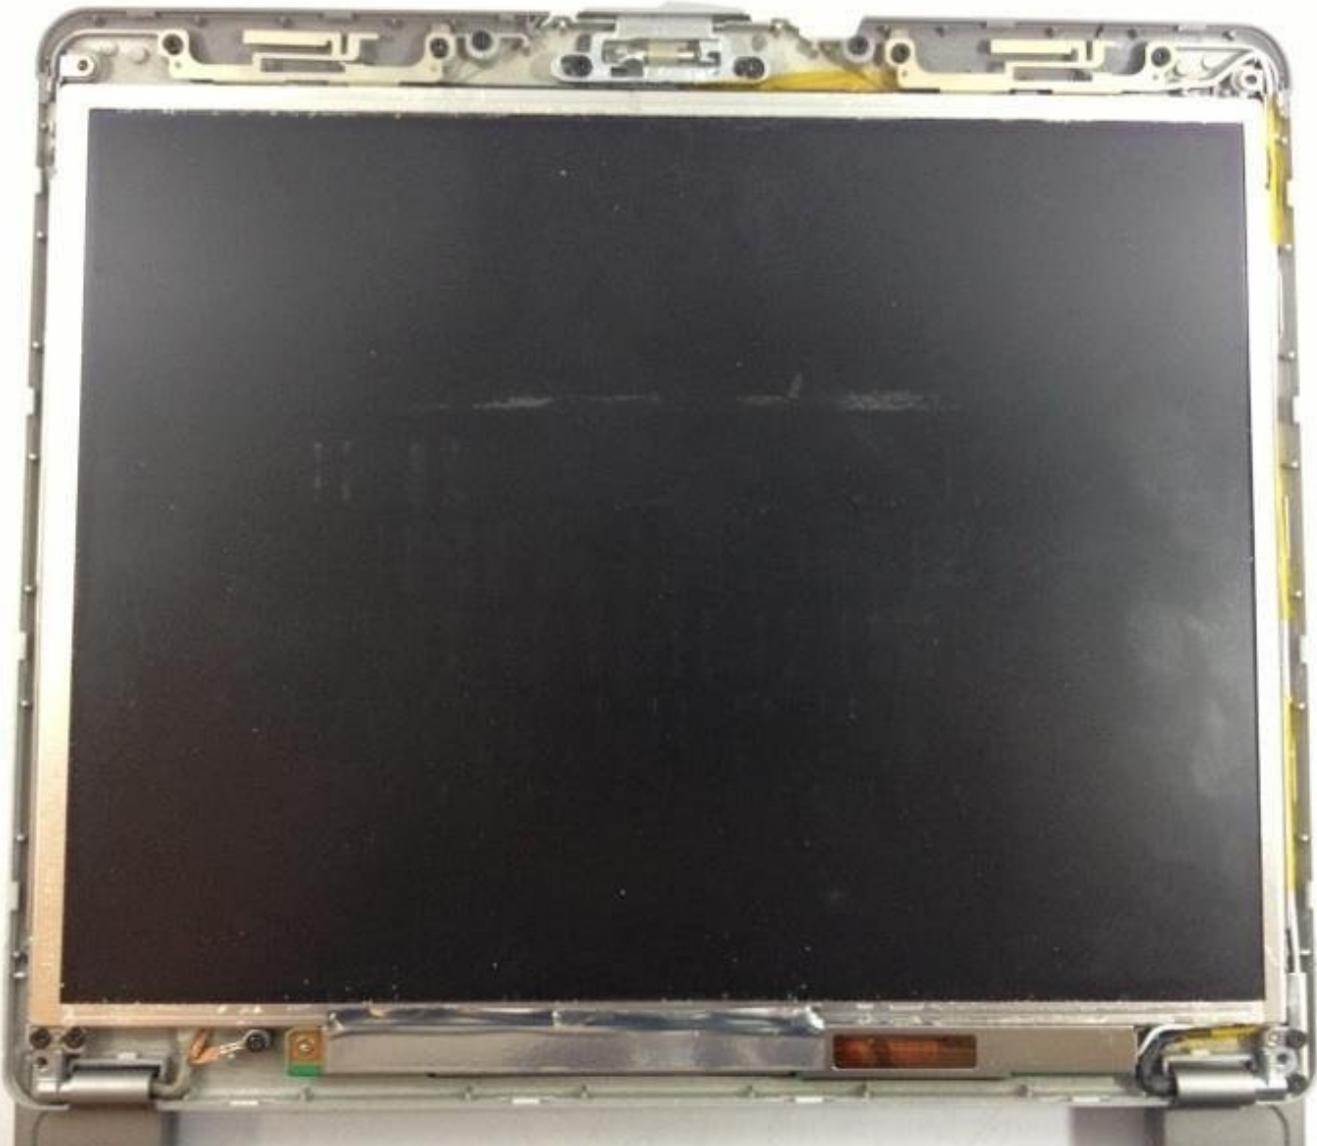

 **TOOLS:**

- [Phillips #0 Screwdriver](#) (1)
-

## Step 1 — Screen

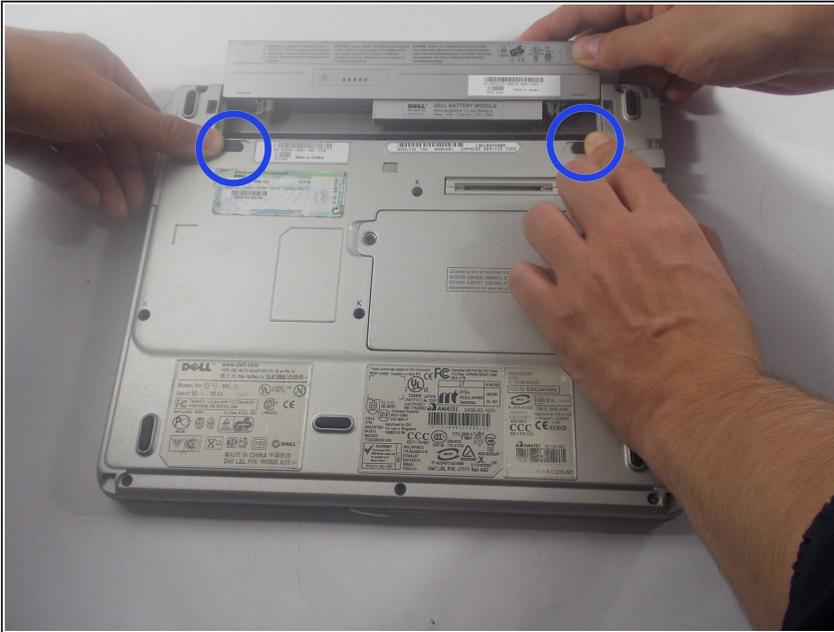

- Make sure the Dell Latitude X300 power is off.
- Remove the battery located on the bottom of the device by pushing in both clips.

## Step 2



- ① Remove rubber caps on each corner of the front screen with a pinch.
- Remove the 4 mm screws located on the front screen of the laptop.


### Step 3



- Carefully, remove the screen casing using either your hands or a proper tool.

 The casing is very flimsy, so extreme care is required.

### Step 4

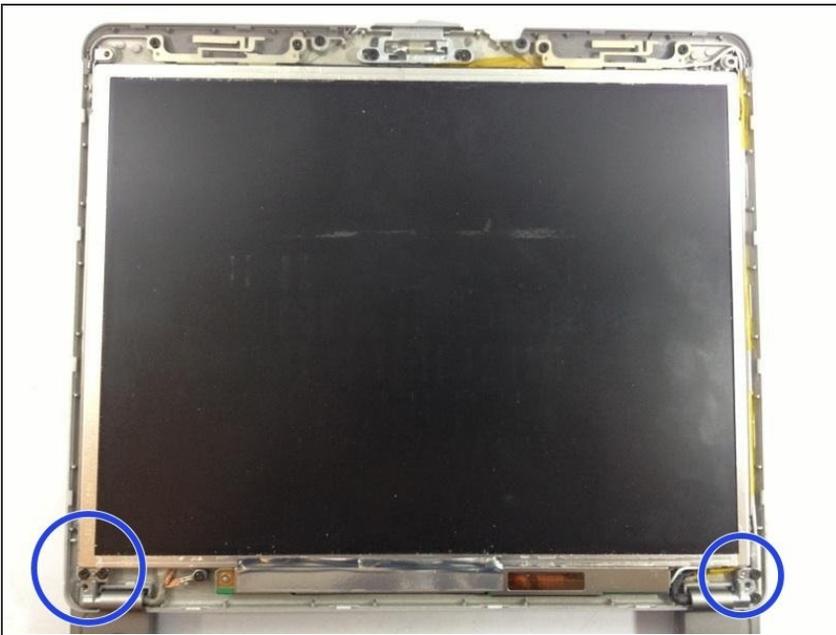

- Remove the 4 mm screws on the bottom left and bottom right corner of the screen.

## Step 5



- Carefully lift the screen and place it on its face.
- Disconnect the wiring attached to the screen.

⚠ It is important not to damage this wire.

To reassemble your device, follow these instructions in reverse order.