



Nokia N900 Slider Assembly Replacement

In this guide, I will show you how to replace the slider assembly of your device if you have been having difficulties with opening your keyboard.

Written By: Troy Posey



 **TOOLS:**

- [Pro Tech Toolkit \(1\)](#)
-

Step 1 — Slider Assembly



- Turn the phone over so the screen is face down.

Step 2




- Remove the back cover by locating the slit on the bottom of the phone and lifting up.

Step 3




- Remove the battery by lifting it out of the device.

Step 4

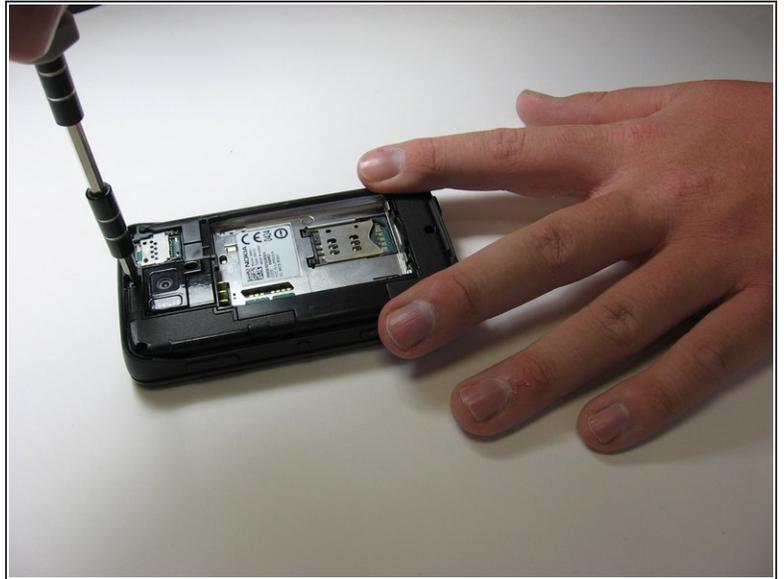

- Remove the two "L-shaped" antennas by unscrewing the following screws:
 - Four screw *M1 .4x5.0*
 - Two screw *RF1 .4x4*
- In addition to unscrewing the screws, remove the B-Cover (which will fall right out without the screws).

Step 5

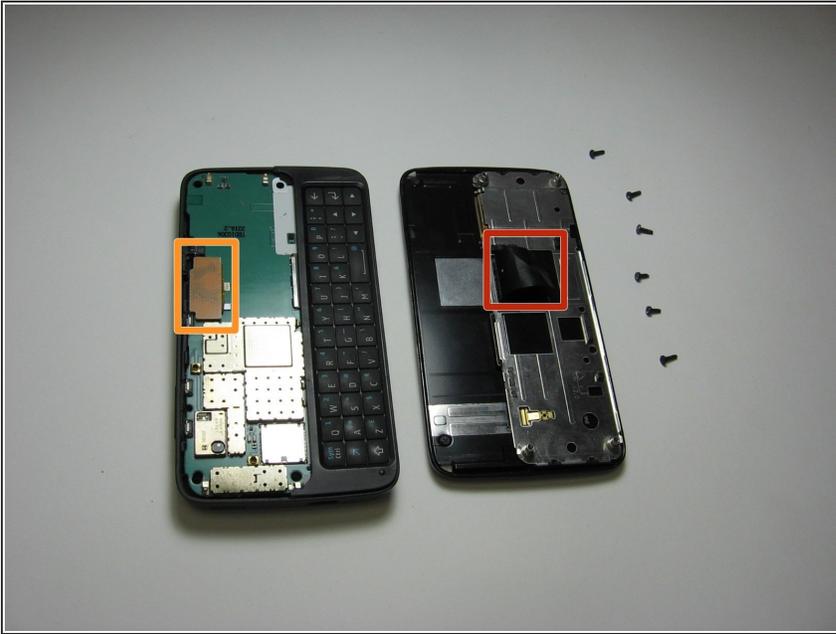

- Turn the back of the phone over so the keyboard is face up. You should then have two halves of the phone.
- To locate the slider, find the "black tape" on the screen half of the phone.
- Weave the "slider tape" through the orange slot on the keyboard half of the phone.
- Once you have completed these steps your phone should be able to slide up and down with ease.

To reassemble your device, follow these instructions in reverse order.