



# Samsung Captivate Glide Motherboard Replacement

How to remove the motherboard of a Samsung...

Written By: Nicholas Mira



# INTRODUCTION

How to remove the motherboard of a Samsung Captivate Glide.


## TOOLS:

[iFixit Opening Tool](#) (1)

[Phillips #00 Screwdriver](#) (1)

[Tweezers](#) (1)

## Step 1 — Motherboard

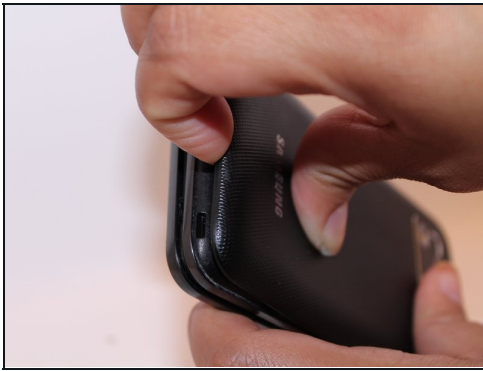

- Remove back cover using fingernail or plastic opening tool. The cover pulls up and off.

## Step 2



- Remove battery with plastic opening tool or finger.

### Step 3



- Remove the seven screws from backplate using the #00 screwdriver.

### Step 4



- Remove the back plate using the plastic opening tool.
  - There is a lip on each side, and both must be pried up.
- ① You can work your way around the edges after prying the two sides.




## Step 5



- Use the plastic opening tool to detach the two tabs connecting the motherboard to the base of the phone.

## Step 6

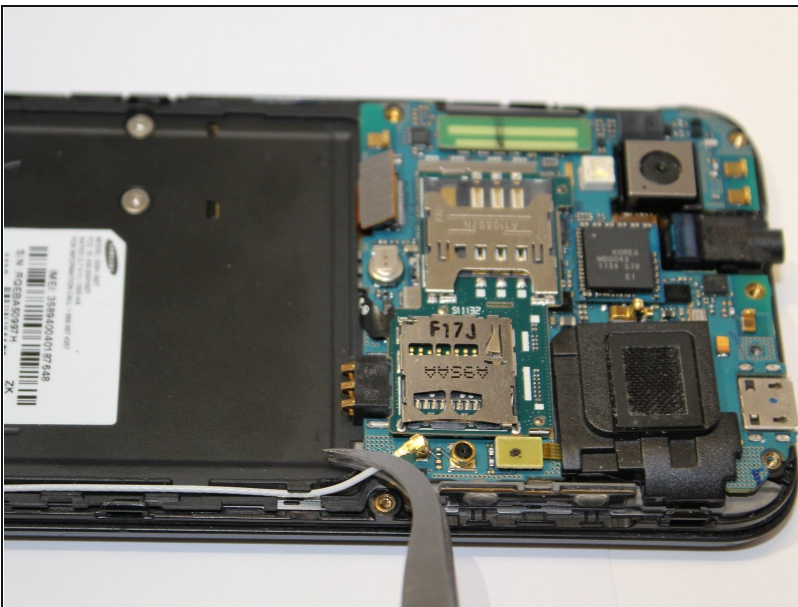

- Disconnect the antenna cable from the motherboard using [tweezers](#).

## Step 7



- Remove the single screw connecting the motherboard to the base of the phone by using the #00 Phillips screwdriver.

## Step 8



- Lift the motherboard out of the base of the phone.

To reassemble your device, follow these instructions in reverse order.