

iPad Mini 3 Left Antenna Cable Replacement

Prereq to peel the left antenna cable more.

Written By: Sam Goldheart



INTRODUCTION

Prereq only.



TOOLS:

- Tweezers (1)
- iFixit Opening Tools (1)

Step 1 — Left Antenna Cable








- Pull the wide tape toward the battery, applying constant force to peel it from the antenna cable lodged between it and the speaker.
- Insert a plastic opening tool into the gap between the wide tape and the antenna cable, to break the adhesive connecting the two.
- Slide the plastic opening tool along the length of the antenna cable to completely separate it from the piece of tape.

Step 2








Lift the antenna cable tape up from behind the right speaker.

Step 3

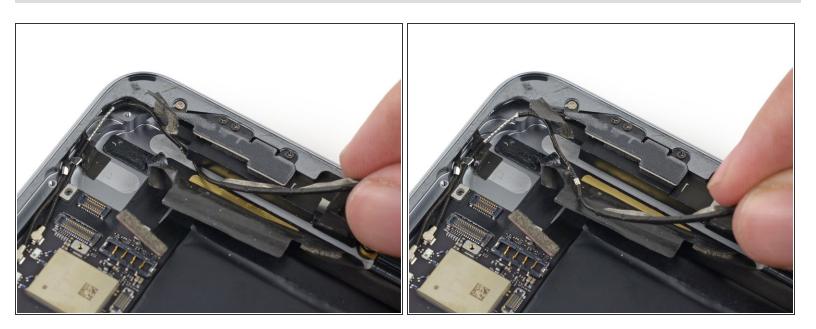

Pull the antenna cable out from under the corner of the right speaker.

To reassemble your device, follow these instructions in reverse order.