




Garmin Approach S2 Water Proof Gasket Replacement

This is a guide to replace the Water Proof Gasket.

Written By: dengweiyuan931226

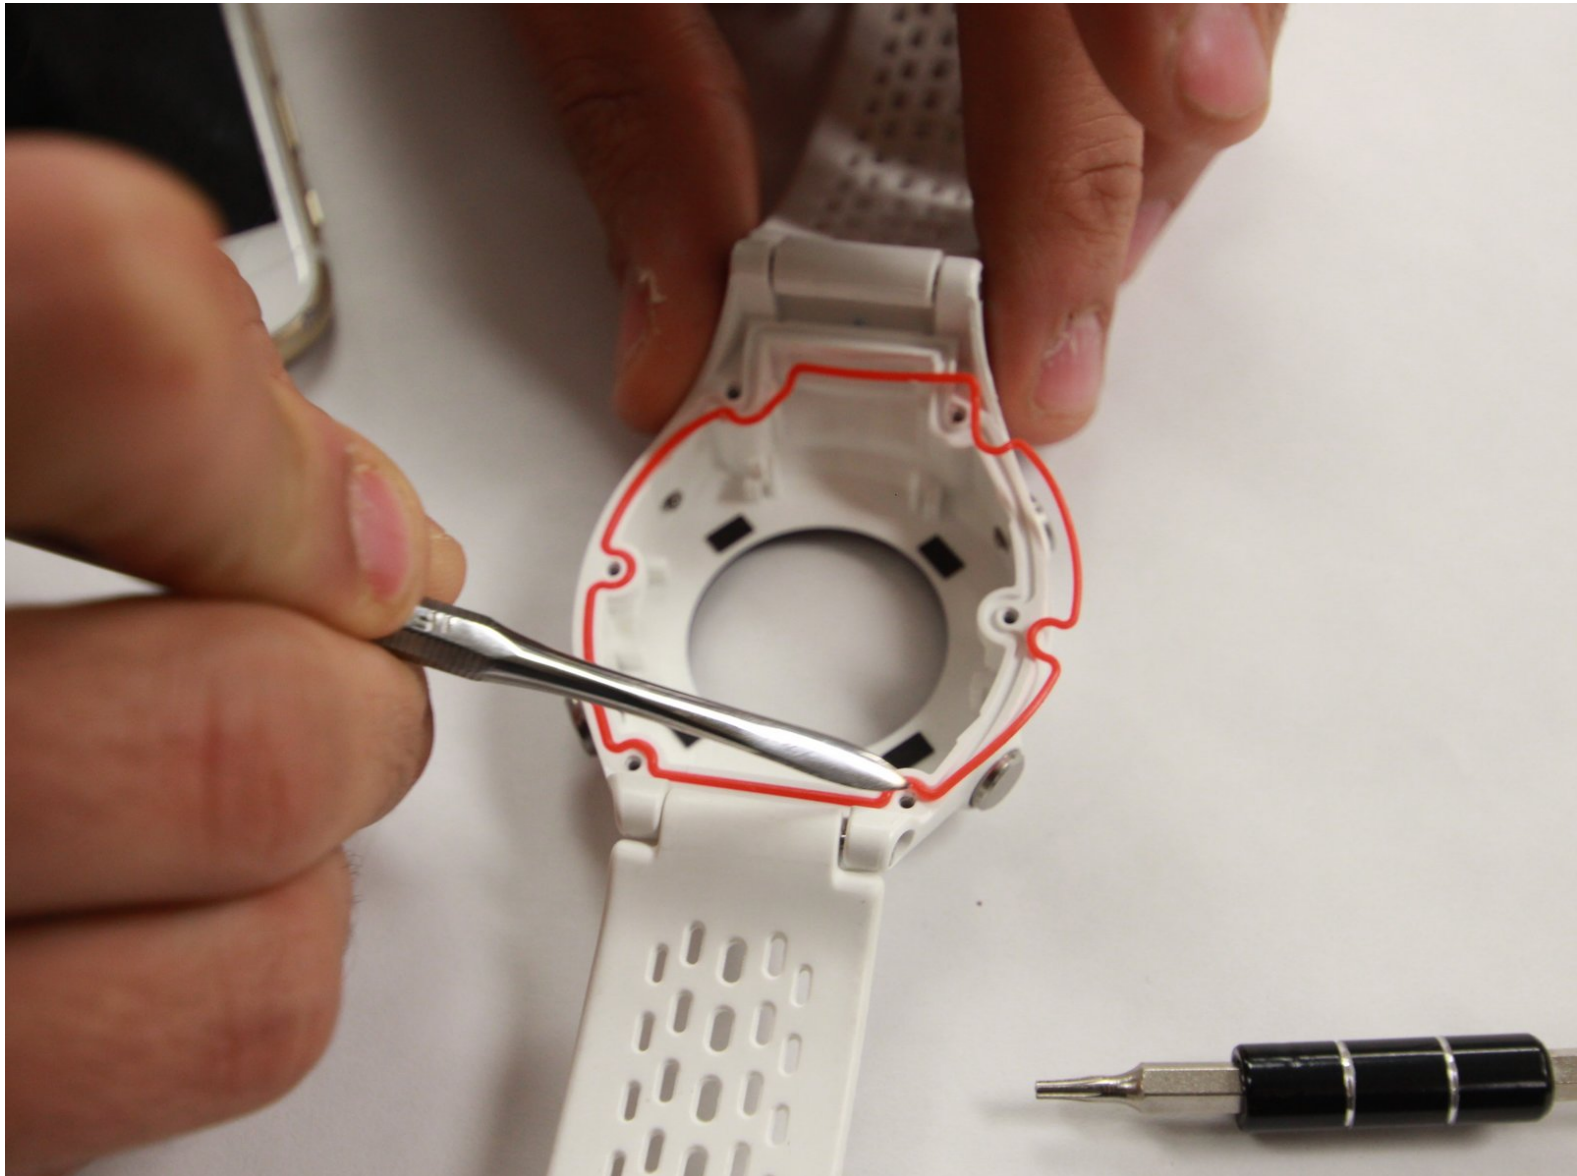

INTRODUCTION


This is a short guide, but take note that the gasket will want to sit a certain way upon the groove.



TOOLS:


- [T5 Torx Screwdriver](#) (1)
-

Step 1 — Back Cover

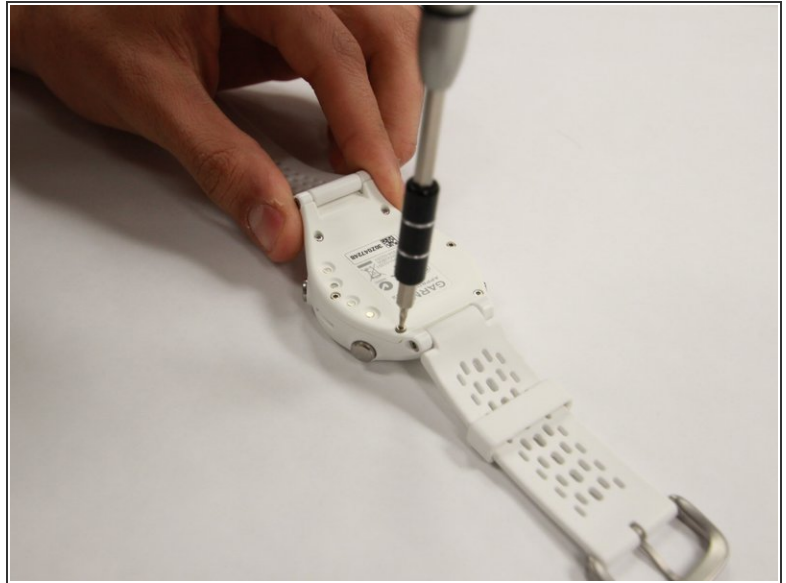


- Remove the six T5 Torx 6.32mm screws securing the back cover to the watch.

Step 2

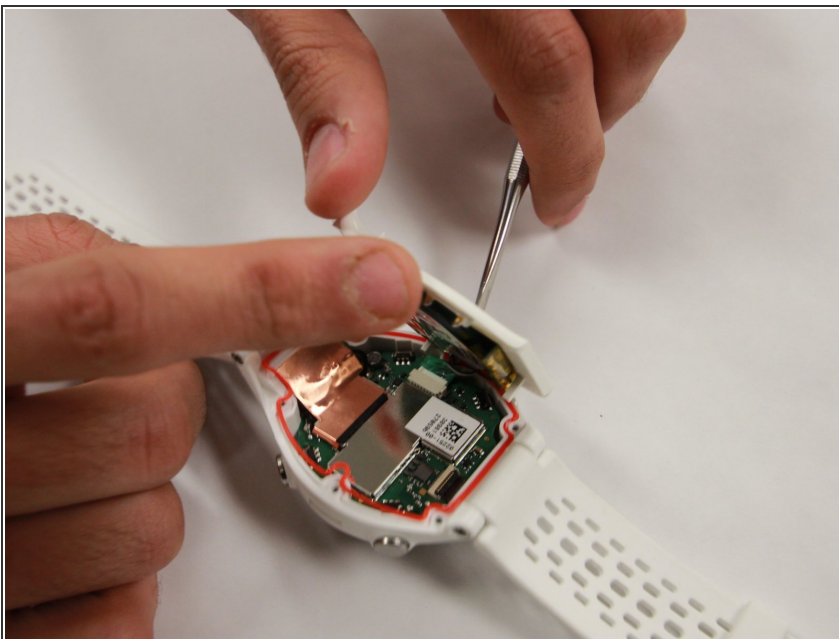

- Remove the back cover carefully.
- ⓘ Even after the screws have been removed, the back cover can still be quite difficult to take off. Moderate to extensive prying may be required. Be gentle, but *firm*.

Step 3 — Water Proof Gasket

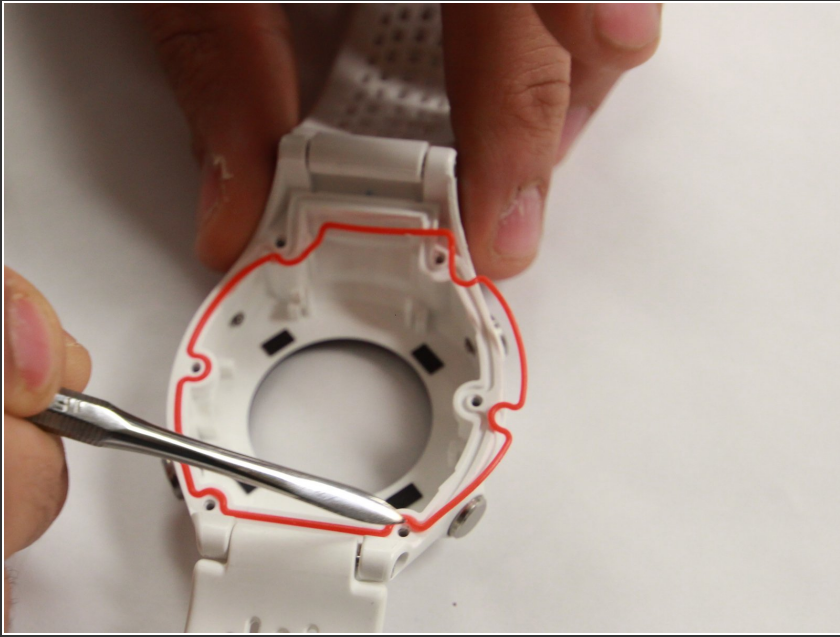

- Remove the orange gasket.

To reassemble your device, follow these instructions in reverse order.