



Samsung Moment Camera Replacement

This guide will show users how to remove and replace their phone's camera.

Written By: Steven Cooney



INTRODUCTION

This guide will show users how to remove their phone's back cover, exposing many of the inside parts. It will then show readers how to replace a faulty camera.



TOOLS:

- [Phillips #000 Screwdriver](#) (1)
 - [Spudger](#) (1)
-

Step 1 — Battery



- Slide the back cover off the back of the phone to reveal the battery.

Step 2



- Place a finger in one or both of the indents by the bottom of the battery. Then pull out to remove the battery from the phone.

Step 3 — Samsung Moment Rear Case Disassembly



- Identify and remove the 6 screws on the rear case of the phone.

Step 4



- Using a spudger, separate the rear case of the phone from the front case.

Step 5 — Camera




- Identify the phone's camera piece

Step 6



- Use a spudger to peel back the green processing chip, exposing the wires underneath. Identify the thin golden band which connects the camera to the rest of the phone.

Step 7

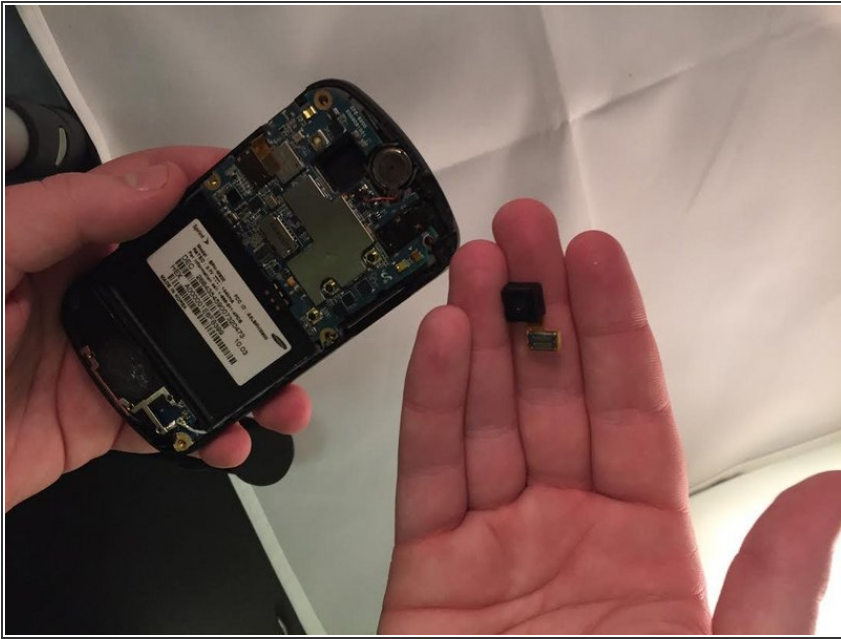

- Using the spudger, separate the golden band from its resting dock. It should come apart fairly easily, like undoing a bit of velcro. Once separated, the camera should slide out.

To reassemble your device, follow these instructions in reverse order.