



Blackberry Bold 9650 Back Chassis Replacement

Written By: Ryan



**TOOLS:**

- [T6 Torx Screwdriver](#) (1)
- [Spudger](#) (1)

**PARTS:**

- [Blackberry Bold 9650 Back Chassis](#) (1)

Step 1 — Battery




- Turn the device upside down.
- Using your finger, slide the silver cover release button towards the top of the device.
- Lift and remove the back cover.

Step 2



- Using your fingernails, lift the sides of the battery.
- Remove the battery.

Step 3 — SIM Card

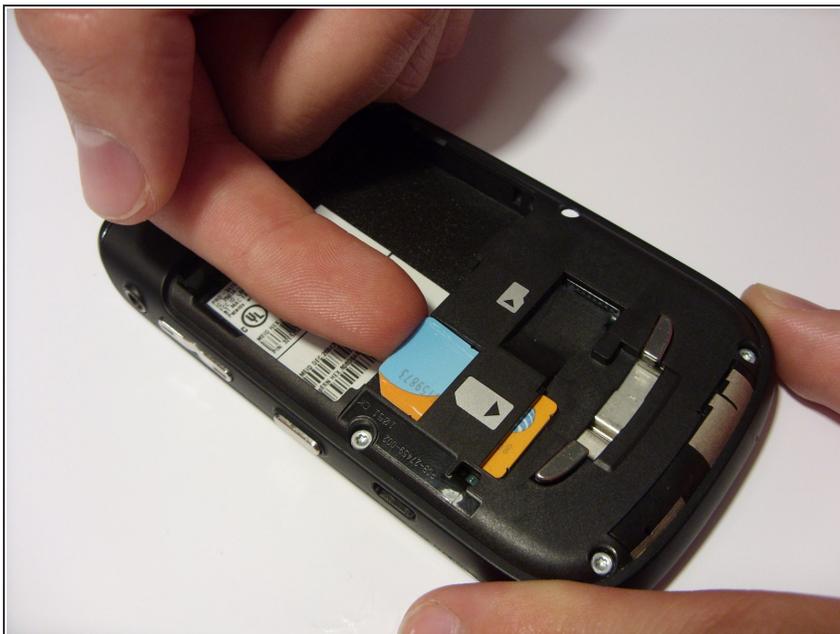


- Orient the device so that the screen is facing the ground.
- Using your finger, gently lift the top of the SIM card.

Step 4



- Gently pull out the SIM card.
- ⚠ The card will break in half if you apply too much force when pulling out the card.**

Step 5 — Back Chassis

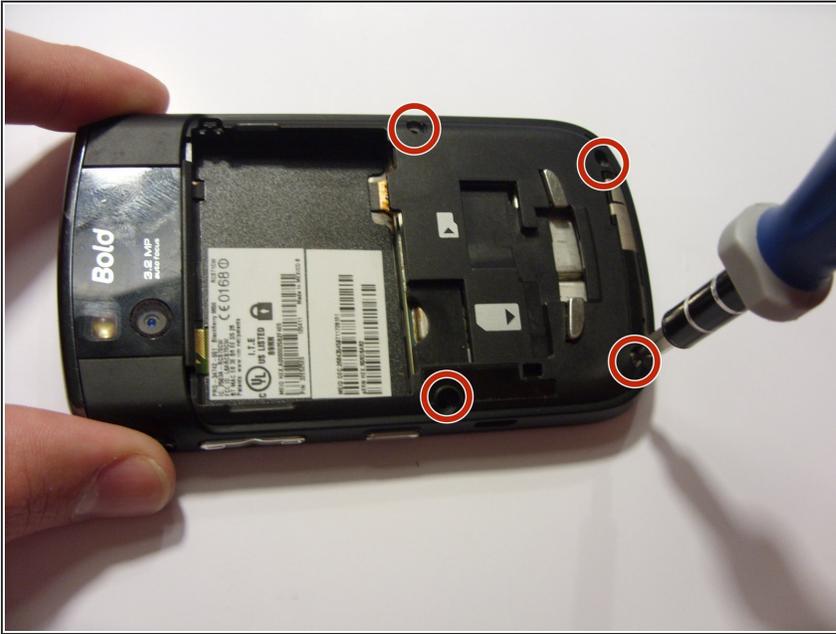

- Using a T6 Torx screwdriver, remove the four screws from the bottom half of the device.

Step 6



- Orient the device so that the screen is facing you.
- Using a spudger, remove the ear piece cover.

Step 7



- Using a T6 Torx screwdriver, remove the two screws from the top corners of the device.

Step 8



- Remove the back chassis by gently pulling the chassis back and forth.
- ⚠ The headphone jack can break if the chassis is pulled too forcefully.

To reassemble your device, follow these instructions in reverse order.