




# Motorola Moto G4 Plus Volume Buttons Replacement

This guide will walk you through the process of...

Written By: Sami Taha

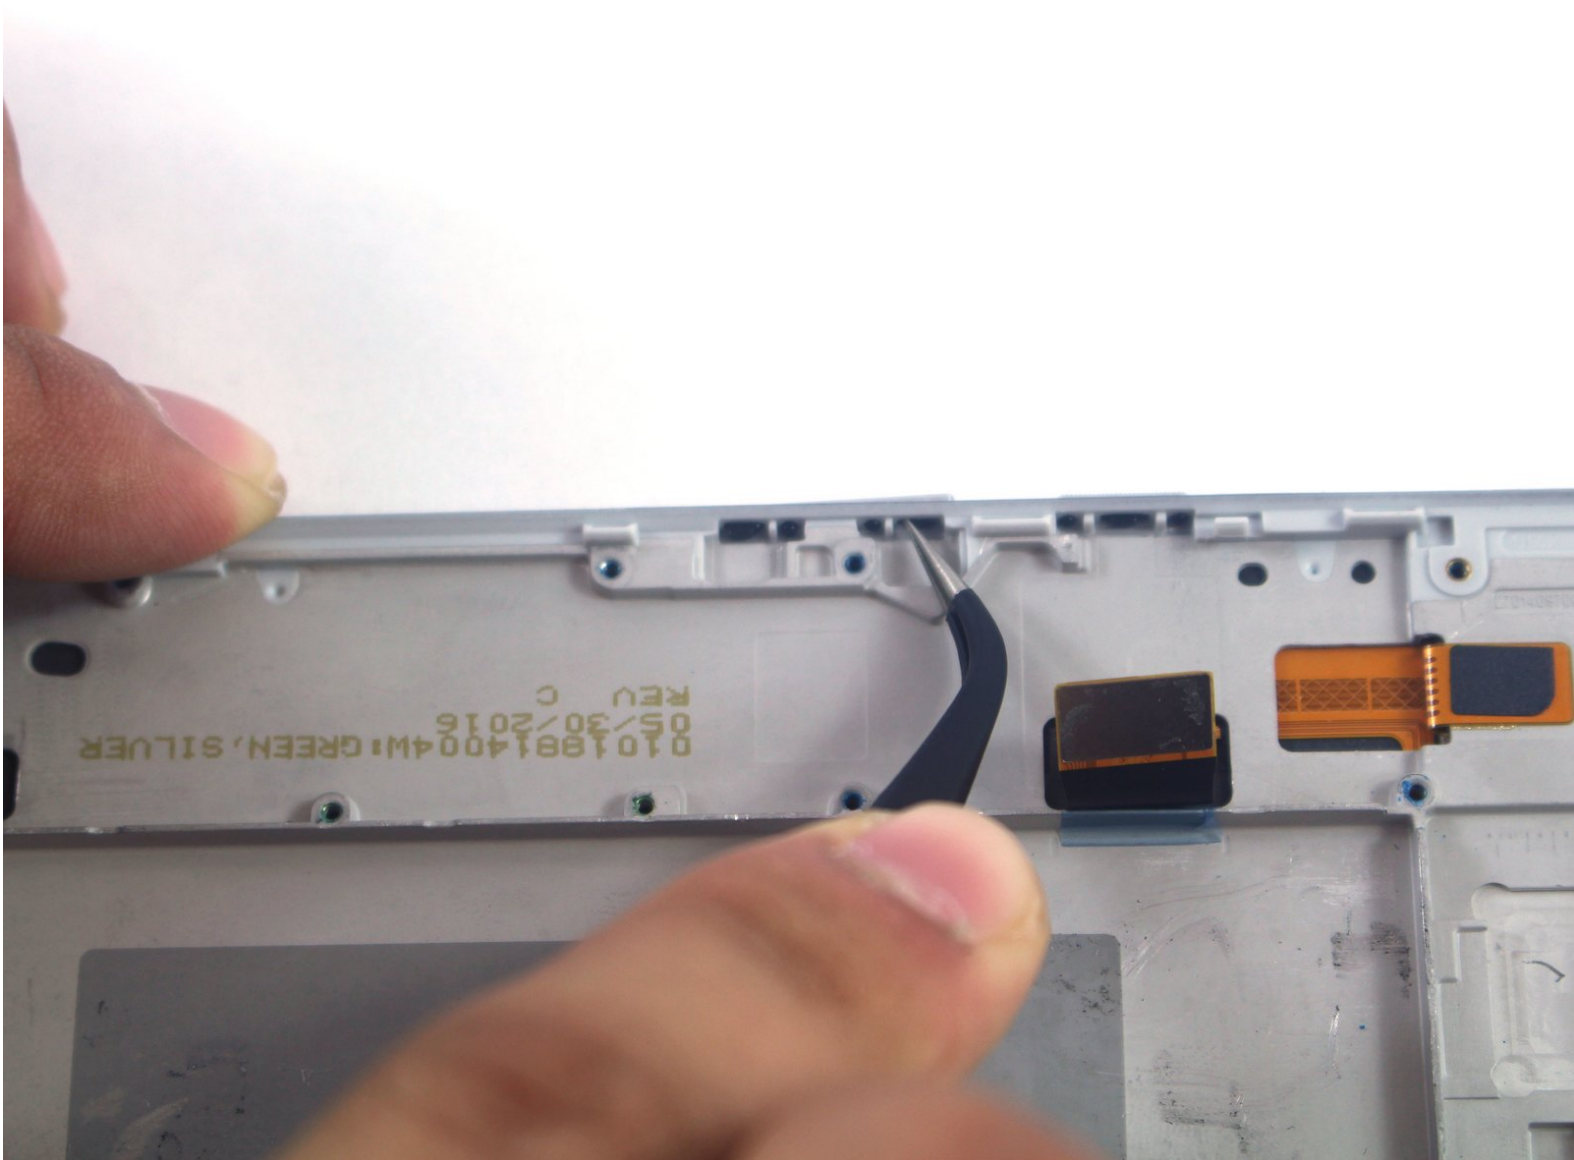

## INTRODUCTION

This guide will walk you through the process of replacing the volume buttons in a Motorola Moto G4 Plus phone.

Before you begin, download the [Rescue and Smart Assistant](#) app to backup your device and diagnose whether your problem is software or hardware related.



### TOOLS:


- [Spudger](#) (1)
- [Tweezers](#) (1)
- [T3 Torx Screwdriver](#) (1)



### PARTS:

- [Moto G4 Plus Power & Volume Buttton Replacement](#) (1)


## Step 1 — SIM Card

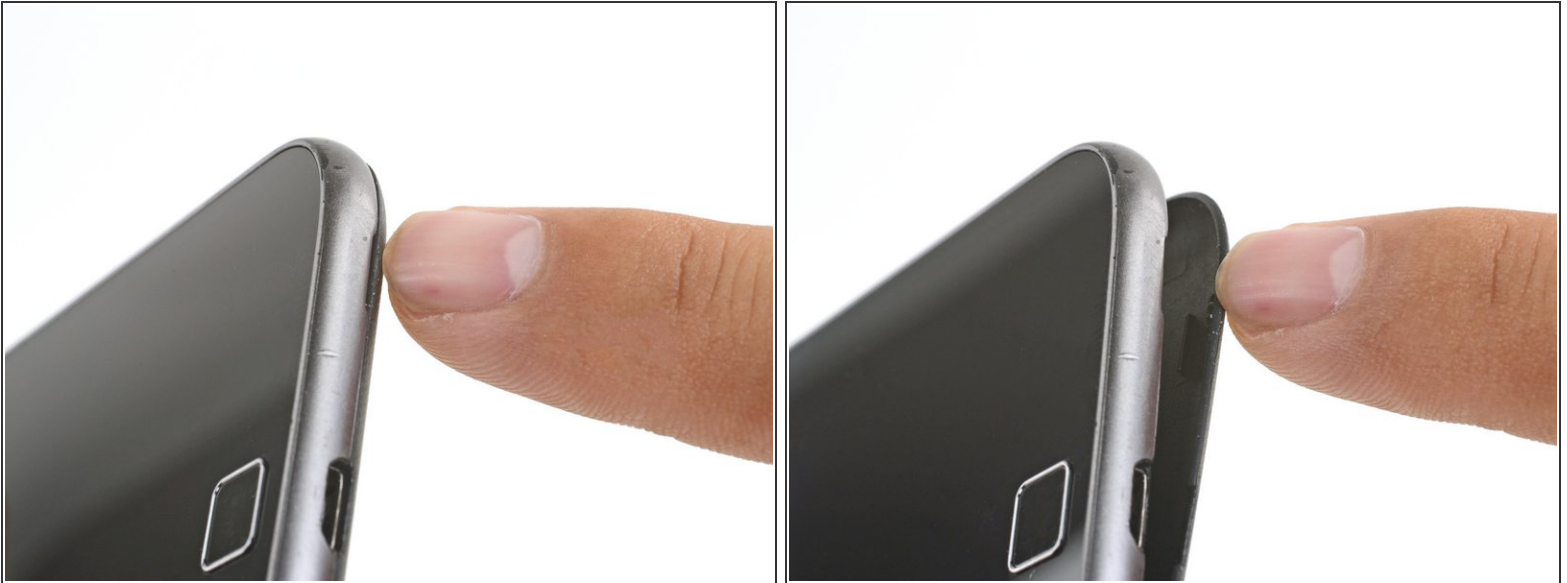

- Insert a fingernail or a spudger into the notch on bottom edge of the phone near the charging port.
- Pry the back cover away from the body of the phone.

## Step 2



- Continue to gently lift the back cover until all plastic clips have been released.
  - Remove the back cover.
-  To reinstall the back cover, align the cover over the body and gently press all around the edges until you feel the clips snap into place.

## Step 3



- Slide out and remove the SIM card.

## Step 4 — Battery



- Remove the nineteen 3.1 mm T3 screws securing the midframe.



## Step 5



- Use the point of a spudger to pry up the rubber cover over the camera flash connector.
- Remove the rubber cover.

## Step 6





- Use the point of a spudger to pry up and disconnect the camera flash connector.

## Step 7



- Loosen the midframe along the edges and lift it away from the body.
- Remove the midframe.

## Step 8

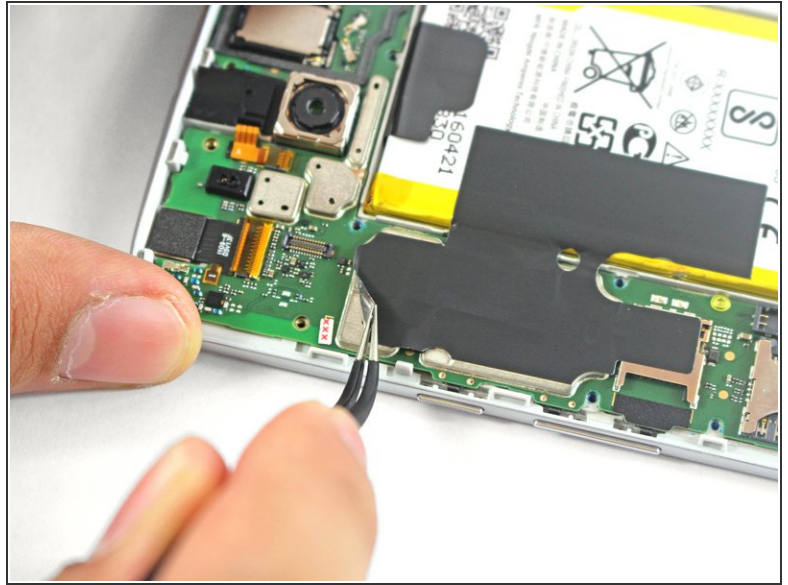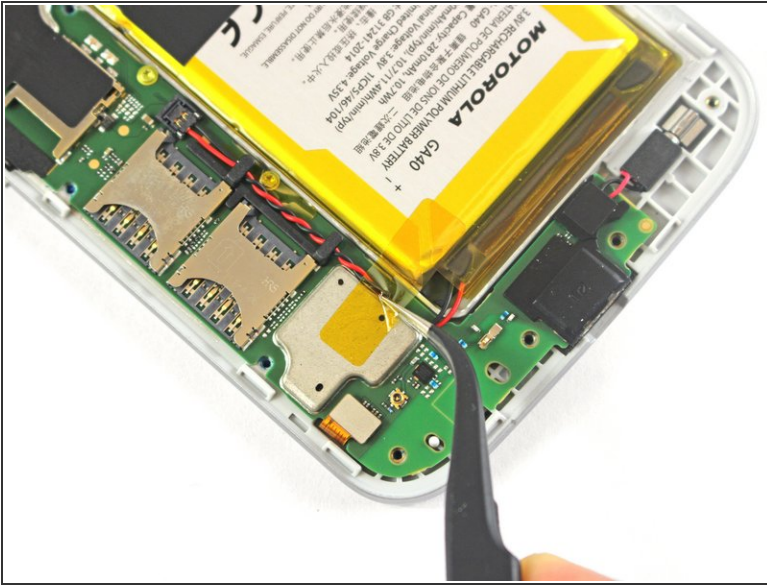


**⚠ Be very careful not to puncture the battery with any sharp tools. A damaged lithium-ion battery can catch fire and/or explode.**

- Peel up and remove the tape securing the battery wires.
- Peel up and remove the black tape that bridges the battery and the phone.
- ☑ While neither tape pieces are necessary for the operation of the phone, save them if they are in good condition for the reinstallation process.



## Step 9

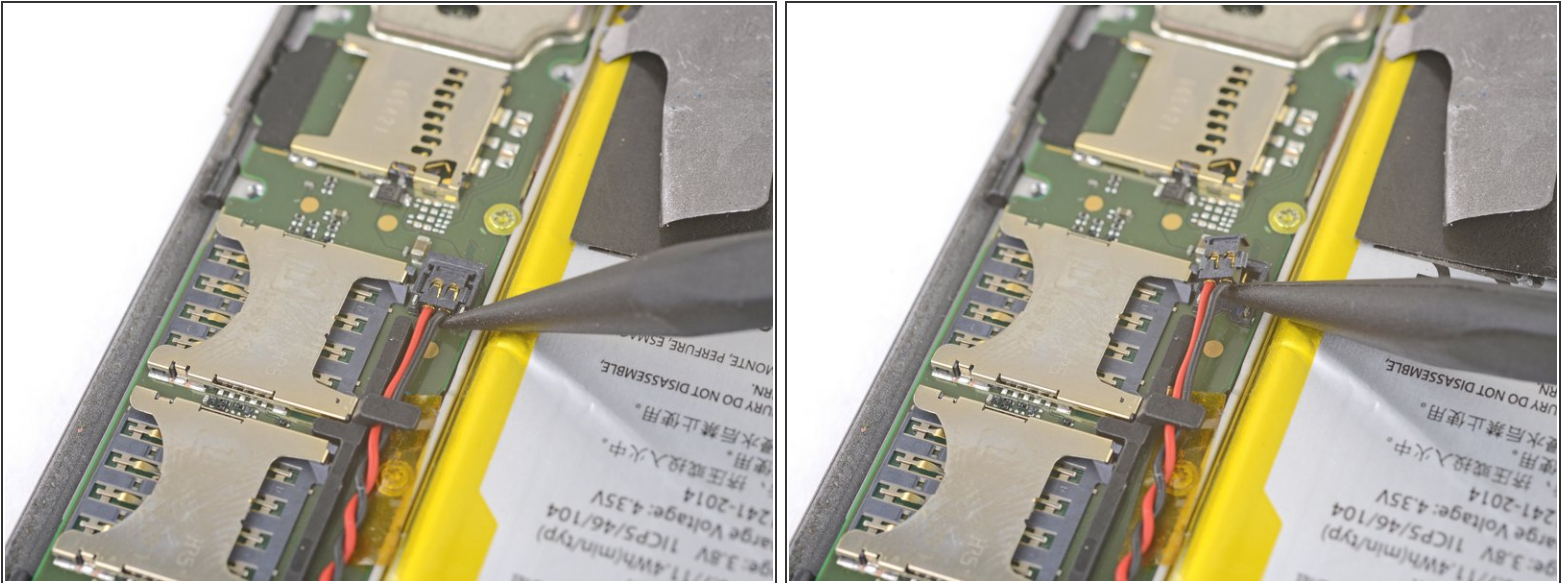


- Slip the point of a spudger underneath the red and black battery wires and gently **pry straight up**.

**⚠ Do not pull the plug out, or you will tear the board socket out. Be careful where you pry. Do not pry against the board socket.**

- 🔧 During reassembly, align the connector in its socket, then press straight down to reconnect it.



## Step 10

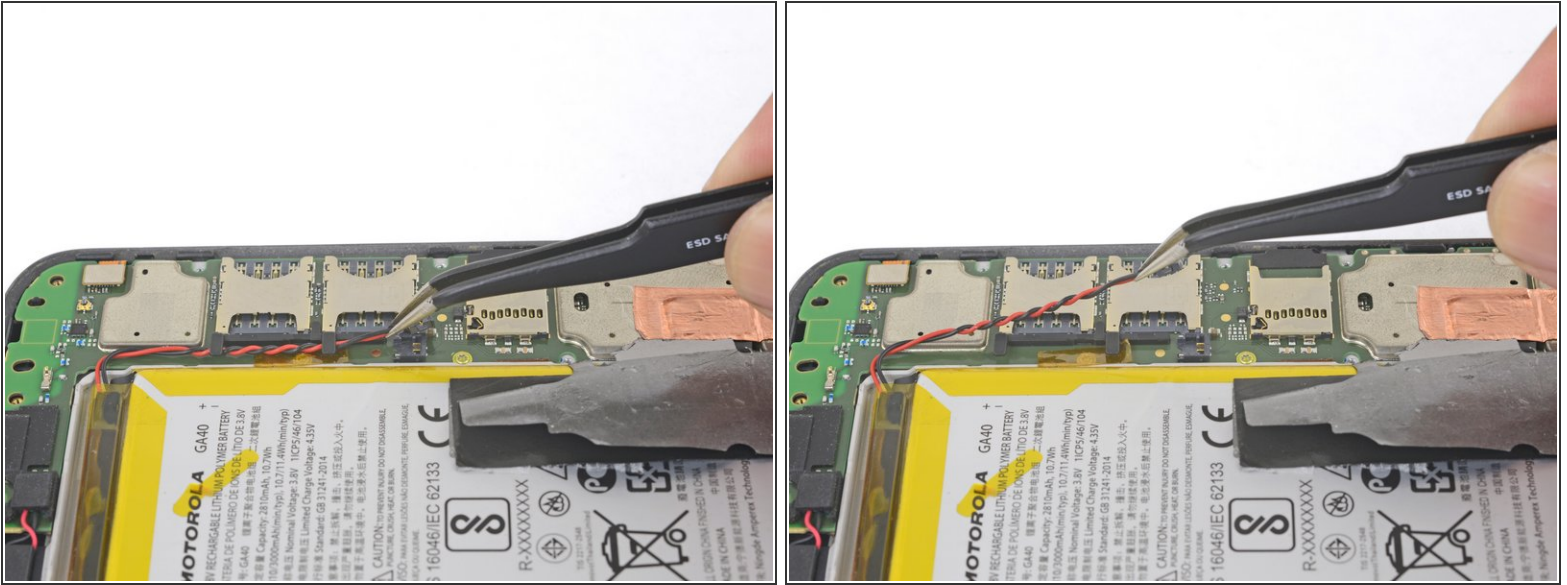

- Use tweezers or your fingers to de-route the battery wires from the plastic brackets.

## Step 11




- Peel the black pull tab from battery and pull slowly but firmly to separate the battery from the frame.
- ⓘ A few drops of high concentration (90% or higher) isopropyl alcohol along each side may help soften the adhesive.
- ⓘ If the pull tab breaks, use a spudger to gently pry around the edges of the battery until it comes loose.

⚠ Don't deform or puncture the battery—it can catch fire and/or explode if damaged.



⚠ Never reinstall a damaged or deformed battery. Replace the battery.

## Step 12

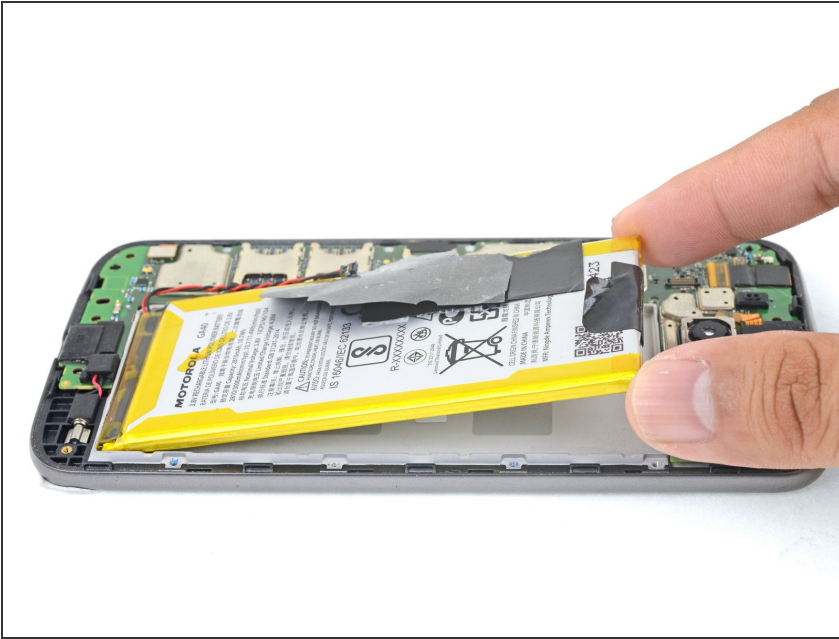

- Remove the battery.
- ★ To install a battery, orient the new battery such that the wires exit near the bottom of the phone, and the battery connector is on the motherboard side.
- ★ Clean off any adhesive residue which may prevent the battery from sitting flush against the frame. Use a few [strips of adhesive included in the battery kit](#) or some [double-sided tape](#) to secure the battery to the frame.


## Step 13 — Motherboard

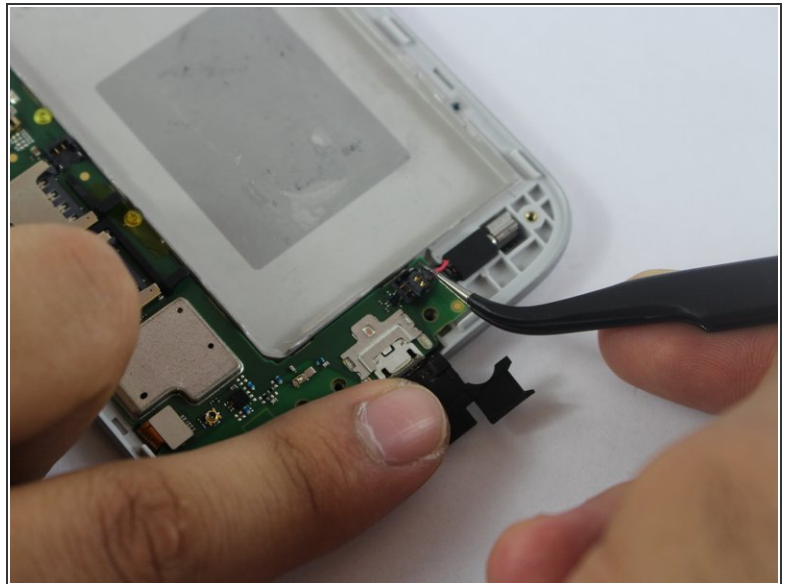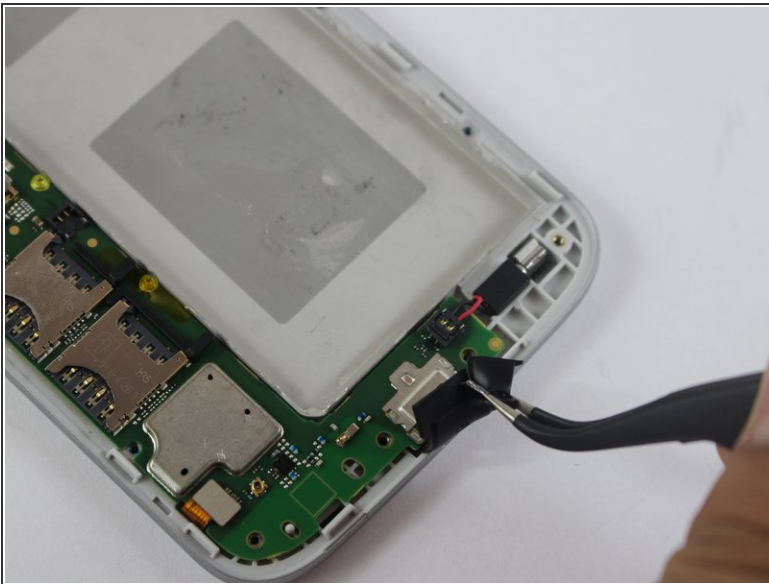

- Using tweezers, lift up the black silicon piece connecting the motherboard to the front casing.
- Using tweezers, remove the red and black cable connecting the motherboard to the front casing.



## Step 14

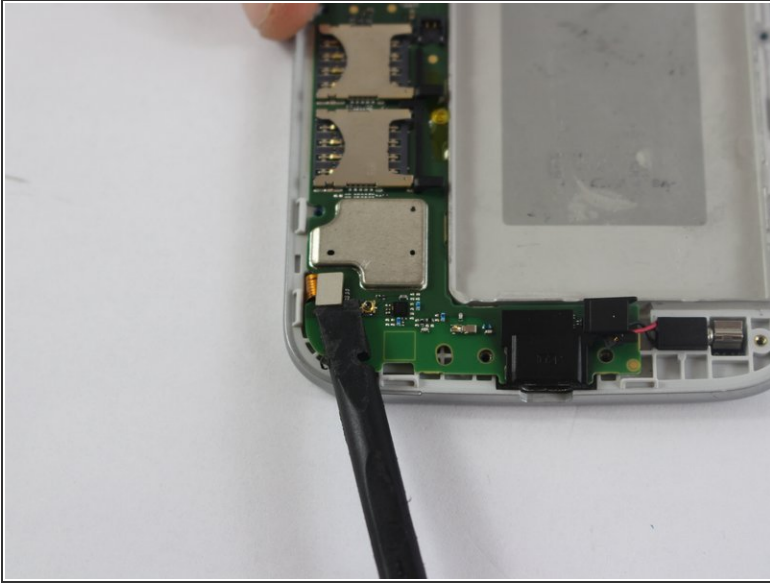

- Using a spudger, remove the two metal pieces connecting the motherboard to the front casing.


## Step 15



- Using tweezers, remove the yellow film connecting the rear camera to the motherboard.
- ⓘ The film is connected by an adhesive, so it may take some jostling to remove.



## Step 16

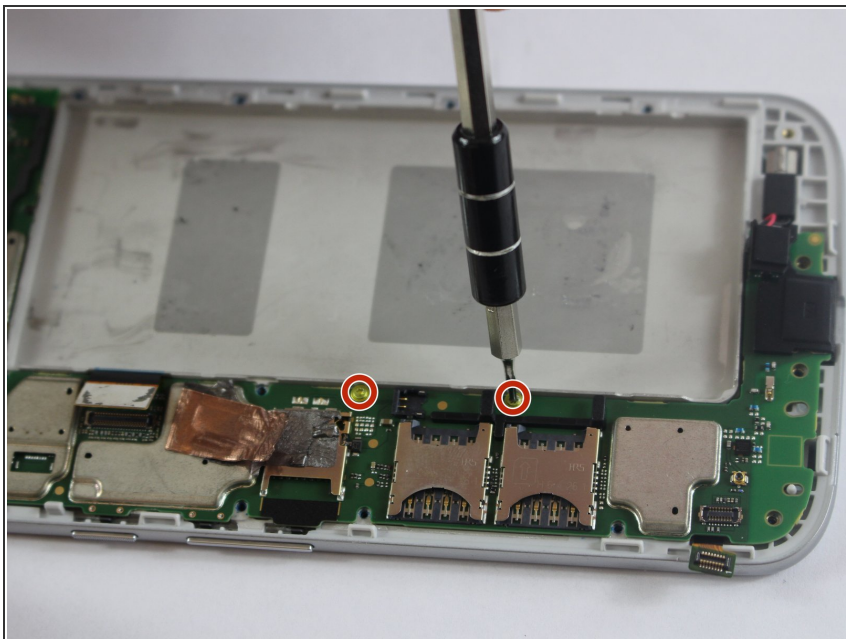


- Remove two 4.0 mm T3 Torx screws connecting the motherboard to the front casing.

## Step 17



- Using a spudger, lift up and remove the motherboard.

## Step 18 — Volume Buttons

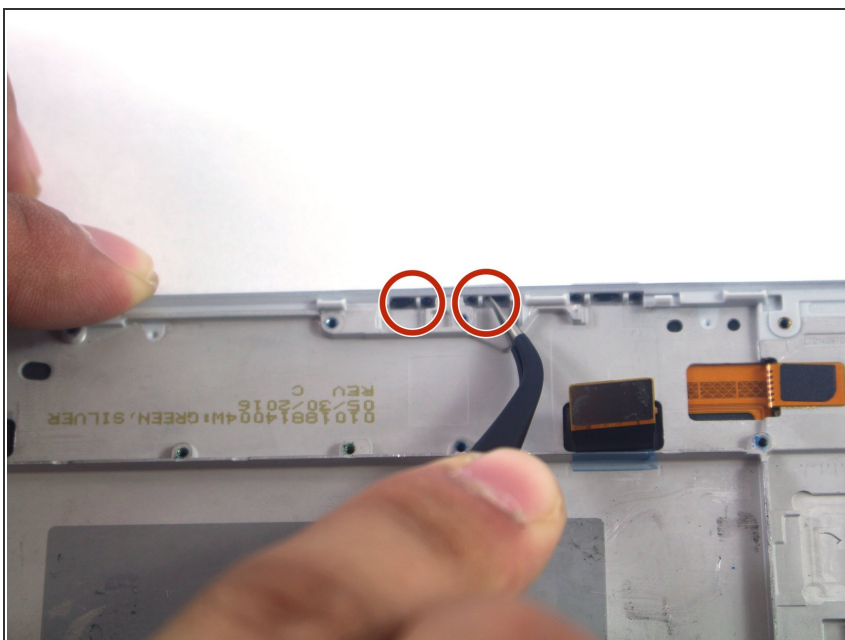

- Using tweezers, remove the volume buttons.

To reassemble your device, follow these instructions in reverse order.