



BLU Life X8 Back Camera Replacement

Replace the back camera of your BLU Life X8 because it cracked or got scratched

Written By: Alexander Prasil



INTRODUCTION


The back camera may become damaged or scratched over time, causing poor quality pictures. This guide will explain how to access, remove, and replace your BLU Life X8 back camera.



TOOLS:

- [Phillips #00 Screwdriver](#) (1)
 - [iFixit Opening Tools](#) (1)
 - [Tweezers](#) (1)
-

Step 1 — Battery

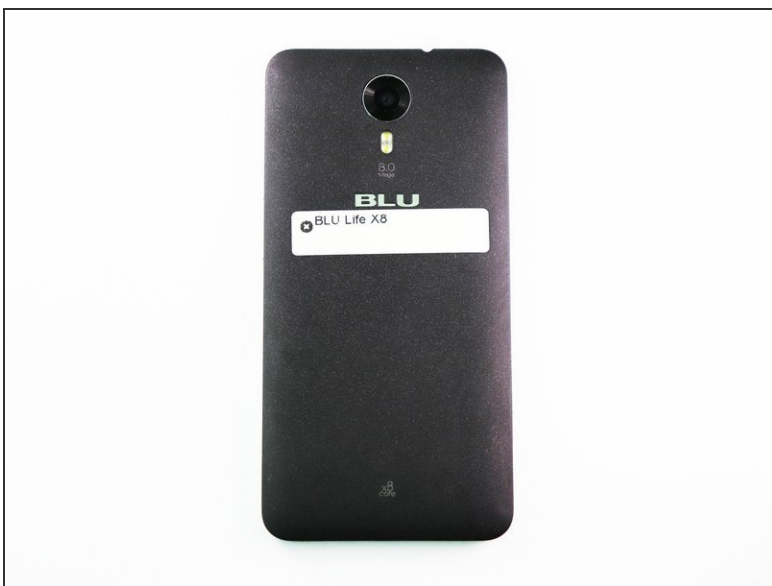

- Flip the phone over so that the screen is facing down.
- Slide the opening tool between the micro-USB port and the back cover.
- Use the opening tool to create a gap.

Step 2



- Use your thumb to pry off the back panel once the gap is large enough.

Step 3




- Once the back panel is off, locate the indent at the bottom of the battery.
- Use your thumb to slip the battery out of the case.

Step 4 — Back Camera




- Use the Phillips #00 (1.5mm) bit to undo the (9) screws from the back of the device.

Step 5

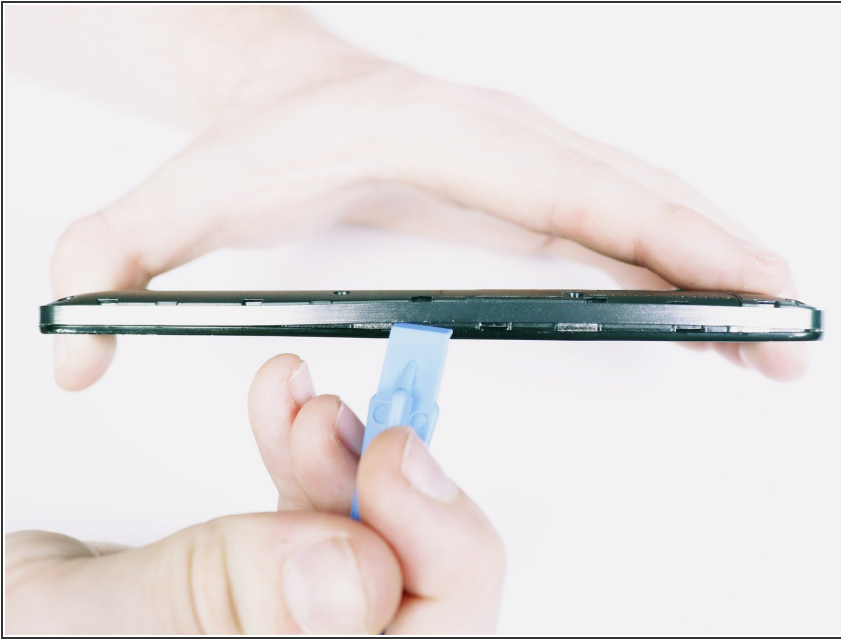

- Wedge the opening tool into the seam of between the screen and the gray frame.
- Run the opening tool along the seam to release the clips that hold the two pieces together.
- ❗ You may need to use the opening picks to prevent the clips from reengaging.

Step 6

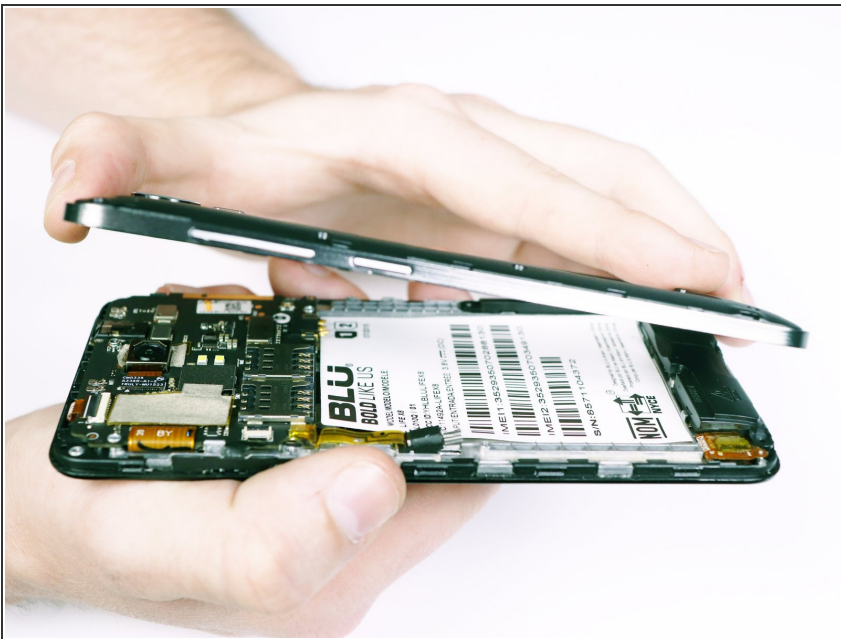


- Once all the clips have been released, pull back the frame and set it aside.

Step 7



- Use the tweezers to unlock the ribbon cable from the motherboard
- The ribbon cable should be free. Pull back on the ribbons to release it from the connector

Step 8

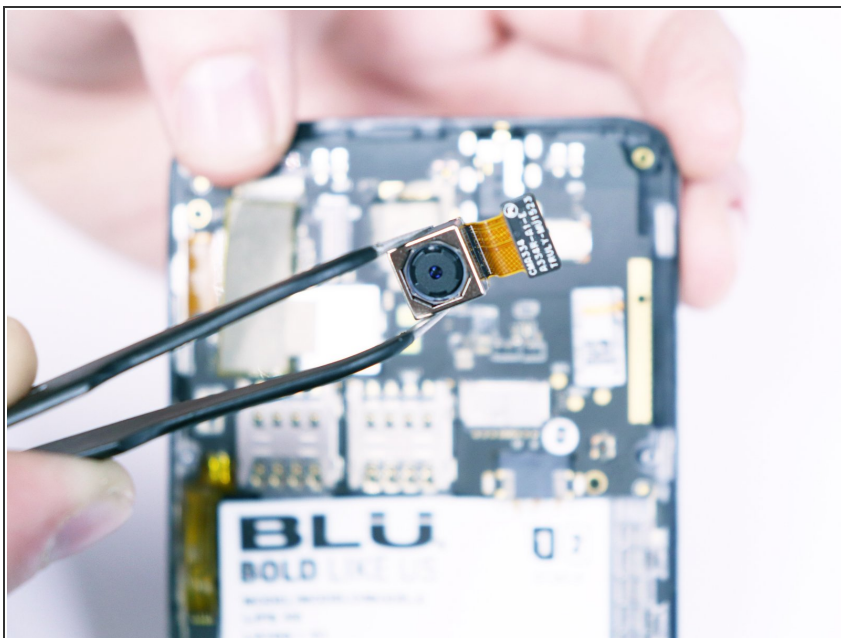

- Lift the back camera from its housing
- ⓘ The back camera may be glued to the phone

To reassemble your device, follow these instructions in reverse order.