




Dell Vostro 5560 Memory Module Replacement


Written By: Johnathan Hammond

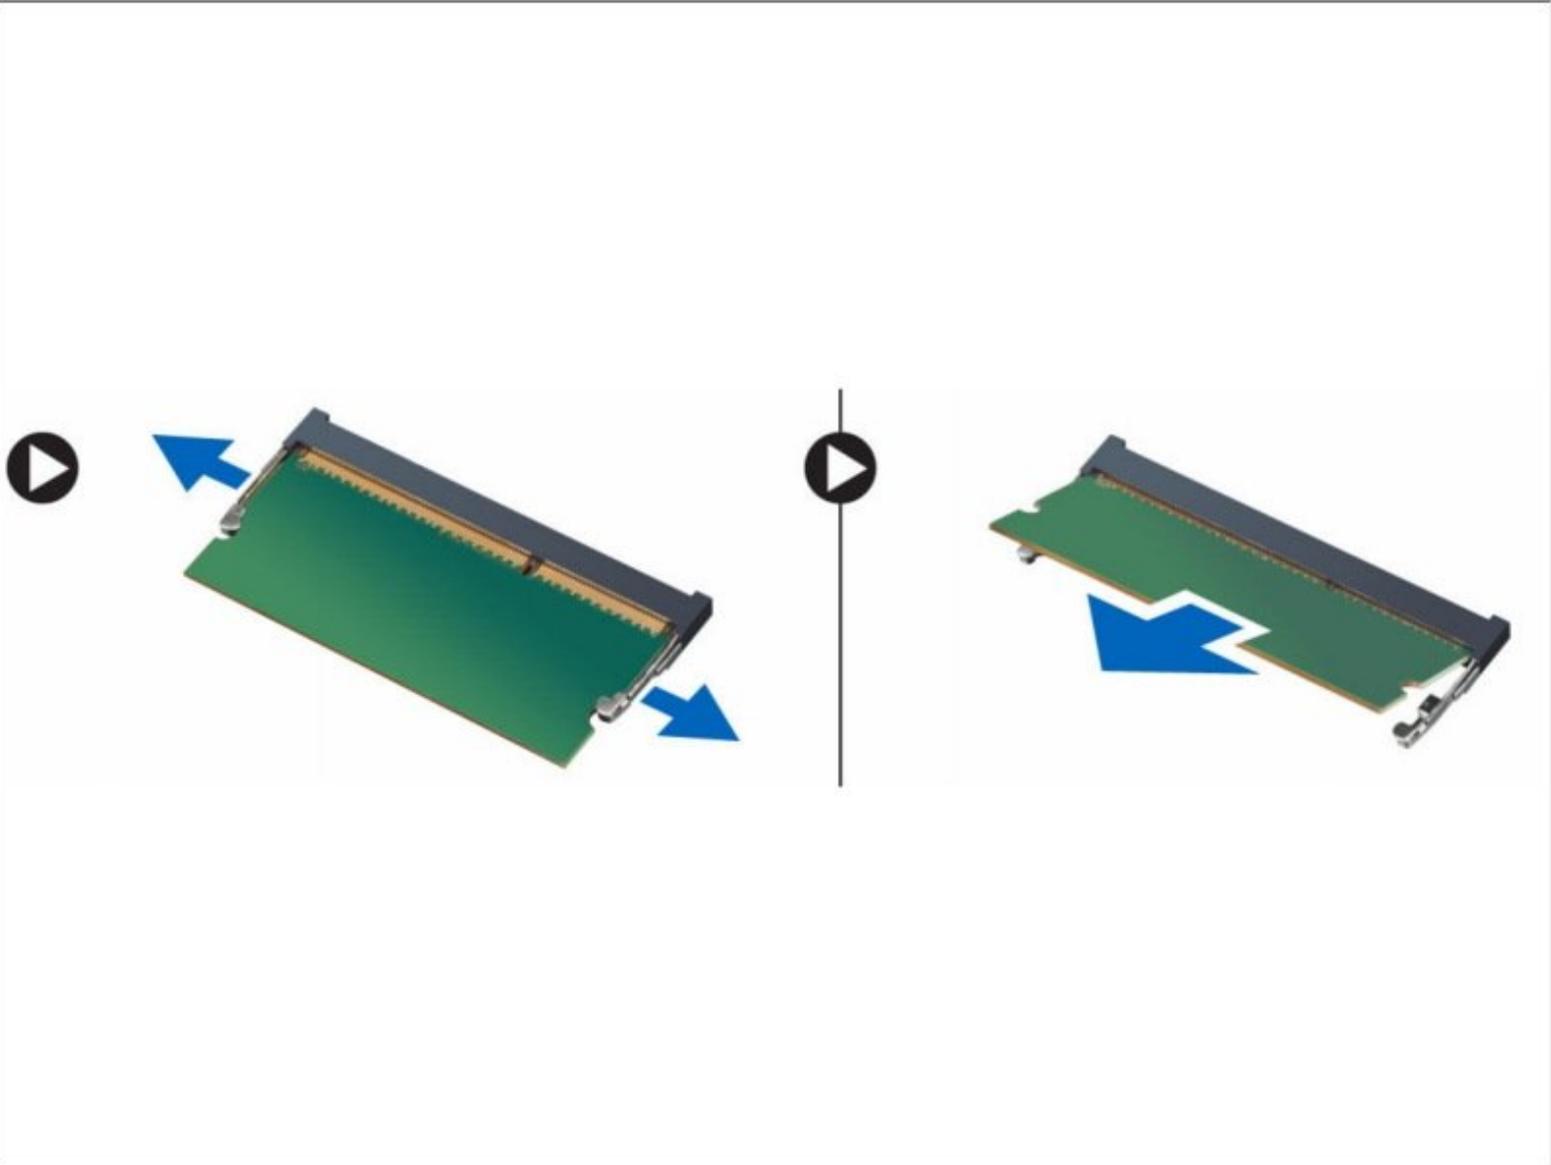

 **TOOLS:**


- [Phillips #0 Screwdriver](#) (1)
-

Step 1 — Removing The Optical-Disk Drive

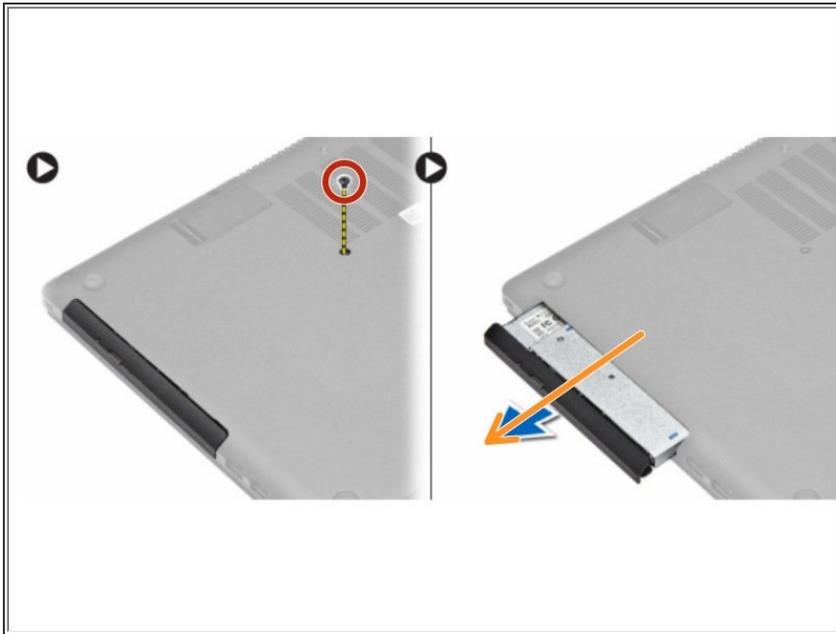

- Remove the screw that secures the base cover to the computer.
 - Pull the optical-drive and remove from the computer.
- ☛ If this is all you are doing Follow Step In Reverse if not Go to Next Step.


Step 2 — Replacing the Base Cover

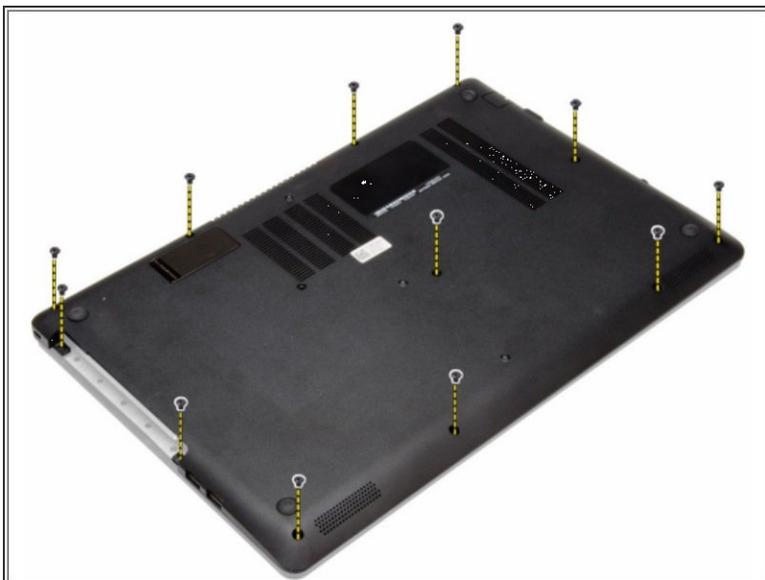

- Remove the screws that secure the base cover to the computer.
- Pry the base cover along the edges to loosen it. Lift and remove the base cover from the computer.


☛ If this is all you are doing Follow Step In Reverse if not Go to Next Step.

Step 3 — Removing the Battery

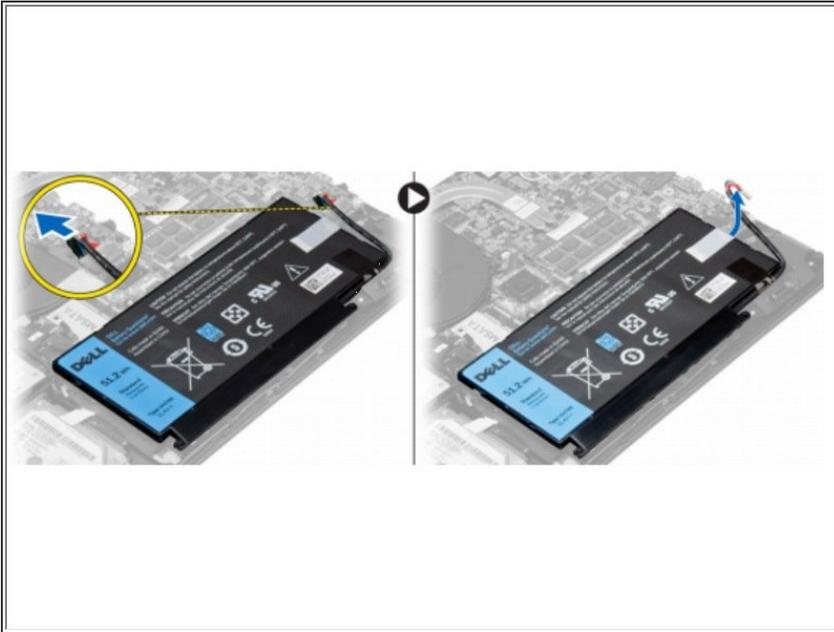

- Disconnect the battery cable from its connector on the system board.
 - Lift and remove the battery from the computer.
- ☑ If this is all you are doing Follow Step In Reverse if not Go to Next Step.

Step 4 — Removing the Memory Module

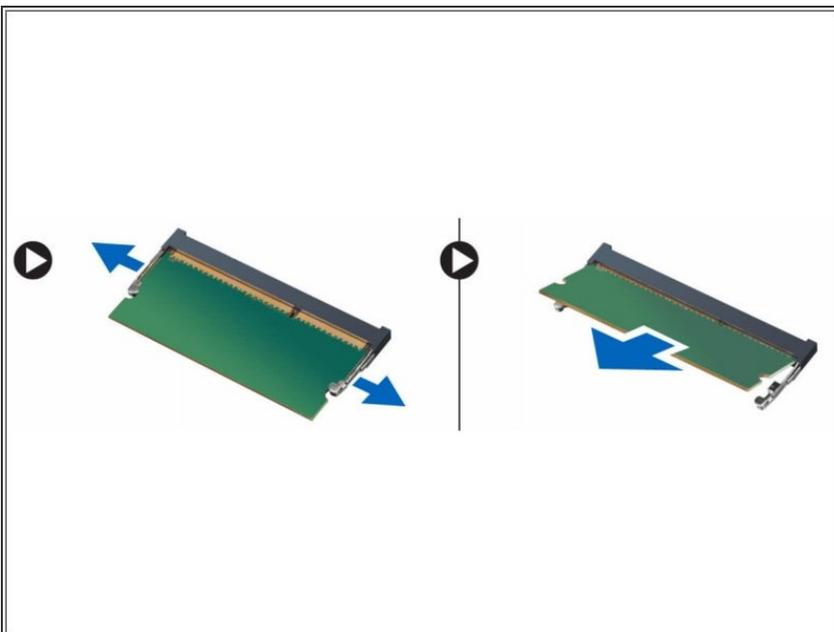

- Pry the securing clips away from the memory module until it pops-up. Remove the memory module from its connector on the system board.
- ☑ If this is all you are doing Follow Step In Reverse if not Go to Next Step.