


# Dell Vostro 3450 Memory Module Replacement

In this guide, we will show you how to remove...

Written By: Johnathan Hammond

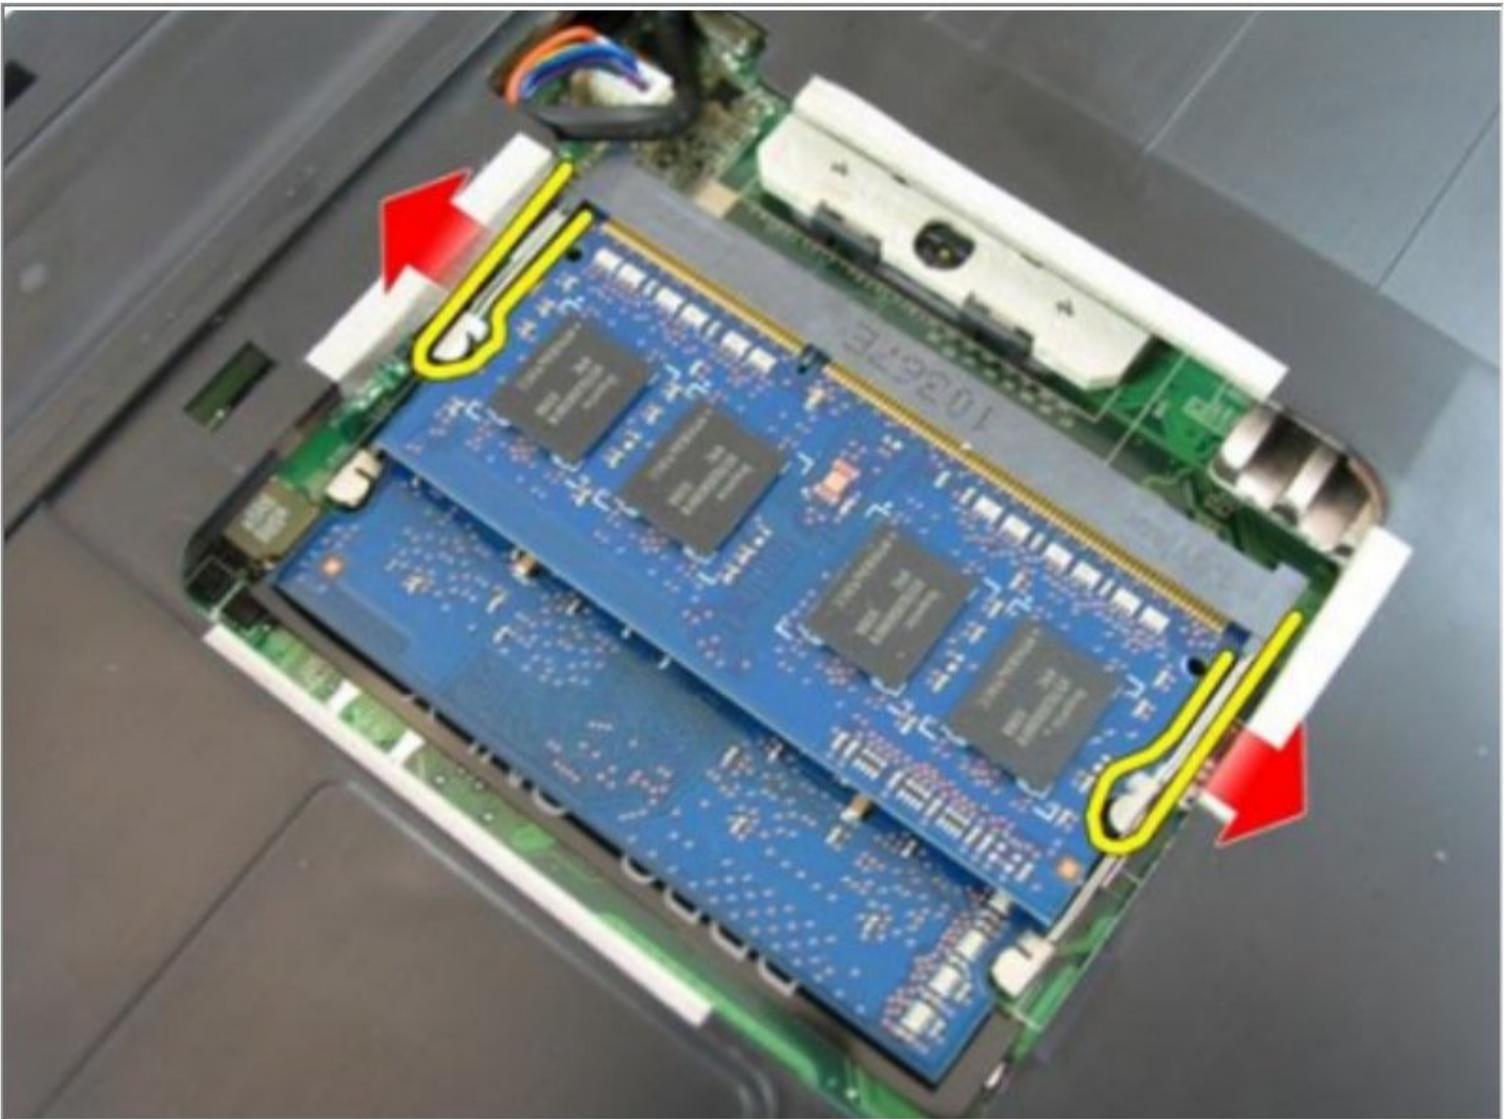

# INTRODUCTION

In this guide, we will show you how to remove and replace the Memory Module.

## TOOLS:

Phillips #0 Screwdriver (1)

### Step 1 — Unlocking the Battery



- Slide the left and the right battery release latches to the unlock position.

## Step 2 — Removing the Battery




- Slide the battery and remove it from the computer.

## Step 3 — Loosen the Screw




- Loosen the screw that secures the memory door.

## Step 4 — Removing the Memory Door

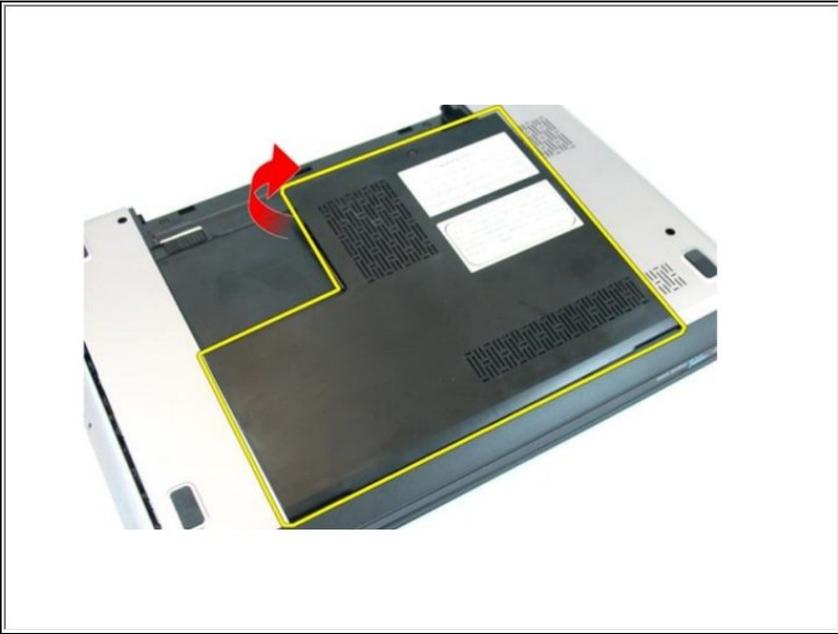


- Pry up the memory door near the screw hole, lift and remove it.
- ☒ If this is all you are doing Follow Step In Reverse if not Go to Next Step.

## Step 5 — Popping up the Memory Module

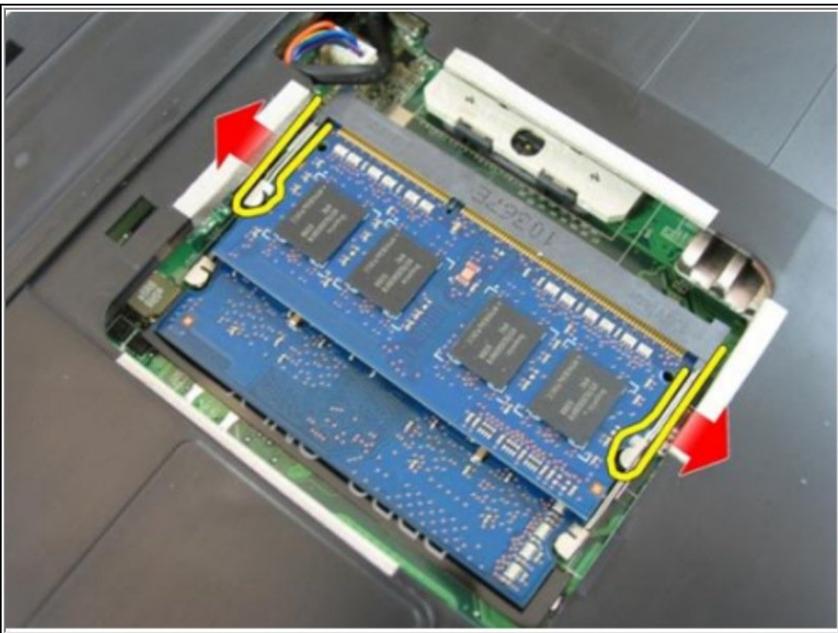

- Pry the retention clips away from the memory module until it pops up.

## Step 6 — Remove the Memory Module

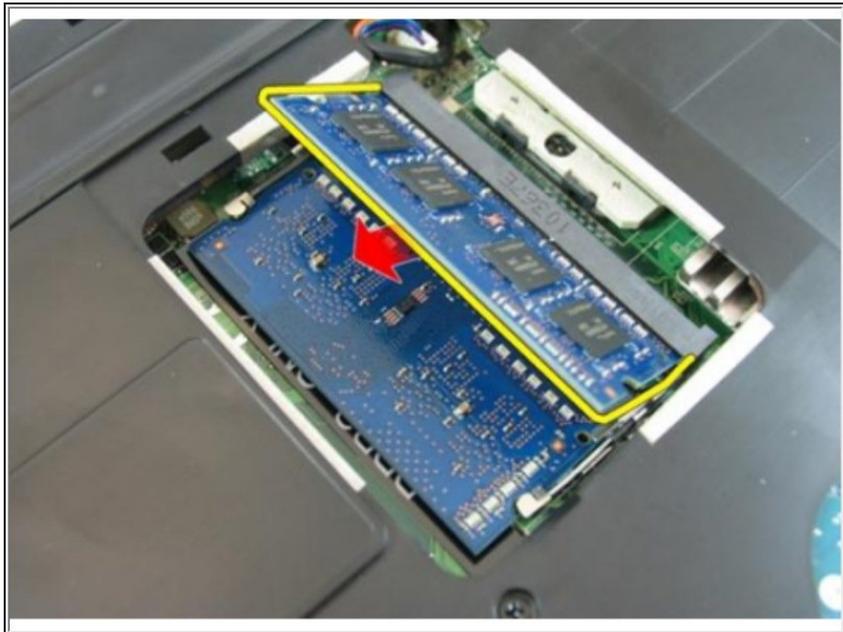

- Remove the memory module from its connector on the system board.