


# **Nokero N400 LED Panel Replacement**

This guide will show how to remove and replace the LED light panel within the Nokero N400 Solar Flashlight.

Written By: Kyle Burwell

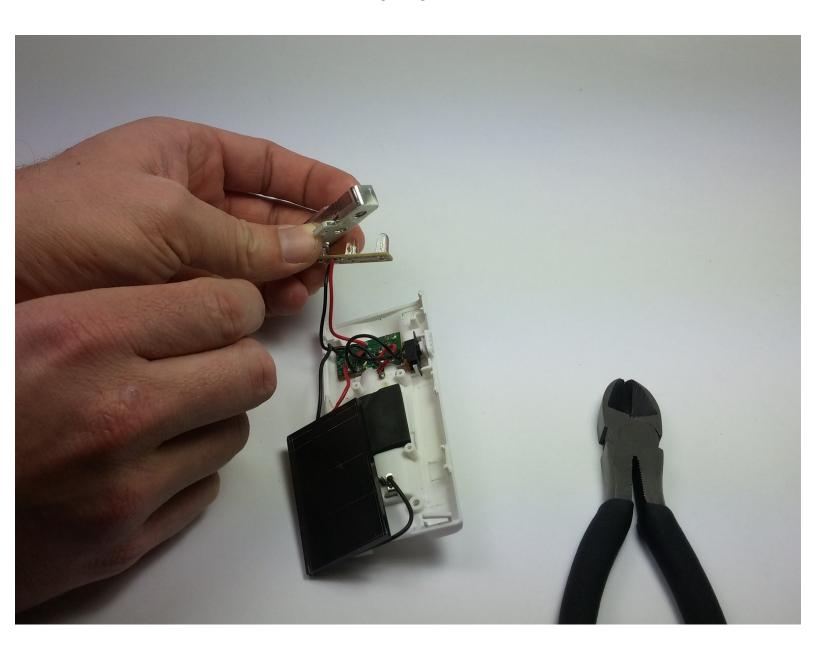

## **INTRODUCTION**

This guide will teach you how to safely cut wires to remove the LED light panel component from the rest of the device and replace it with a new one.




## **TOOLS:**

- Phillips #1 Screwdriver (1)
- iFixit Opening Tools (1)
- Flush Wire Cutters (1)

## **Step 1** — Remove Battery Cover







- Press down firmly to remove the battery cover and display battery.
- Then remove the battery.


## **Step 2** — **Unscrew Back Cover**






Remove the 7mm Phillips #1 screw.


## Step 3 — Pry Open Back Cover

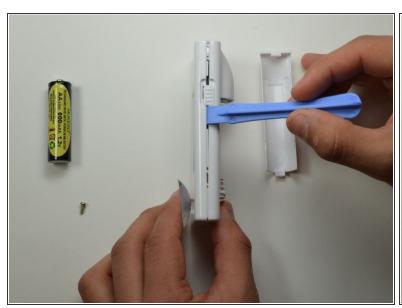


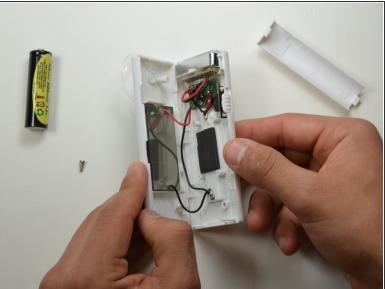

- Place the plastic opening tool in between the two plastic panels and slowly work your way around the device.
- Unlatch the clips on the inside and pull device apart.
- (i) Some clips will break when forced open.


#### Step 4 — Removing the LED Panel

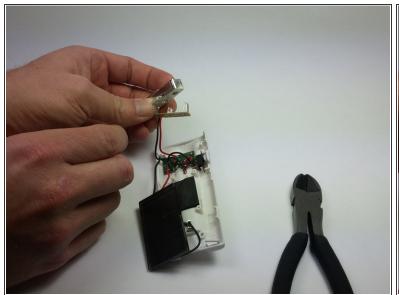

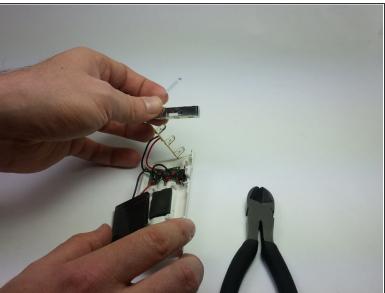

- With the back cover of the device removed, lightly pull up on the LED assembly to lift it out of its housing.
- The LED assembly will separate into three components; the light board, outer housing, and plastic lens.

## Step 5

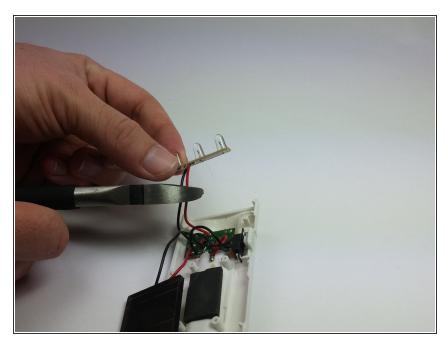

- Set the outer housing and plastic lens aside.
- Take a pair of pliers and cut the red and black wires connected to the light board.
- (i) Make sure to cut just below the light board.
- To install the new light board, you will need to splice or solder the wires to the new light board.

To reassemble your device, follow these instructions in reverse order.