


# Minolta Maxxum STsi Back Clock Button Replacement

This guide will show you how to replace the...

Written By: Jacobe Labog

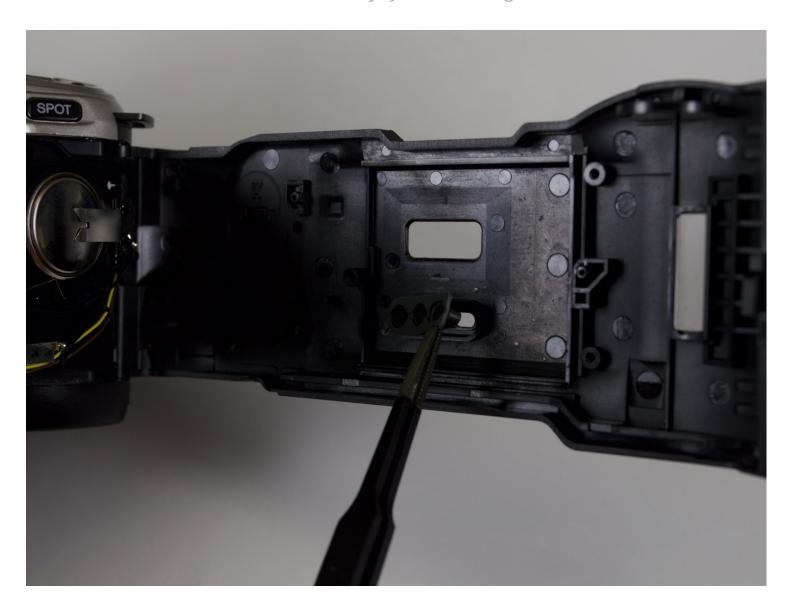

#### **INTRODUCTION**

This guide will show you how to replace the back clock button for your Minolta Maxxum STsi.

### TOOLS:

Phillips #00 Screwdriver (1) Tweezers (1)

### Step 1 — Back Clock Button



 Open the back panel by firmly pressing up on the back-cover release on the lower right side of the camera.

### Step 2









• Remove the black case by gently lifting it with your fingers and rotating counterclockwise.

## Step 3

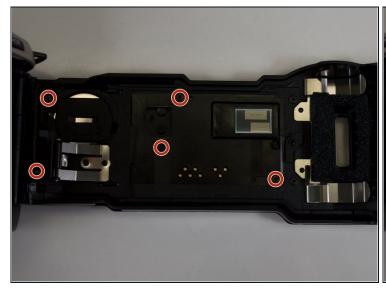

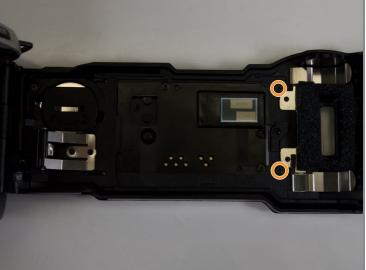

- Remove the five black Phillips #00 2.5 mm screws from the back panel.
- Also remove the two black Phillips #00 5.0 mm screws from the back panel.

### Step 4



 Use the <u>tweezers</u> to carefully peel back the adhesive foam connecting the back panel to the case and remove the panel.

### Step 5





• Use the tweezers to carefully peel off the rubber clock button.

To reassemble your device, follow these instructions in reverse order.