



# M3t Kiosk Preventative maintenance

This guide will hopefully show you how to do Preventative maintenance on a M3t Kiosk.

Written By: Timothy Morse



## Step 1 — Handle and Lock



- Make sure the door lock and handle are in good working order and not bent or loose

## Step 2 — Opt cords



- Check the opt cords to make sure they aren't broken or crimped

## Step 3 — Opt Lights




- Make sure all the opt box lights that are supposed to be on are on.

## Step 4 — Dispenser Belts




- Clean belts on top and on the back of the dispenser.

## Step 5 — Test Dispense

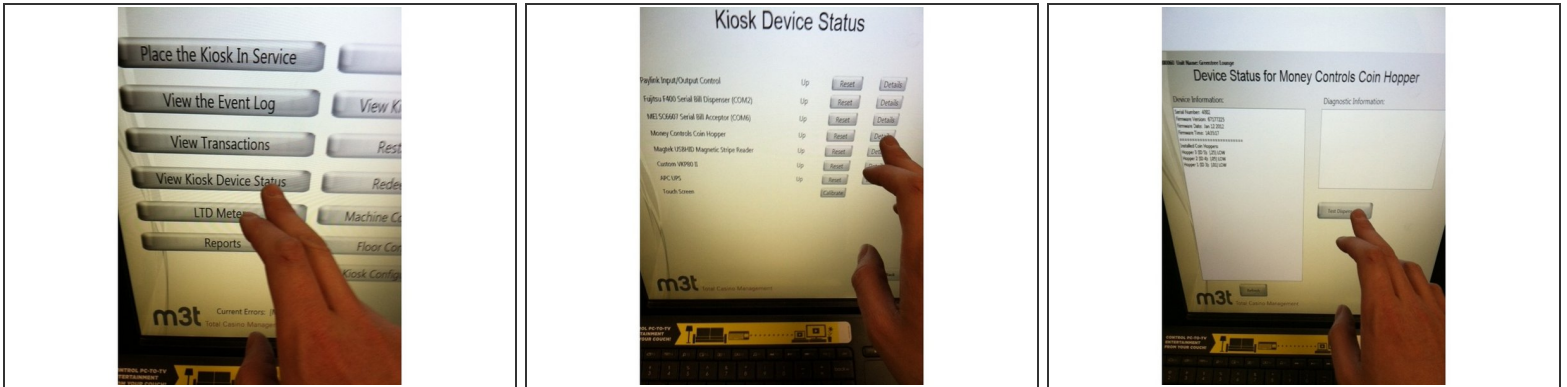

- Test dispense the coin hoppers and the cash dispenser

## Step 6 — Test Dispense (continued)

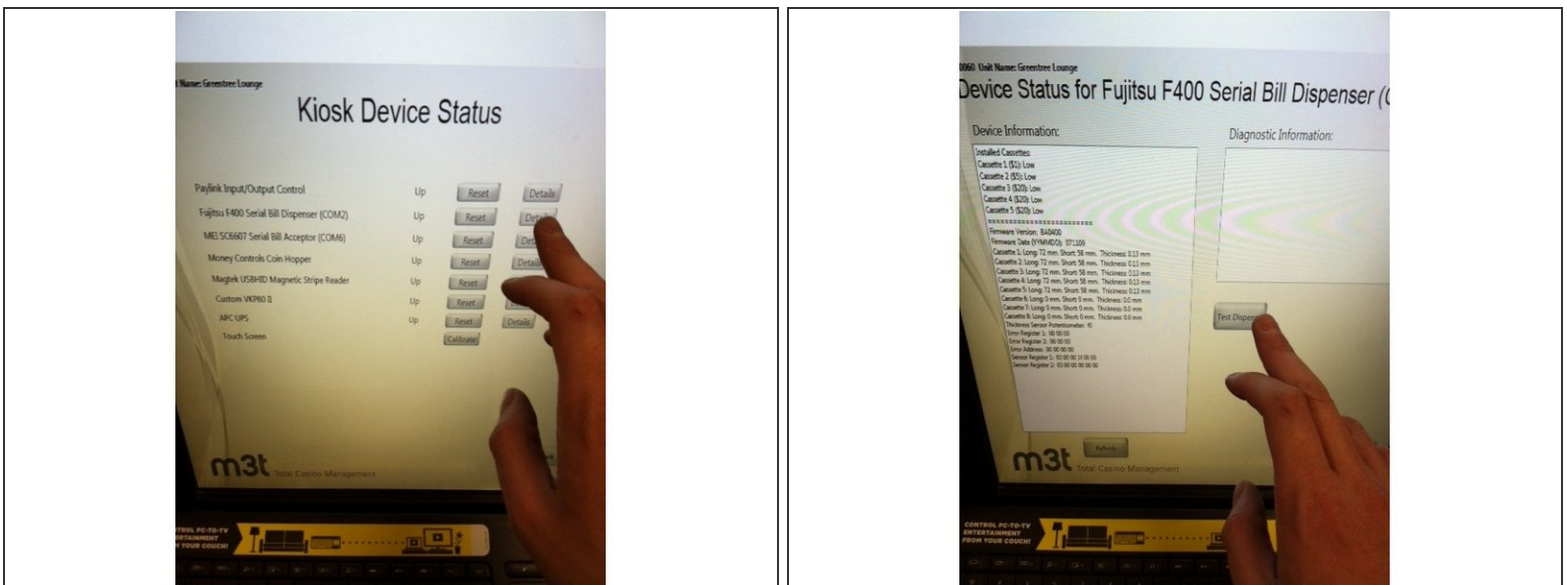


- (Continued)

## Step 7




- Check the coin hoppers to make sure nothing is in it other than coins (like rubber bands or something that was dropped in it)

## Step 8 — Fans

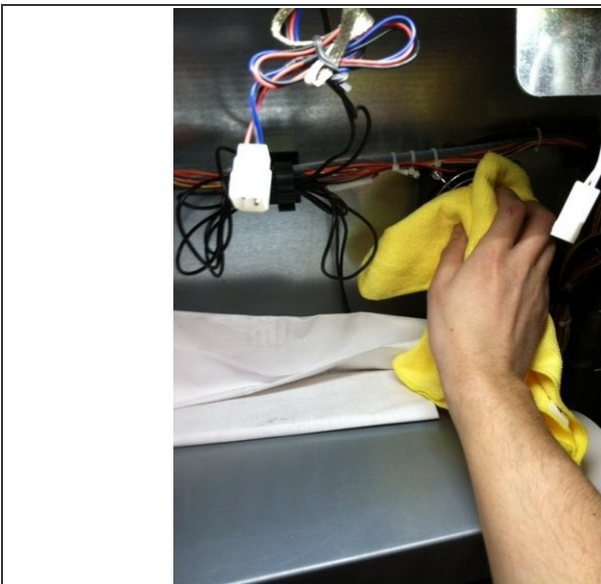

- Clean any dust off of the fans

## Step 9 — Printer

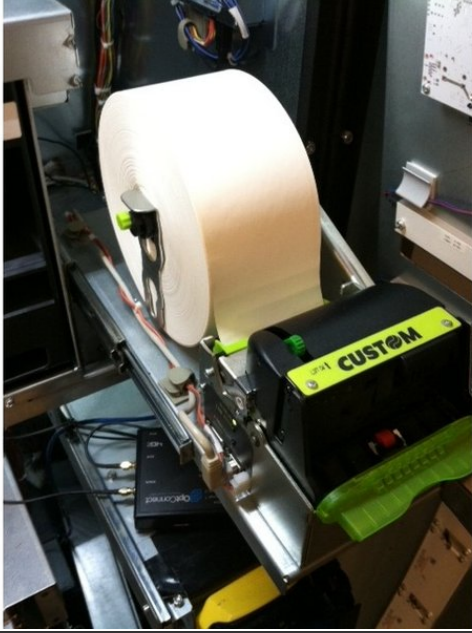

- Check the printer for paper and put in more if it's needed

## Step 10



- Open and blow out the printer to remove any loose paper

## Step 11 — Clean Bill Validator




- Run a cleaning strip through the BV

## Step 12 — Bill Validator board



- Check for coins on the BV board.

## Step 13 — Bill Validator protector

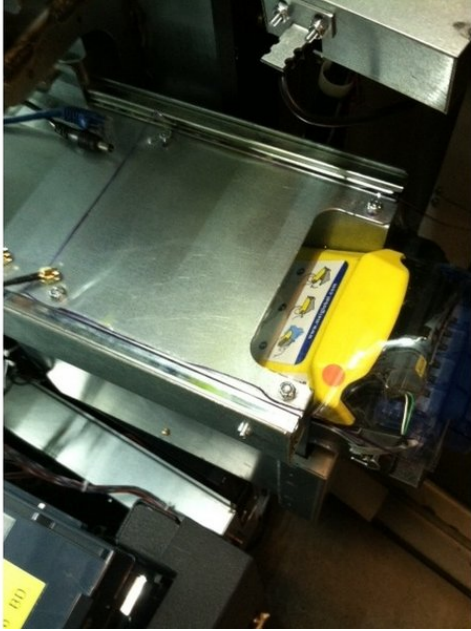

- Put a board protector on if it's missing and you have one available

## Step 14 — Screen cleaning



- Clean the touch screen

## Step 15 — Door lights



- Check to see if the door lights are on and working

To reassemble your device, follow these instructions in reverse order.