




# LG Ally VS740 Camera Flash Replacement

Here are a few easy steps to replace your camera flash

Written By: Billy Carias

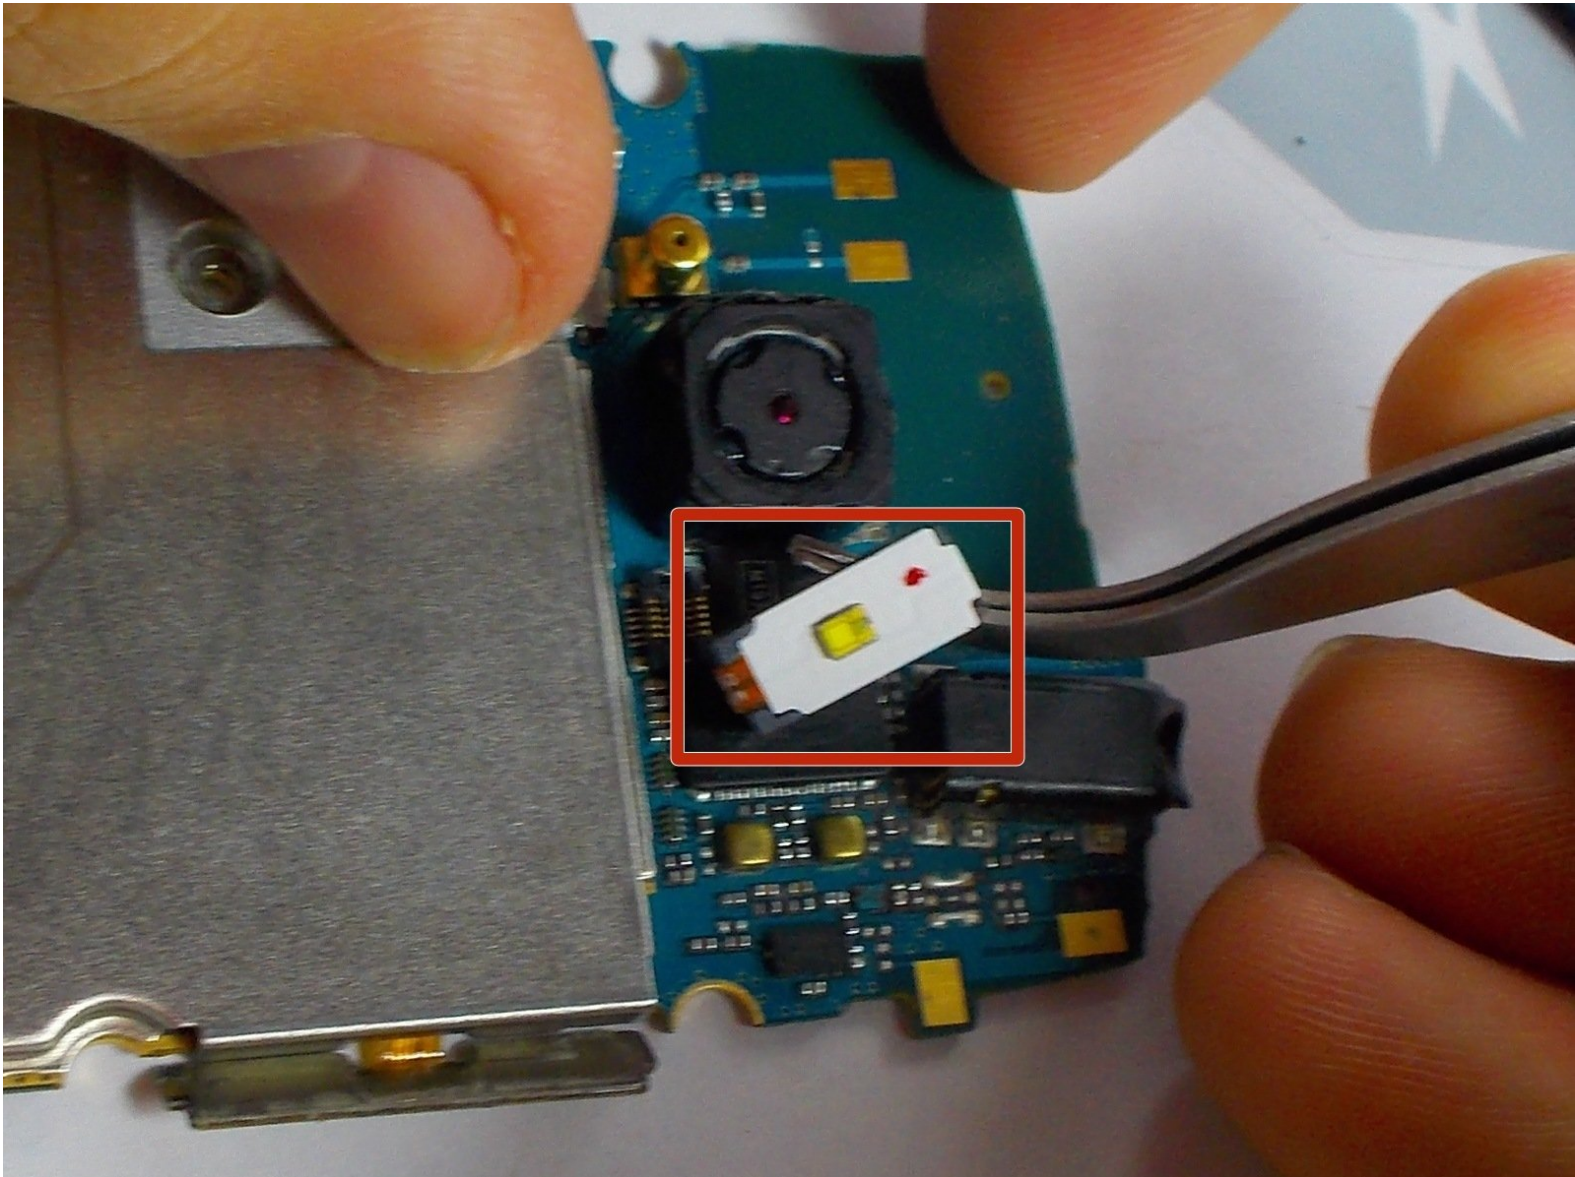



## TOOLS:

- [Essential Electronics Toolkit](#) (1)
-

## Step 1 — Camera Flash



- Hold phone in hand, then flip to battery pack
- Take off battery cover


## Step 2



- Remove battery
- Locate the six surrounding screws located on the edge of the inner compartment, including the two screws on the metal piece where the battery was once placed.




## Step 3

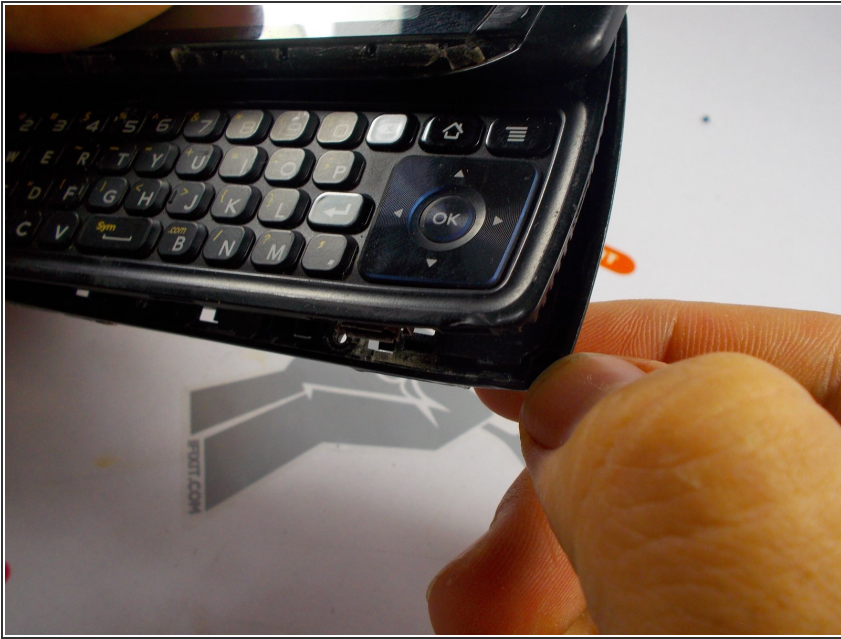


- Slide the phone open. Notice on the edges around the keyboard, there is a thick casing. Remove this casing, instructions below...
- Placing two dominant fingers on the back plate where the battery was, use your thumb finger nail (or prying utensil) and place it on the edge of this thin casing. Firmly, push down with your finger nail (prying utensil) around the casing from left to right. Disconnect casing from keyboard section. Flip the phone over and remove it.

## Step 4

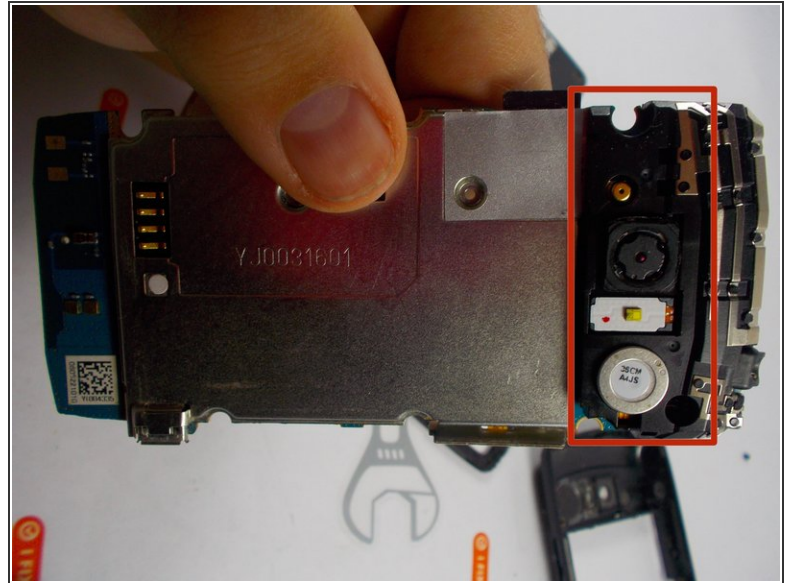

- Using your prying tool, lift the green circuit board platform off the black casing and gently disconnect the connection point between the tether and the green circuit board.
- Flip phone over, and notice where the camera lies on the other side, there are three small clips connecting a black casing over the section of the phone. Gently using your hands or the prying tool, take these clips off.

## Step 5

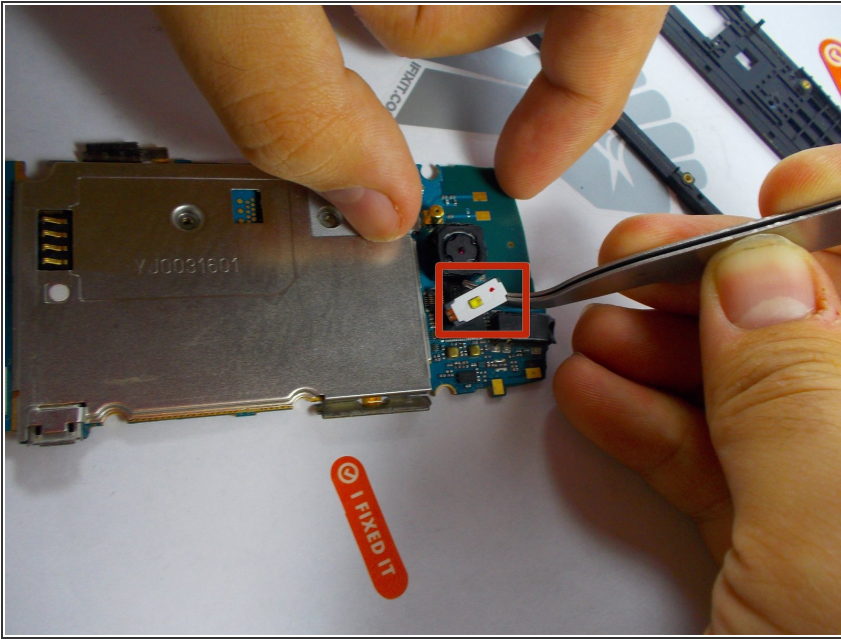

- The white rectangle with the yellow square is the flash. Gently lift up and disconnect flash module. Take your new flash and aligning the connection point to the connection hole, push it down firmly until it is snug in place. Follow the steps backwards to put phone back together.

To reassemble your device, follow these instructions in reverse order.