



Lenovo Tab 2 A10-70 Front Glass and Digitizer Replacement

Replacing a broken front glass/digitizer screen on the Lenovo Tab 2 10" tablet

Written By: Amber Wooldridge



INTRODUCTION

The screen on the Lenovo Tab 2 A10-70 is a pain in the tush to remove but if you can get past the adhesive it's not too hard!!!! Don't Give up. (Please excuse the pictures in this guide, the preggo body looks even bigger in them!!!!)

TOOLS:


- [Spudger](#) (1)
 - [Tweezers](#) (1)
 - [Heat Gun](#) (1)
-

Step 1 — Remove rear casing






- It is extremely easy to remove the plastic casing. Just slide your spudger (or fingernail if they are strong) around the edge to remove

Step 2 — detach the old digitizer cable

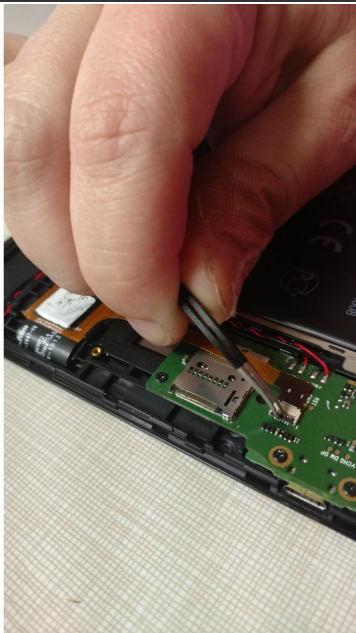

- Using your fingernail or tweezers lift the holding flap and disconnect the digitizer cable for the old screen

Step 3 — Removing the old Broken Glass/Digitizer

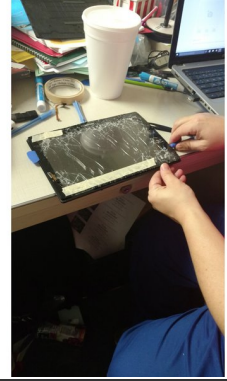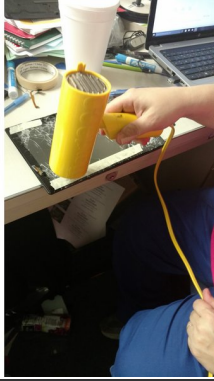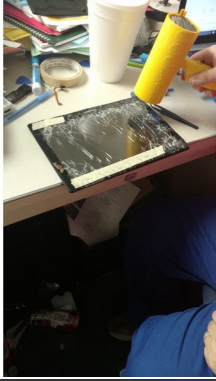



- Please be very careful!, This glass shatters easily and shards will go flying if you are rough
- The glass is connected to the frame and LCD by the world's strongest adhesive, took me well over an hour to remove the old screen
- Using a heat gun (high powered blow dryer) or those of you lucky enough to have an iopener kit slowly heat your way around the glass, start in a corner and work your spudger in.
- Make sure you slide your spudger straight in to avoid the lcd There is a nice gap but the adhesive is two part!

Step 4 — Clean up!





- Clean your Edges
- Using your spudger or a razor knife clean off any left behind adhesive

Step 5 — Install new Glass/Digitizer

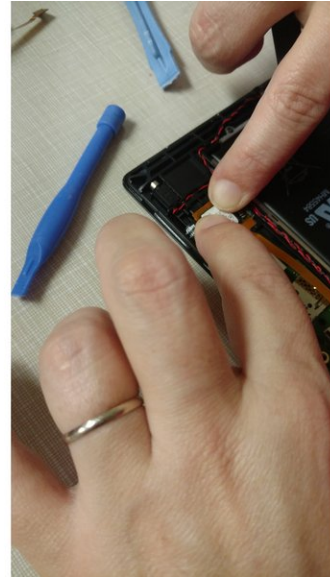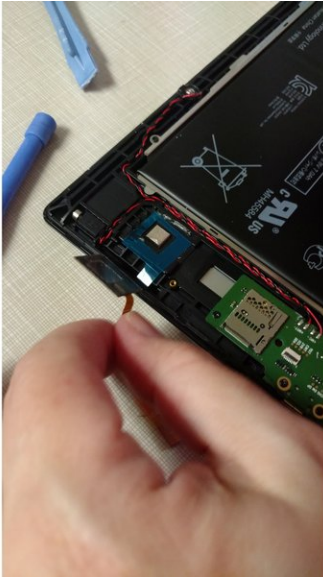


- Carefully Slide the digitizer cable through the opening in the case
- Flip over case and reconnect the new digitizer cable
- I then tested to make sure the screen and digitizer worked before adhesive :)

Step 6 — Adhere your new screen

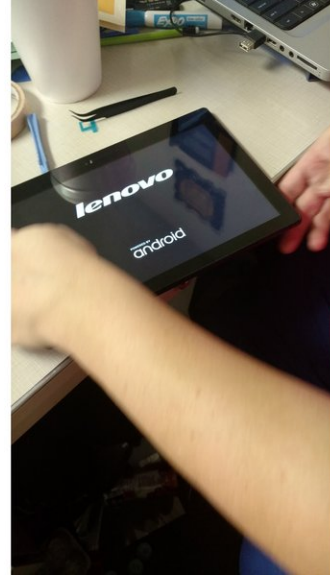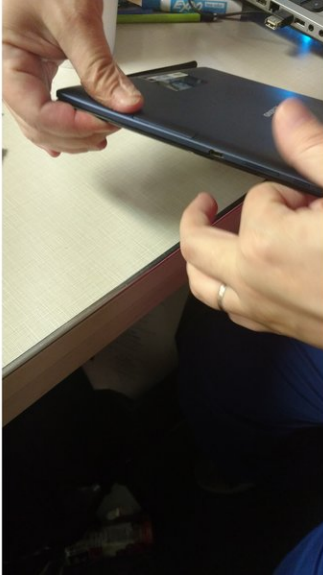

- The Screen I ordered came with adhesive already on it, but I added some 3M tape too
- Press the Screen firmly into place
- Then replace the back cover!

Step 7 — Finish!

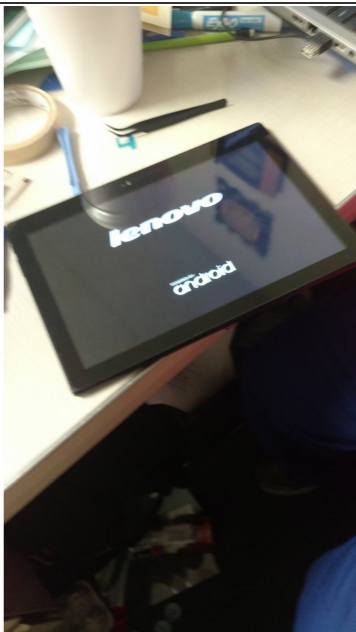

- Test your work and Be proud, not an easy task but you completed it!!!!

To reassemble your device, follow these instructions in reverse order.